


163-23-9768

15KV RIPCORD (2)

#1/0 19str AL FULL Neutral

STRANDFILLED

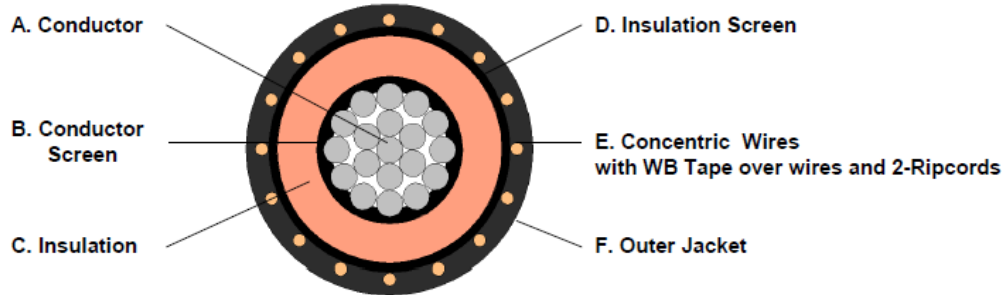

TEMPERATURE RATINGS
105°C - Continuous, 140°C - Emergency
250°C - Short Circuit

1/C 1/0 19X ALUMINUM FILLED
STRAND -SS- 220 OKOGUARD EPR
- 030 SC EPR - 16 X #14
COPPER CONC WIRES (FULL
NEUTRAL) - 2 RIPCORDS - WB
TAPE - 080 OKOLENE PE W/3 RED
STRIPES - SEQ PRINT - 15KV

Dimensions	Thickness (in.)		Diameter (in.)		
	Nominal	Minimum Point		Nominal	
Conductor	N/A			0.356	
Cond. Screen	0.015	0.012		0.389	
Insulation	0.220	0.210		0.835	
Insul. Screen	0.034	0.030		0.917	
Conc. Neutral	0.0641			1.044	
Outer Jacket	0.080	0.070		1.236	
	Cable Weight (lbs./M'):		780		