



1 (2) Position Single-Phase Cutout / Arrester Bracket



1SBM—AMSB Series
includes Spacer Bar


T653-1343 - Spacer
Bar Assembly only

1SBM—AMB Series
includes bolt



1/2" - 13 x 2"
Captive Carriage Bolt


Keyhole for 5/8"
Mounting Bolt

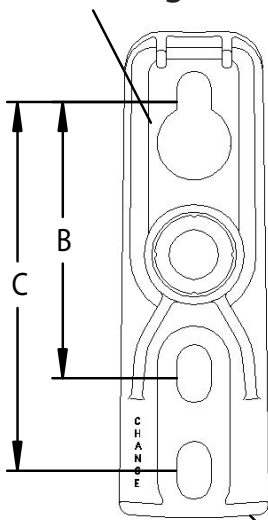

B Dimension is 6"
C Dimension is 8"

RUS Accepted.

Bandable

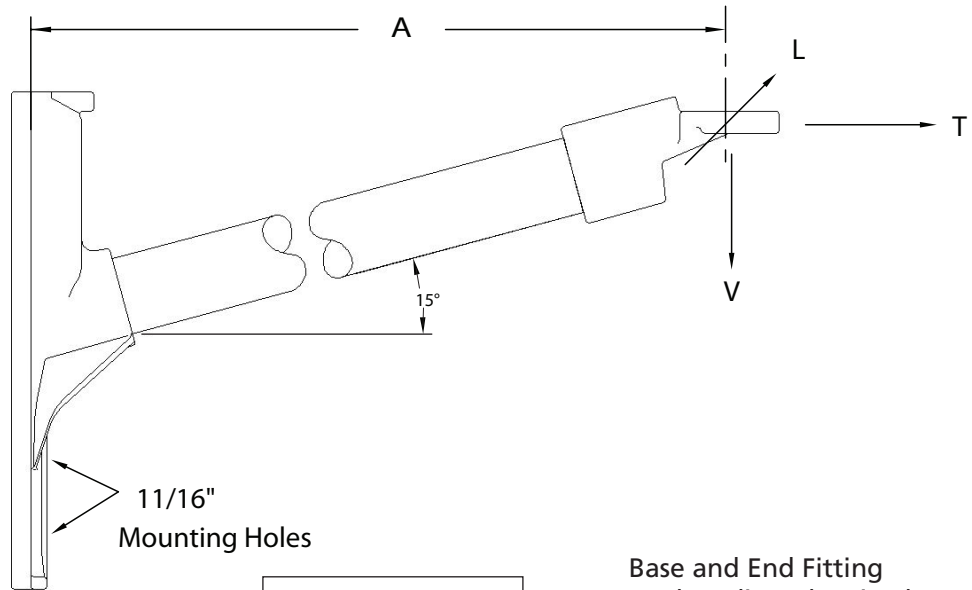

1SBM—AM Series

Base and End Fitting
are hot-dip-galvanized
ductile iron.

Catalog Number	Length A	Minimum Ultimate*			Weight (Each)
		Vertical V	Longitudinal L	Transverse T	
Medium Duty 1½" (38 mm) Dia. Fiberglass Rod					
1SBM15AM	15" (38.1 cm)	1500 lbs. (675 kg)	1100 lbs. (495 kg)	1500 lbs. (675 kg)	6.6 lbs. (3 kg)
1SBM18AM	18" (45.7 cm)	1200 lbs. (540 kg)	950 lbs. (428 kg)	1500 lbs. (675 kg)	7 lbs. (3.2 kg)
1SBM21AM	21" (53.3 cm)	1000 lbs. (450 kg)	800 lbs. (360 kg)	1500 lbs. (675 kg)	7.4 lbs. (3.3 kg)
1SBM24AM	24" (61 cm)	900 lbs. (405 kg)	700 lbs. (315 kg)	1500 lbs. (675 kg)	7.8 lbs. (3.5 kg)
1SBM15AMB	15" (38.1 cm)	1500 lbs. (675 kg)	1100 lbs. (495 kg)	1500 lbs. (675 kg)	6.6 lbs. (3 kg)
1SBM18AMB	18" (45.7 cm)	1200 lbs. (540 kg)	950 lbs. (428 kg)	1500 lbs. (675 kg)	7 lbs. (3.2 kg)
1SBM21AMB	21" (53.3 cm)	1000 lbs. (450 kg)	800 lbs. (360 kg)	1500 lbs. (675 kg)	7.4 lbs. (3.3 kg)
1SBM24AMB	24" (61 cm)	900 lbs. (405 kg)	700 lbs. (315 kg)	1500 lbs. (675 kg)	7.8 lbs. (3.5 kg)
1SBM15AMSB	15" (38.1 cm)	1500 lbs. (675 kg)	1100 lbs. (495 kg)	1500 lbs. (675 kg)	6.6 lbs. (3 kg)
1SBM18AMSB	18" (45.7 cm)	1200 lbs. (540 kg)	950 lbs. (428 kg)	1500 lbs. (675 kg)	7 lbs. (3.2 kg)
1SBM21AMSB	21" (53.3 cm)	1000 lbs. (450 kg)	800 lbs. (360 kg)	1500 lbs. (675 kg)	7.4 lbs. (3.3 kg)
1SBM24AMSB	24" (61 cm)	900 lbs. (405 kg)	700 lbs. (315 kg)	1500 lbs. (675 kg)	7.8 lbs. (3.5 kg)

*Recommended maximum working load is 50% of minimum ultimate ratings listed.

Consult factory for additional lengths.

Add "SC" suffix to the end of the catalog number to denote Silicone Coated rod