



3 Position (Cloverleaf) Single-Phase Cutout / Arrester Bracket

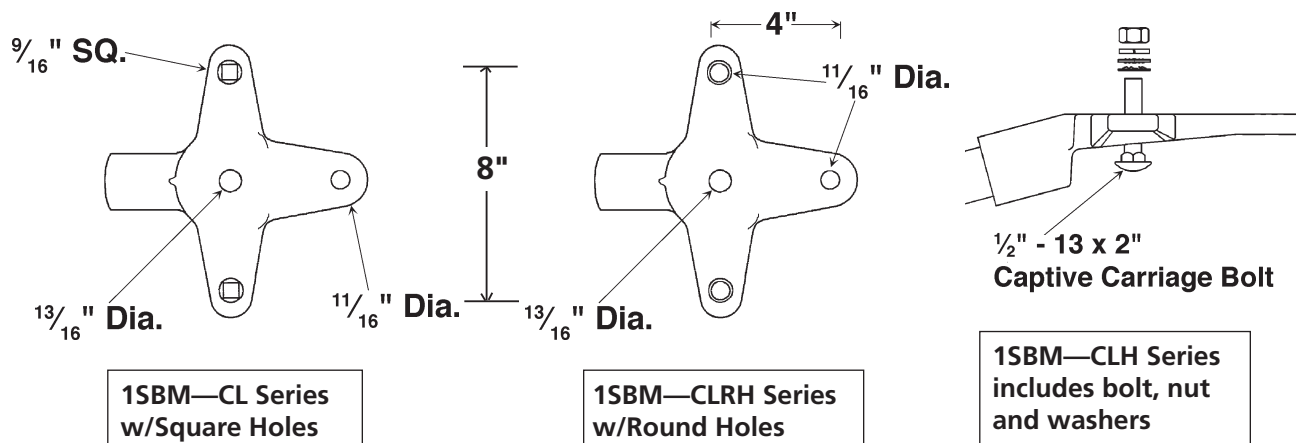

Keyhole for 5/8" Mounting Bolt

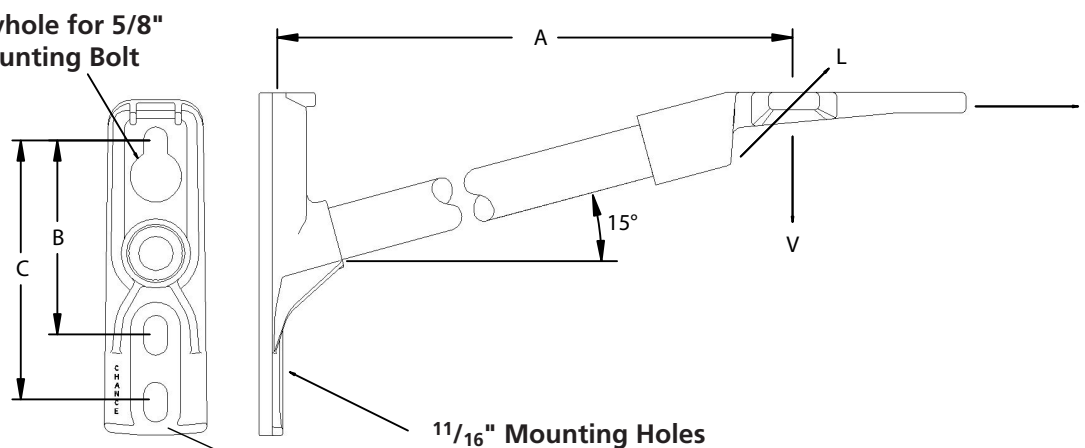

Bandable

B Dimension is 6"

C Dimension is 8"

Base is hot-dip galvanized ductile iron and End Fitting is aluminum alloy.

RUS Accepted.

Catalog Number	Length A	Minimum Ultimate*			Weight (Each)
		Vertical V	Longitudinal L	Transverse T	
Medium Duty 1½" (38 mm) Dia. Fiberglass Rod					
1SBM12CL	12" (30.5 cm)	1800 lbs. (810 kg)	1400 lbs. (630 kg)	10000 lbs. (4500 kg)	6.6 lbs. (3 kg)
1SBM18CL	18" (45.7 cm)	1200 lbs. (540 kg)	950 lbs. (428 kg)	10000 lbs. (4500 kg)	7.4 lbs. (3.3 kg)
1SBM12CLH	12" (30.5 cm)	1800 lbs. (810 kg)	1400 lbs. (630 kg)	10000 lbs. (4500 kg)	6.6 lbs. (3 kg)
1SBM18CLH	18" (45.7 cm)	1200 lbs. (540 kg)	950 lbs. (428 kg)	10000 lbs. (4500 kg)	7.4 lbs. (3.3 kg)
1SBM12CLR	12" (30.5 cm)	1800 lbs. (810 kg)	1400 lbs. (630 kg)	10000 lbs. (4500 kg)	6.6 lbs. (3 kg)
1SBM18CLR	18" (45.7 cm)	1200 lbs. (540 kg)	950 lbs. (428 kg)	10000 lbs. (4500 kg)	7.4 lbs. (3.3 kg)

*Recommended maximum working load is 50% of minimum ultimate ratings listed.

Consult factory for additional lengths.

Add "SC" suffix to the end of the catalog number to denote Silicone Coated rod

