


Catalog Number Key - Veri*Lite Line Post Insulators - Silicone



Polymer Type

80S = Veri*Lite SR Polymer

Hardware Finish

0 = Standard

Rating

15 = 15kV (1.5" rod)
 25 = 25kV (1.5" rod)
 28 = 35kV (1.5" rod)
 46 = 46kV (1.75" rod)
 69 = 69kV (1.75" rod)

Bottom End Fitting

00 = Gain Base-Transverse
 09 = 3/4" Stud Base
 10 = 7/8" Stud Base


Top End Fitting

0 = Teardrop Blade*
 1 = Horizontal Clamptop
 2 = Vertical Clamptop
 5 = 5" B.C. Through
 6 = Horizontal Clamptop (longer pintle bolt)
 A = Vertical Clamptop (longer pintle bolt)
 F = 'F' Neck
 U = Universal Clamp Fixed Saddle
 H = Hotstick Operable Universal Clamp


*Teardrop Blade only available for 46-69kV

Dimensioning


0 = ANSI C29.18 Quality Conformance Tests
 6 = Sample Tests
 9 = Special

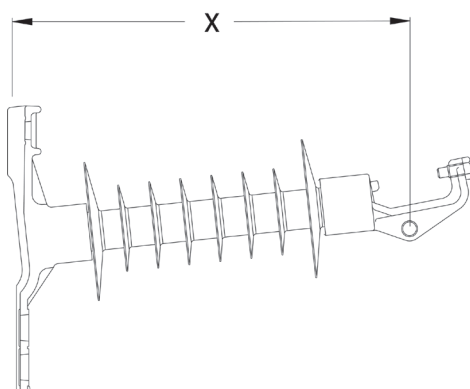

Horizontal Clamptop & Gain Base
(0100)

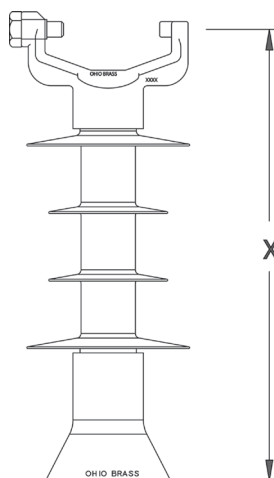

Vertical Clamptop & Stud
Base (0209 & 0210)

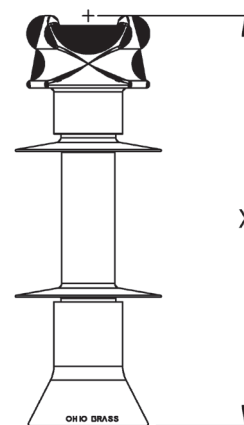

F-Neck & Stud Base
(0F09 & 0F10)