
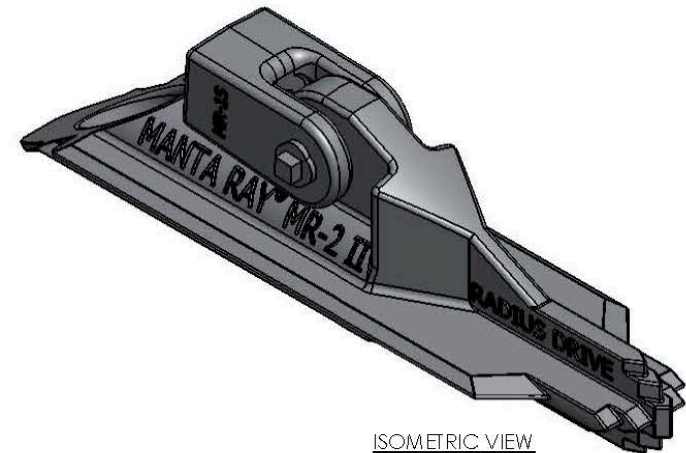


8 7 6 5 4 3 2 1

PAPER SIZE	CATALOG NUMBER
B	20199-UT-II


NOTES: UNLESS OTHERWISE SPECIFIED:

- 1) MECHANICAL ULTIMATE CAPACITY: 40,000 LBS [177.9kN]
- 2) MAXIMUM WORKING LOAD: UP TO 27,000 LBS [120.1 kN]
(THE VALUE IS SOIL AND ANCHOR ROD DEPENDANT)
- 3) AVERAGE WEIGHT: 10.2 LBS [4.6 kg]
- 4) FINISH: HOT DIP GALVANIZED

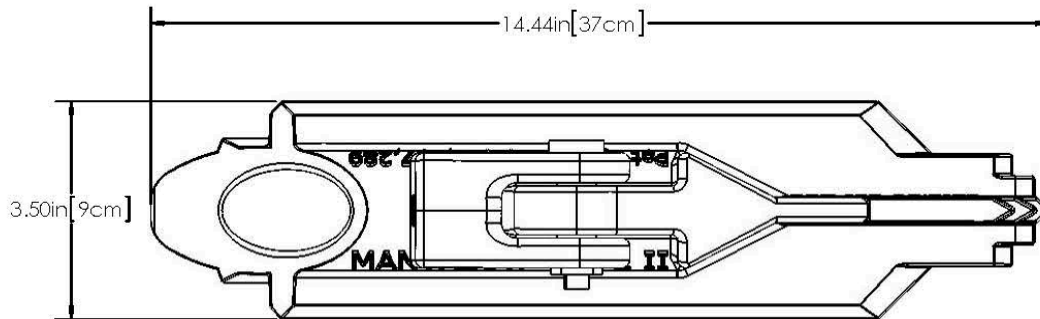

ISOMETRIC VIEW
SCALE: 1:2

THREAD REFERENCE:
1-8 UNC - 2B + .020

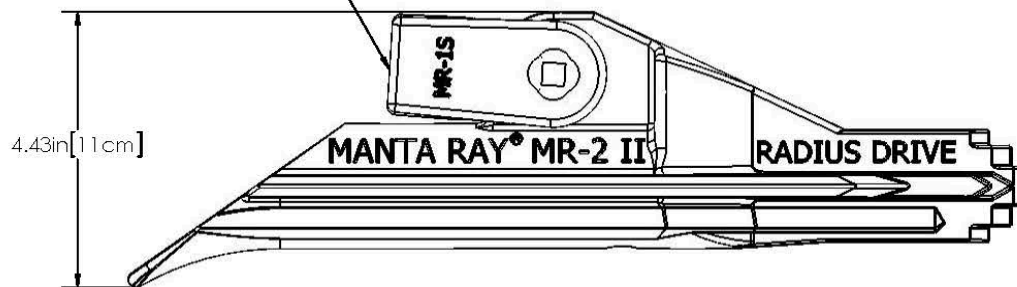

This drawing contains confidential information that is the property of MacLean Power, L.L.C. ("MacLean"). Use of MacLean's confidential information without MacLean's express written consent is strictly prohibited and may expose you to legal liability. If you believe that you received this material in error, please destroy it or return it to "MacLean Power, L.L.C., 11411 Addison Street, Franklin Park, Illinois 60131, "USA."

ODA

OUTSIDE DISTRIBUTION APPROVED: NON-PRODUCTION DRAWING



**MACLEAN
POWER
SYSTEMS**

www.maclepower.com

DRAWING NUMBER:	20199-UT-II
SHEET NAME:	SHEET 1 OF 1
PRODUCT DESCRIPTION	MR-2-1"-UTILITY-II ANCHOR/SHACKLE ASSEMBLY
DRAWN BY:	JFD
DATE:	03/06/13

8 7 6 5 4 3 2 1