


CATALOG NUMBER ORDERING INFORMATION

Example: Integral seal elbow for 1/0 stranded, 260 mil cable with a test point is: 228LEJ45T

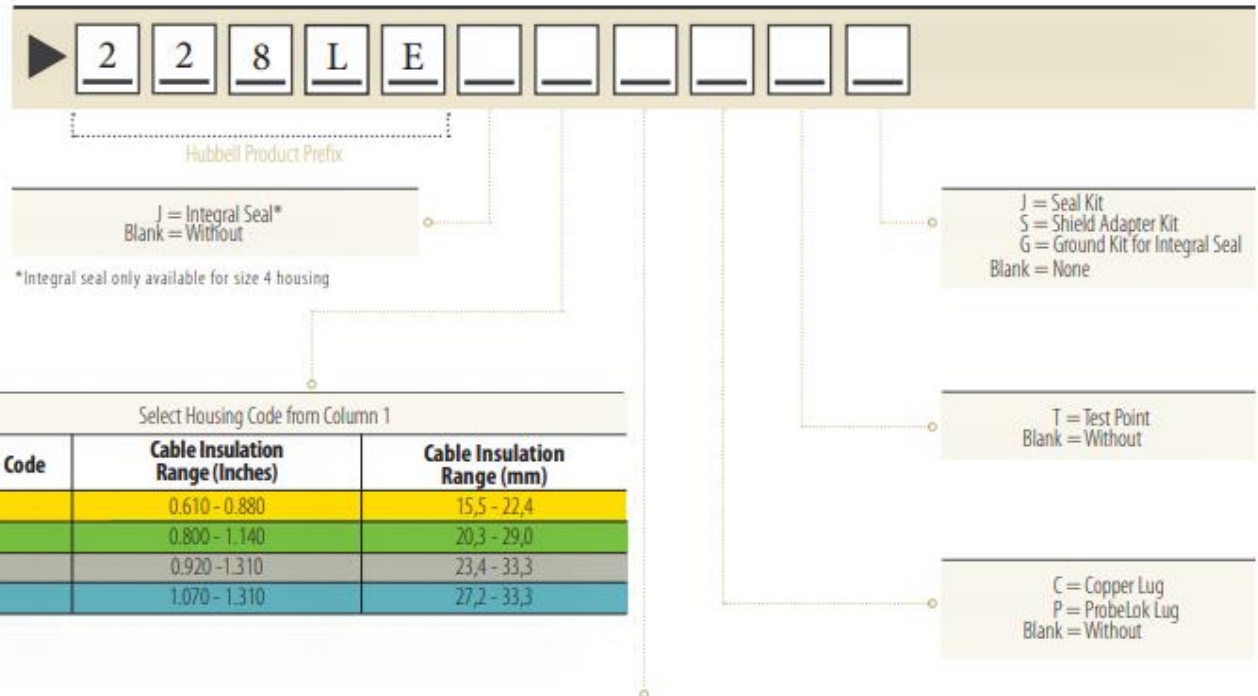

Select Housing Code from Column 1

Housing Code	Cable Insulation Range (Inches)	Cable Insulation Range (mm)
3	0.610 - 0.880	15,5 - 22,4
4	0.800 - 1.140	20,3 - 29,0
5	0.920 - 1.310	23,4 - 33,3
6	1.070 - 1.310	27,2 - 33,3

Select Connector Code from Column 1, or 0 for without Connector

Connector Code	AWG or kcmil	Stranding	15 kV - 175mil (Inches)	15 kV - 220mil (Inches)	25 kV - 260mil (Inches)	35 kV - 345mil (Inches)	35 kV - 420mil (Inches)
2	#2	Compact & Solid	0.610 - 0.705	0.700 - 0.800	0.780 - 0.880		
3	#2	Stranded & Compressed	0.635 - 0.730	0.725 - 0.825	0.805 - 0.905		
		Compact & Solid	0.645 - 0.735	0.735 - 0.830	0.805 - 0.905		
4	#1	Stranded & Compressed	0.675 - 0.770	0.765 - 0.855	0.835 - 0.935		
		Compact & Solid	0.680 - 0.775	0.770 - 0.865	0.835 - 0.940	1.010 - 1.120	1.160 - 1.260
5	1/0	Stranded & Compressed	0.715 - 0.810	0.805 - 0.905	0.875 - 0.980	1.045 - 1.155	1.190 - 1.130
		Compact & Solid	0.715 - 0.815	0.805 - 0.905	0.875 - 0.980	1.045 - 1.160	1.195 - 1.310
6	2/0	Stranded & Compressed	0.760 - 0.855	0.850 - 0.950	0.920 - 1.025	1.090 - 1.200	1.245 - 1.350
		Compact & Solid	0.765 - 0.860	0.855 - 0.955	0.925 - 1.030	1.095 - 1.205	
7	3/0	Stranded & Compressed	0.810 - 0.905	0.900 - 1.000	0.970 - 1.075	1.140 - 1.255	
		Compact & Solid	0.815 - 0.910	0.905 - 1.005	0.975 - 1.080	1.145 - 1.260	
8	4/0	Stranded & Compressed	0.865 - 0.965	0.955 - 1.060	1.025 - 1.135	1.195 - 1.310	
		Compact	0.880 - 0.965	0.970 - 1.060	1.040 - 1.135	1.210 - 1.315	

*These ranges are taken from the AEIC/ICEA industry cable standards