


-NOTES-

1. HOT DIP GALVANIZED PER ASTM A-153.
2. EXTENSION SECTION LENGTHS ARE NOMINAL, EXPECT SOME MINOR VARIANCE.
3. CLEVIS BOLTS; 1" DIAMETER X 5" LONG HEX HEAD PER SAE J429 GRADE 2.

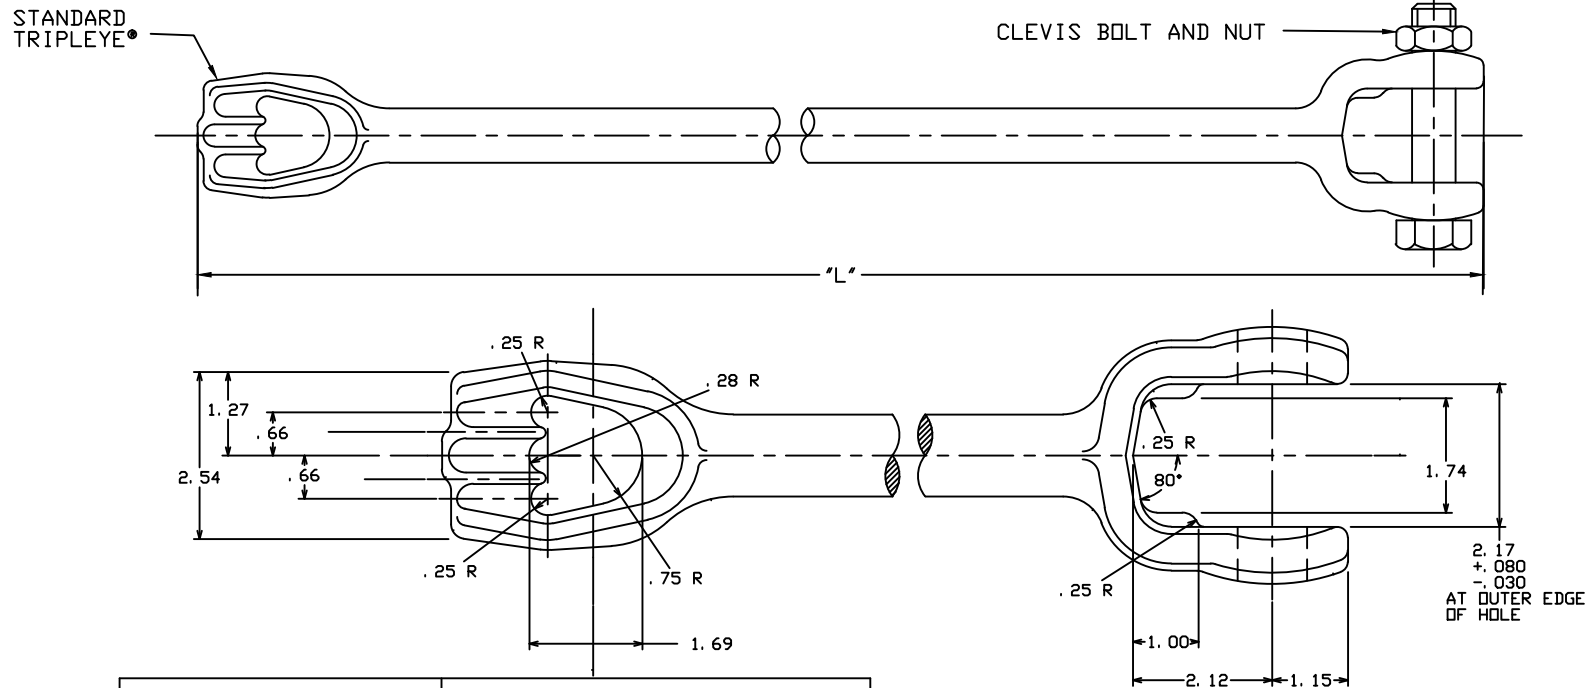

CAT. NO.	"L"
402	6'
4022	2'
PS4023	3'

CHANCE TOLERANCE CHART		 HUBBELL POWER SYSTEMS HUBBELL POWER SYSTEMS, INC.	
CONFIDENTIAL: THIS DRAWING AND ITS CONTENTS ARE CONFIDENTIAL AND THE EXCLUSIVE PROPERTY OF HUBBELL POWER SYSTEMS. NO PUBLICATION, DISTRIBUTION OR COPIES MAY BE MADE WITHOUT THE WRITTEN CONSENT OF HUBBELL POWER SYSTEMS. HUBBELL POWER SYSTEMS UNPUBLISHED ALL RIGHTS RESERVED UNDER THE COPYRIGHT LAWS.			
TITLE ROD, EXTENSION		CAT / PART / ASSY NO. SEE CHART	
SIZE B	DWG NO. SA402	DO NOT SCALE THIS DRAWING	DRN BY DVH DATE 2/5/07 SHEET 1 OF 1