


RELEASE HISTORY					PART# 41512-7001	
a	DRAWING/DESIGN CREATED Rev.0	26.02.2016 SNR			DRAWING NUMBER 4205A X	
b	DRAWING REDRAWN Rev.1	26.03.2021 RVS			TITLE STATION POST INSULATOR-110kV BIL	
			REF. TECHNICAL REFERENCE TR-225			

TECHNICAL CHARACTERISTICS

MECHANICAL RATINGS

CANTILEVER STRENGTH, lbs (kN) (Upright & Underhung)	4000 (17.8)
TENSION STRENGTH, lbs (kN)	20000 (89)
TORSION STRENGTH in-lbs (kN*M)	14000 (1.6)
COMPRESSION STRENGTH lbs (kN)	20000 (89)

ELECTRICAL RATINGS

IMPULSE WITHSTAND VOLTAGE, kV	110
CRITICAL IMPULSE FLASHOVER VOLTAGE, POSITIVE, kV	125
WET POWER FREQUENCY WITHSTAND VOLTAGE, kV	45



RADIO INFLUENCE VOLTAGE RATINGS

LOW FREQUENCY TEST VOLTAGE, kV	10
MAX. RIV AT 1000 kHz, μ V	50

PHYSICAL CHARACTERISTICS

MINIMUM LEAKAGE DISTANCE, in (mm)	15.5 (394)
UNIT HEIGHT, in (mm)	12 (305)
NET WEIGHT, lbs (kg)	40.5 (18.4)
GLAZE COLOR	Light Gray

APPLICABLE STANDARD:ANSI:C29.9 & IEC:60168,273

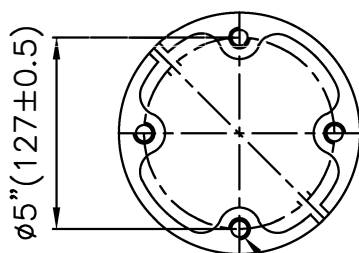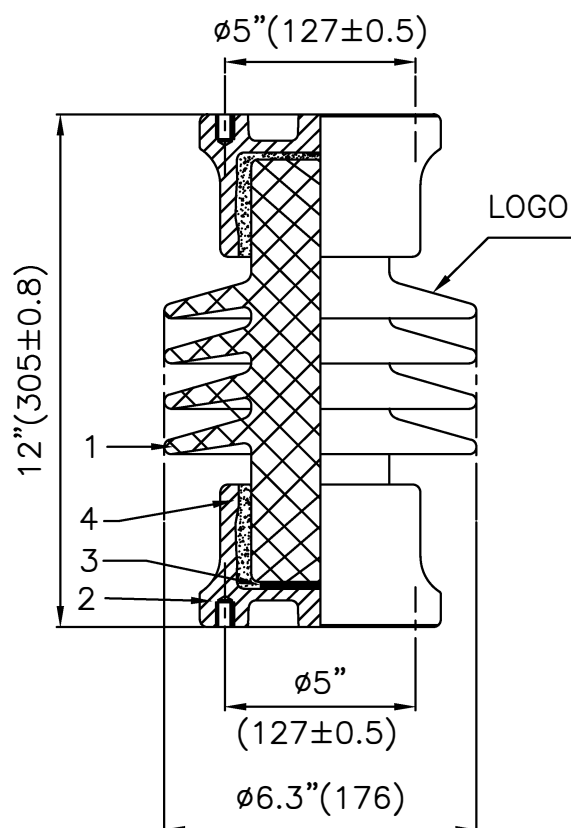

4 Holes 5/8"-11UNC(0.015" Oversize)
X 20mm deep on 5" PCD

4	Cushion	2--4	Asphalt felt
3	Cement		-
2	Cap	2	M.C.I.Hot-galvanized
1	Porcelain	1	Grey Glazed
S.No.	DESCRIPTION	QUANTITY	REMARKS

REF.	DWG.TYPE SALES	DWN. RVS	APP.
------	----------------	----------	------