


3M™ Cold Shrink QT-III Silicone Rubber Skirted and Inverted Skirted Termination Kits, 7640-S, 7650-S and 7660-S Series 5, 8, 15, 25/28 and 35 kV


Typical Properties, *continued*

Not for specifications. Values are typical, not to be considered minimum or maximum. Properties measured at room temperature 73°F (23°C) unless otherwise stated.


Typical Dimensions

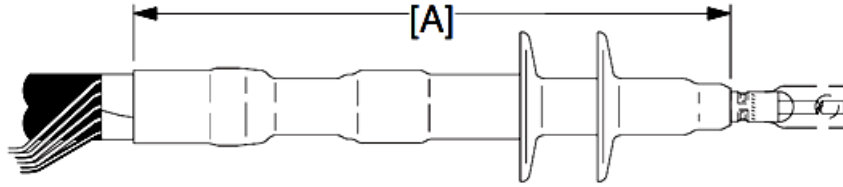

Kit Number	Dimension [A] Max.	Wet Creepage Distance Max.	Arcing distance Max.
7642-S-2	9.8" (249 mm)	13.3" (338 mm)	9.8" (249 mm)
7642-S-2 (L)	9.8" (249 mm)	13.3" (338 mm)	9.8" (249 mm)

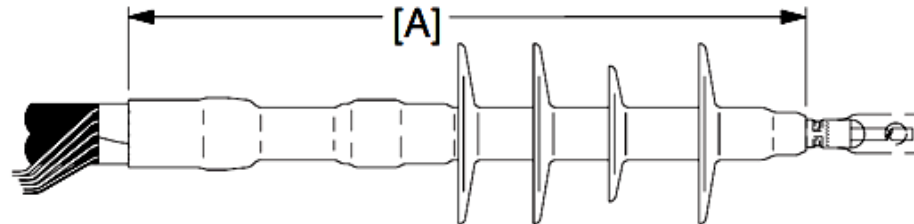

Kit Number	Dimension [A] Max.	Wet Creepage Distance Max.	Arcing distance Max.
7652-S-4	12.25" (311 mm)	18.5" (470 mm)	12.25" (311 mm)
7652-S-4 (L)	12.25" (311 mm)	18.5" (470 mm)	12.25" (311 mm)
7653-S-4	12.25" (311 mm)	18.5" (470 mm)	12.25" (311 mm)
7654-S-4	12.25" (311 mm)	18.5" (470 mm)	12.25" (311 mm)
7655-S-4	12.25" (311 mm)	18.5" (470 mm)	12.25" (311 mm)
7655-S-4 (L)	12.25" (311 mm)	18.5" (470 mm)	12.25" (311 mm)
7656-S-4	13.25" (337 mm)	19.5" (495 mm)	13.25" (337 mm)

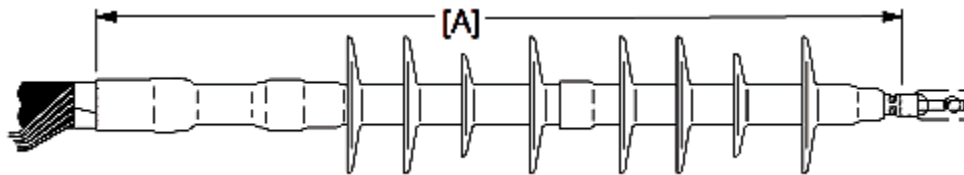

Kit Number	Dimension [A] Max.	Wet Creepage Distance Max.	Arcing distance Max.
7663-S-8	20.50" (521 mm)	33.00" (838 mm)	20.50" (521 mm)
7664-S-8	20.50" (521 mm)	33.00" (838 mm)	20.50" (521 mm)
7665-S-8	20.50" (521 mm)	33.00" (838 mm)	20.50" (521 mm)
7665-S-8 (L)	20.50" (521 mm)	33.00" (838 mm)	20.50" (521 mm)
7666-S-8	21.50" (546 mm)	34.00" (864 mm)	21.50" (546 mm)