
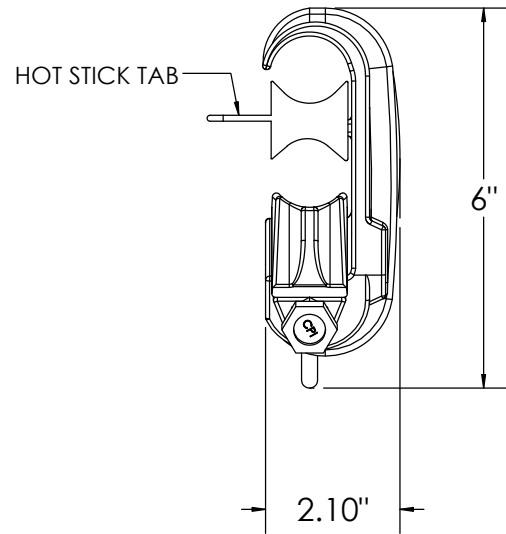


795 - 1272 AAC SERIES TAP CONNECTORS

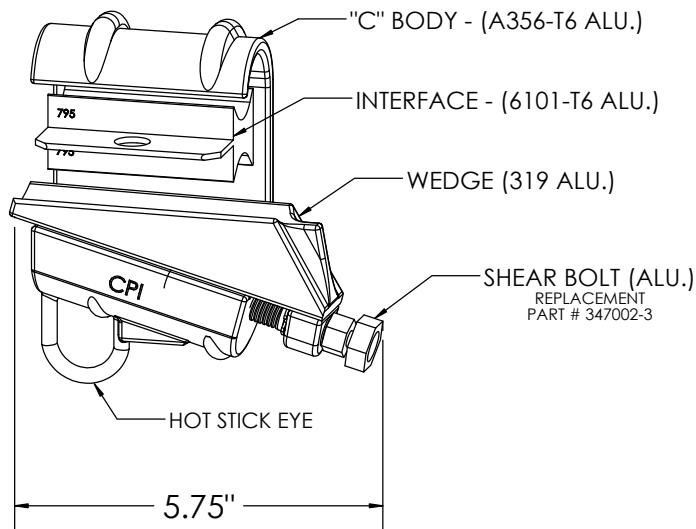

Main Conductor		Tap Conductor		Catalog #
Description	Dia. Range	Description	Dia. Range	
636 ACSR 715 750 MCM 795 900 MCM	.973" - 1.108"	#6, #4, #2 AAC	.162" - .292"	795454
		#2 ACSR, #1, 1/0, 2/0 AAC	.316" - .414"	795360
		2/0 ACSR, 3/0, 4/0, 250 AAC	.447" - .574"	795218
		266.8, 300 MCM, 350 MCM, 336.4 ACSR 18/1	.586" - .684"	795050
		336.4 ACSR 26/7, 450 MCM, 500 MCM, 477, 556.5 AAC	.720" - .858"	795920
		477 ACSR 30/7, 556.5 ACSR, 600 MCM, 605 MCM, 636 ACSR 18/1, 715.5 AAC	.879" - .975"	795730
		636 ACSR 26/7, 750 MCM, 715, 795, 900 MCM	.991" - 1.108"	795594
954 900 ACSR 1000 MCM 1113 AAC 1033.5 AAC	1.124" - 1.196"	#6, #4, #2 AAC	.162" - .292"	954420
		#2 ACSR, #1, 1/0, 2/0 AAC	.316" - .414"	954320
		2/0 ACSR, 3/0, 4/0, 250 AAC	.447" - .574"	954175
		266.8, 300 MCM, 350 MCM, 366.4 ACSR 18/1	.586" - .684"	954030
		366.4 ACSR 26/7, 450 MCM, 397.5, 477, 500 MCM, 556.5 AAC	.720" - .856"	954870
		477 ACSR 26/7, 556, 605, 715 AAC, 636 ACSR 26/7	.858" - .991"	954660
		666.6 ACSR 24/7, 715 ACSR, 795, 900 AAC	1.000" - 1.093"	954484
1033.5 ACSR 1113 ACSR 1192 AAC 1272 AAC	1.212" - 1.300"	795 ACSR 26/7, 954, 1113 MCM, 900 ACSR, 1000 MCM, 1033.5 AAC	1.107" - 1.196"	954390
		#6, #4, #2 AAC	.162" - .292"	103370
		#2 ACSR, #1, 1/0, 2/0 ACC	.316" - .414"	103260
		2/0 ACSR, 3/0, 4/0 AAC	.447" - .522"	103110
		4/0 ACSR, 250 MCM, 266.8, 300 MCM	.563" - .642"	103945
		350 MCM, 336.4, 397.5, 450 MCM	.665" - .783"	103780
		397.5 ACSR 30/7, 477, 500 MCM, 556 AAC, 600 MCM	.795" - .893"	119793
		556.5 ACSR 24/7, 636, 715 ACSR 24/7, 750 MCM, 795 AAC	.914" - 1.036"	103680
		795 ACSR 36/1, 900, 954 AAC, 1000 AAC, , 1113 MCM	1.040" - 1.151"	103580
		900 ACSR 45/7, 1033.5, 954 ACSR, 1192.5 AAC	1.162" - 1.258"	103380
		1113 ACSR, 1272 AAC	1.212" - 1.300"	119250

STANDARD PACKAGE: Full Carton: 20 Units: 11" x 11" x 11.5" Box: 36 Lbs. Half Carton: 10 Units: 11" x 11" x 7" Box: 18 Lbs.