



3/4-10 UFS-2B TAPPED HOLE
PER ANSI C29.7

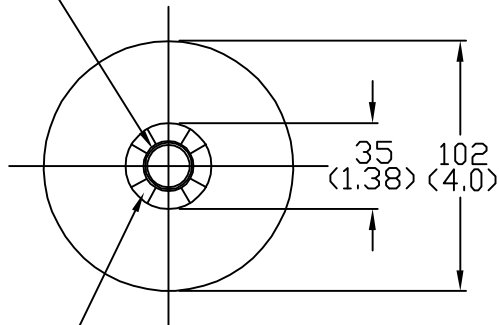

CAST IN SERRATED LOCKING
PAD PER ANSI C29.7

VIEW A-A
2X SCALE

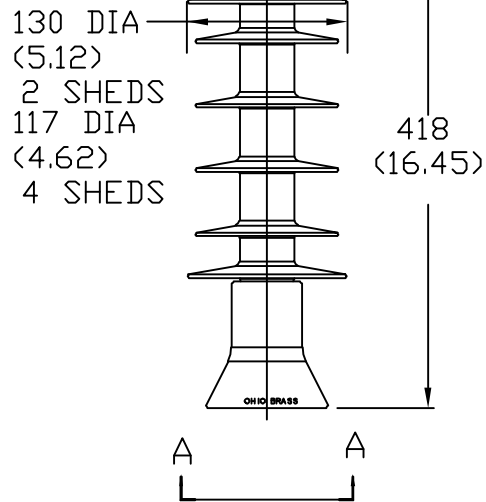

DRY ARCING DISTANCE	297 MM (11.7 IN)
LEAKAGE DISTANCE	662 MM (26.1 IN)
60 Hz DRY FLASHOVER	135 kV
60 Hz WET FLASHOVER	100 kV
IMPULSE POS. CRITICAL FLASHOVER	215 kV
IMPULSE POS. WITHSTAND	200 kV
SCL	12.5 kN (2800 LB.)
RCL	5.5 kN (1235 LB.)
NET WEIGHT	3.6 KG (7.9 LB.)

~~OHIO BRASS~~
TOLERANCE CHART

CONFIDENTIAL: THIS DRAWING AND ITS
CONTENTS ARE CONFIDENTIAL AND THE
EXCLUSIVE PROPERTY OF HUBBELL
POWER SYSTEMS. NO PUBLICATION,
DISTRIBUTION OR COPIES MAY BE MADE
WITHOUT THE WRITTEN CONSENT OF
HUBBELL POWER SYSTEMS.
HUBBELL POWER SYSTEMS UNPUBLISHED
ALL RIGHTS RESERVED UNDER THE
COPYRIGHT LAWS.



HUBBELL® POWER SYSTEMS

TITLE
VERI LITE
35 KV LINE POST

SIZE S	DWG NO. --	CAT / PART / ASSY NO. 80S028-0F09	REV 3
-----------	---------------	--------------------------------------	----------

REV DATE 08/21/07	DO NOT SCALE THIS DRAWING	DRN BY JVR	DATE 08/31/05	SHEET 1 OF 1
----------------------	------------------------------	------------	---------------	--------------