


MANUFACTURER'S
IDENTIFICATION

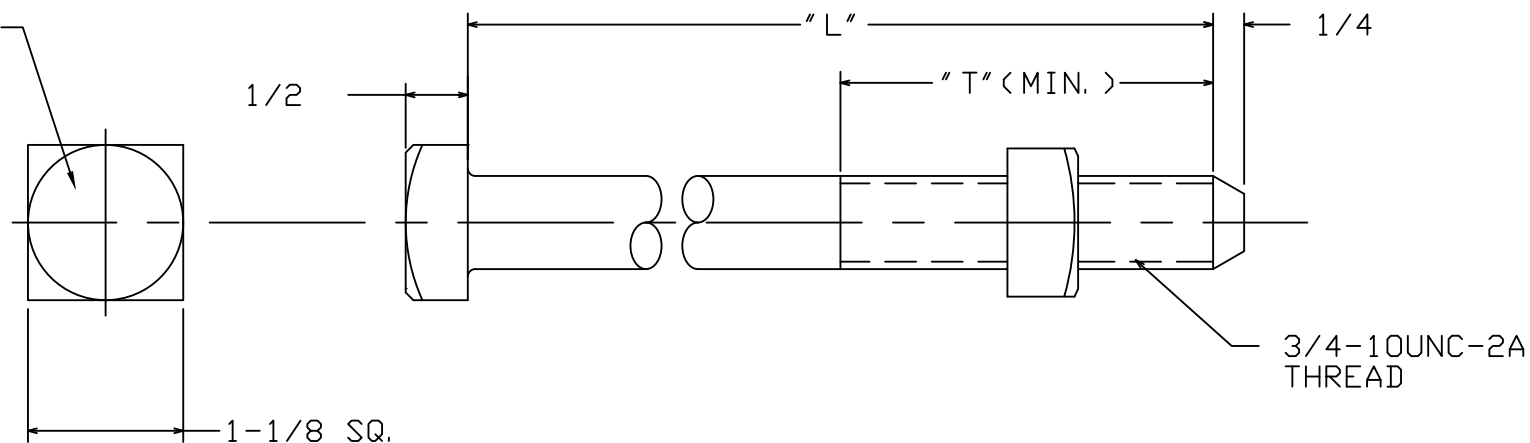

CATALOG NUMBER	USA PART NUMBER	"L"	"T"
PS8902		2	1.75
PS8903		3	1.75
PS8906		6	4
DF4B7		7	4
8908	8908USA	8	4
8910	8910USA	10	6
8912	8912USA	12	6
8914	8914USA	14	6
8916	8916USA	16	6
8918	8918USA	18	6
8920	8920USA	20	6
8922		22	6
8924		24	6
8926		26	6
8928		28	6
8930		30	8
8932		32	8
PS8934		34	8
PS8936		36	8

==NOTES==

1. MATERIAL: STEEL, HOT DIP GALVANIZE PER ASTM A153 (LATEST REV).
2. BOLTS ARE IN COMPLIANCE WITH THE REQUIREMENTS OF ANSI C135.1 AND HAVE A TENSILE STRENGTH OF 18,350 LBS.
3. CATALOG NUMBERS WITH A "USA" SUFFIX HAVE ALL COMPONENTS MELTED/MANUFACTURED IN THE USA.

CHANCE TOLERANCE CHART EC 75560		 HUBBELL POWER SYSTEMS	
CONFIDENTIAL: THIS DRAWING AND ITS CONTENTS ARE CONFIDENTIAL AND THE EXCLUSIVE PROPERTY OF HUBBELL POWER SYSTEMS. NO PUBLICATION, DISTRIBUTION OR COPIES MAY BE MADE WITHOUT THE WRITTEN CONSENT OF HUBBELL POWER SYSTEMS. HUBBELL POWER SYSTEMS UNPUBLISHED ALL RIGHTS RESERVED UNDER THE COPYRIGHT LAWS.		TITLE 3/4 MACHINE OR CROSSARM BOLT	
SIZE SB SA8908	DWG NO. 	CAT / PART / ASSY NO. SEE CHART	REV F
DO NOT SCALE THIS DRAWING	DRN BY MRG	DATE 10/26/18	SHEET 01 OF 01