

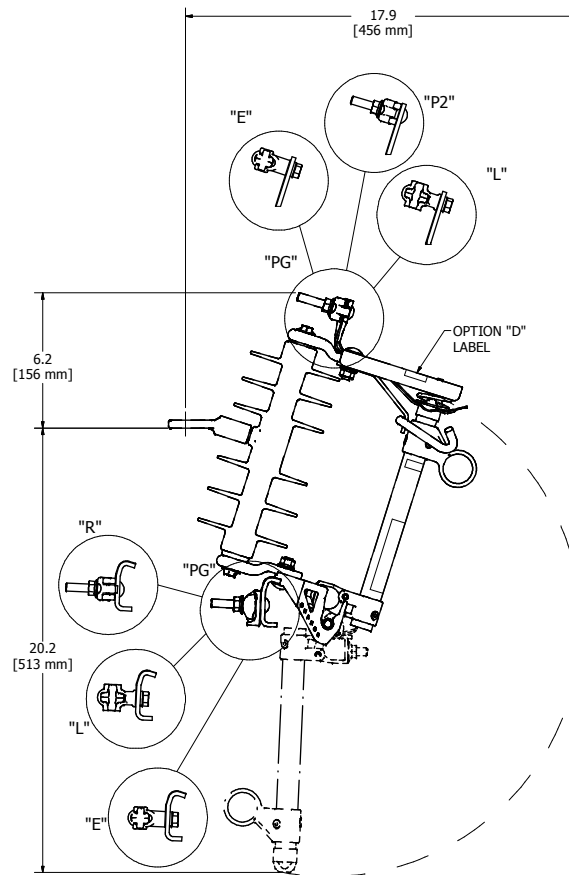
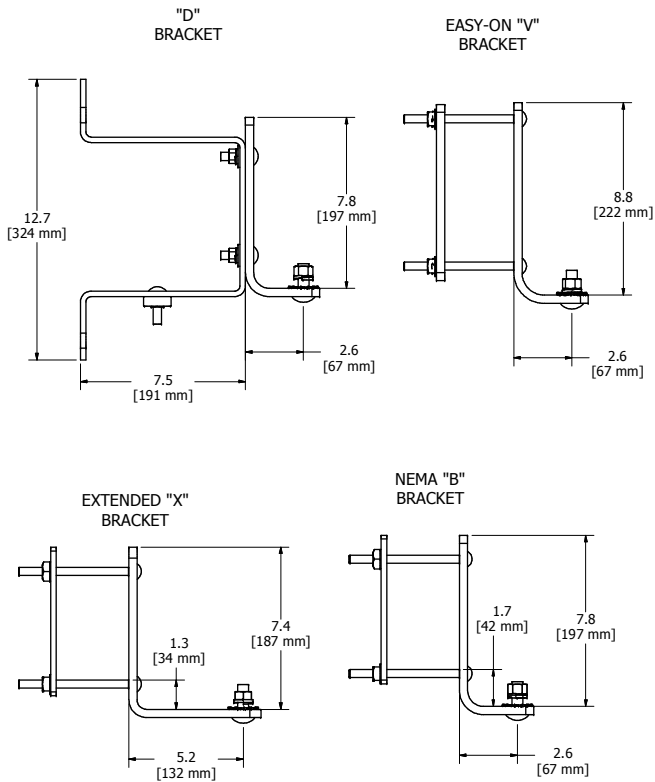

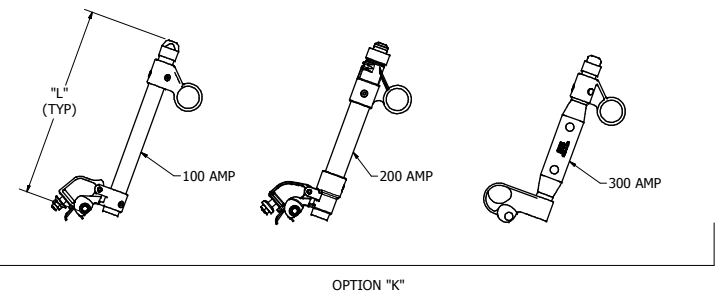


POSITION 7 & 8 FUSE HOLDER					
POSITION 7 & 8	KV MAX	AMPS	AIC ASYM	"L"	ARC ROD
12	15	100	10,000	11.50 (292 MM)	NONE
14	15	100	16,000	11.59 (294 MM)	4.00 (102 MM)
43	15	200	12,000	11.59 (294 MM)	3.50 (89 MM)
33	15	300	12,000	11.59 (294 MM)	NONE
MM	15	-	-	-	-

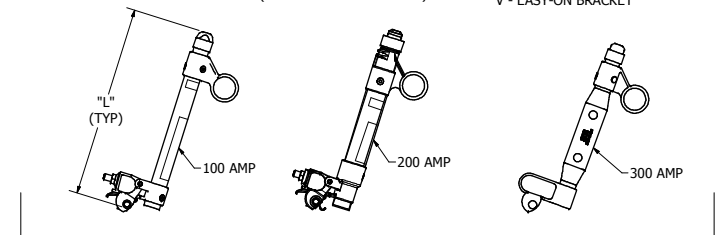

DIMENSION ARE APPROXIMATE
AND FOR REFERENCE ONLY

CATALOG NUMBERING SYSTEM

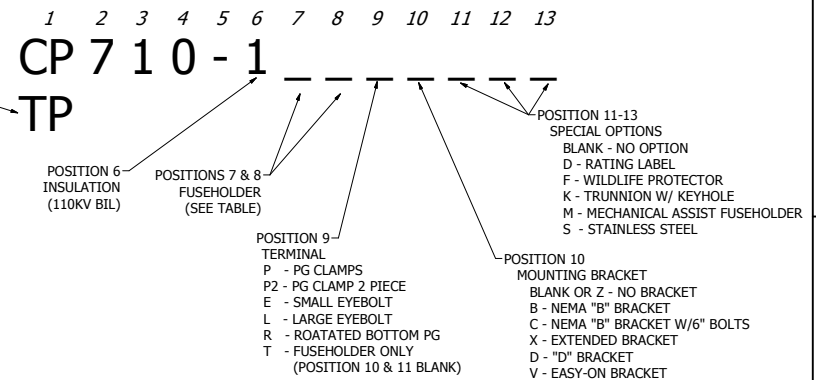

ASSIST SPRING TYPICAL
FOR 100 & 200 AMP
FUSEHOLDERS

CHANCE. EC: 70151 SR 06-21-17		HUBBELL POWER SYSTEMS, INC.		HUBBELL POWER SYSTEMS	
CONFIDENTIAL: THIS DRAWING AND ITS CONTACTS ARE CONFIDENTIAL AND THE EXCLUSIVE PROPERTY OF HUBBELL POWER SYSTEMS. NO PUBLICATION, DISTRIBUTION OR COPIES MAY BE MADE WITHOUT THE WRITTEN CONSENT OF HUBBELL POWER SYSTEMS. HUBBELL POWER SYSTEMS UNPUBLISHED ALL RIGHTS RESERVED UNDER THE COPYRIGHT LAWS.		TITLE CUTOUT, 15KV 110 BIL POLYMER		REV E	
SIZE D	DWG NO. SAP710-1	CAT / PART / ASSY NO. SEE CHART		DO NOT SCALE THIS DRAWING	
DRN BY COCHRAN		DATE 08-21-13		SHEET 01 OF 01	