


Subject: Distribution Grip Dead-end for AWAC Alumoweld-Aluminum Conductors

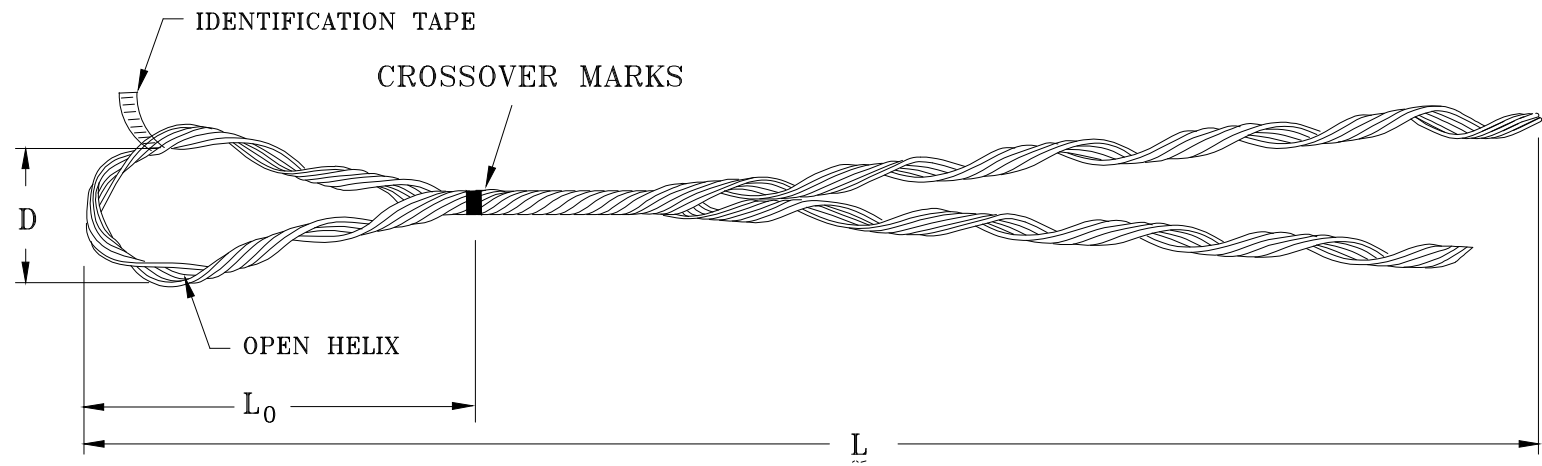

Catalog Number	DG-4563
Conductor Size	#1 AWAC 5/2 #2 AWAC 3/4 #3 AWAC 2/5
Conductor Dia. (in.)	0.370 0.366 0.362
Conductor Outside Dia (in.)	0.370 0.386 0.382
Color Code	Green
Rod Material	Aluminum Clad Steel
Rod End Treatment	Deburred
Approx. Overall	32"
Approx. Loop Length (Lo)	8-1/2"
Approx. Loop Dia. (D)	2-1/4"
Loop Configuration	Open Helix
Lay Direction	RHL

- NOTE:**
- 1) Rated Holding Strength (lbs.)
 - a) #1AWAC 5/2: 5450
 - b) #2 AWAC 3/4: 9690
 - c) #3 AWAC 2/5: 11300
 - 2) Lay Direction of Rods must match the Lay Direction of the conductor

ALL DIMENSIONS ARE APPROXIMATE AND MAY VARY PER FACTORY TOLERANCES. CONTACT PLP FOR MORE INFORMATION



CLEVELAND, OHIO 44143
+1 440 461 5200
PLP.COM

CONFIDENTIAL
The data and information contained in this document are proprietary to PLP (Preformed Line Products). Such data and information are provided solely for use with PLP's products and shall not be disclosed, duplicated, or otherwise used without the express written approval of PLP.
PLP MAINTAINS THE RIGHT TO CHANGE DRAWING SPECIFICATIONS AT ANY TIME. PLEASE CONTACT PLP TO VERIFY CURRENT VERSION

DESCRIPTION: DG-4563 Distribution Grip Dead-End for AWAC Alumoweld-Aluminum Conductors				
DRN BY:AMB	APR BY:MRB	DATE:03/24/2026	SCALE: NTS	PAGE 1 OF 1
FILENAME:		2009527		