



Fuse Link Type QI

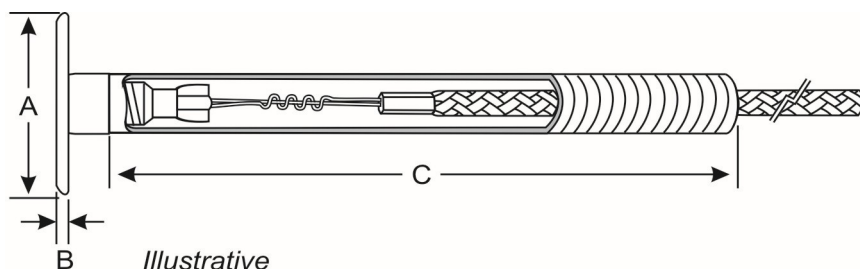

1. Application	Products for Electric Energy Protection	
2. Standard	ANSI C37-41; ANSI C37-42	
3. Nominal current	1A; 2A; 3A; 5A; 7A; 10A; 15A; 20A; 25A; 30A; 40A; 50A	
4. Type and speed	QI	
5. Voltage rate	11kV/38kV	
6. Head	Diameter (A)	19,0 ± 0,3 mm
	Thickness (B)	Min. 2,0 mm / Max. 4,0 mm
	Material	Silver plated copper
	Type	Removable
7. Protector tube	Length (C)	142,0 ± 1,0 mm
	Material	Vulcanized fiber reinforced with fiberglass
8. Flexible cable	Diameter	Maximum 5,0 mm
	Material	Tinned copper wires
9. Overall length	585 mm (23")	
10. Quality	Quality management system certified	ISO 9001:2015 SGS Certification
	Breaking capacity essays	CEPEL/POWERTECH
	Standard type essays	INDEL laboratories
	Standard routine essays	INDEL laboratories
11. Packing	Individual	Paper box
	Collective	Carton box


Fuse Link Type QI

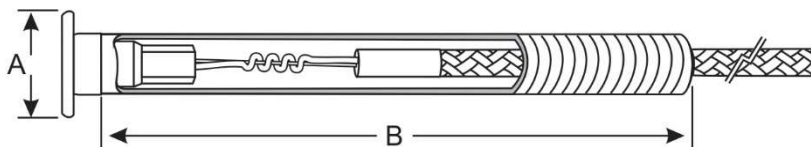

Illustrative

1. Application	Products for Electric Energy Protection	
2. Standard	ANSI C37-41; ANSI C37-42	
3. Nominal current	60A; 75A; 100A	
4. Type and speed	QI	
5. Voltage rate	11kV/38kV	
6. Head	Diameter (A)	19,0 ± 0,3 mm
	Thickness	4,0 mm maximum
	Material	Silver plated copper
	Type	Removable
7. Protective Tube	Length (B)	142,0 ± 1,0 mm
	Material	Vulcanized fiber reinforced with fiberglass
8. Flexible cable	Diameter	Maximum 8,0 mm
	Material	Tinned copper wires
9. Overall length	585 mm (23")	
10. Quality	Quality management system certified	ISO 9001:2015 SGS Certification
	Breaking capacity essays	CEPEL/POWERTECH
	Standard type essays	INDEL laboratories
	Standard routine essays	INDEL laboratories
11. Packing	Individual	Paper box
	Collective	Carton box

Fuse Link Type QI 11kV / 38kV

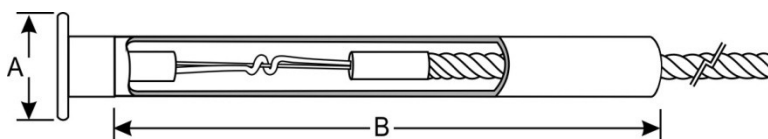

Illustrative

1. Application	Products for Electric Energy Protection	
2. Standard	ANSI C37-41; ANSI C37-42	
3. Nominal current	125A; 150A; 175A; 200A	
4. Type and speed	QI	
5. Voltage rate	11kV/38kV	
6. Head	Diameter (A)	25,0 ± 0,4 mm
	Thickness	4,0 mm maximum
	Material	Silver plated copper
	Type	Removable
7. Protective tube – Not necessary	Length (B)	142,0 ± 1,0 mm
	Material	Vulcanized fiber reinforced with fiberglass
8. Flexible cable	Diameter	Maximum 9,5 mm
	Material	Tinned copper wires
9. Overall length	585 mm (23")	
10. Quality	Quality management system certified	ISO 9001:2015 SGS Certification
	Standard type essays	INDEL laboratories
	Standard routine essays	INDEL laboratories
11. Packing	Individual	Paper box
	Collective	Carton box