

4




3


2

1


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	1	NEW DRAWING	02MAR222	GSK	RS

PART NUMBER	DESCRIPTION
EN2949-000	CSJU-2511
EN2950-000	CSJU-1511-SB2
EN2951-000	CSJU-1511-SB1
EN2952-000	CSJU-2511-SB1
EN2953-000	CSJU-2511-SB2
EN2968-000	CSJU-S-1511-SB2
EN2969-000	CSJU-S-1511-SB1
EN2970-000	CSJU-S-2511-SB1
EN2975-000	CSJU-S-2511-SB2
EN2976-000	CSJU-S-2511
EN5196-000	CSJU-1511-ALC2
EN5315-000	CSJU-2511-ALC2
EN6509-000	CSJU-1511-SB2-GC2

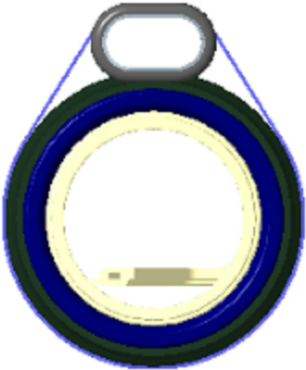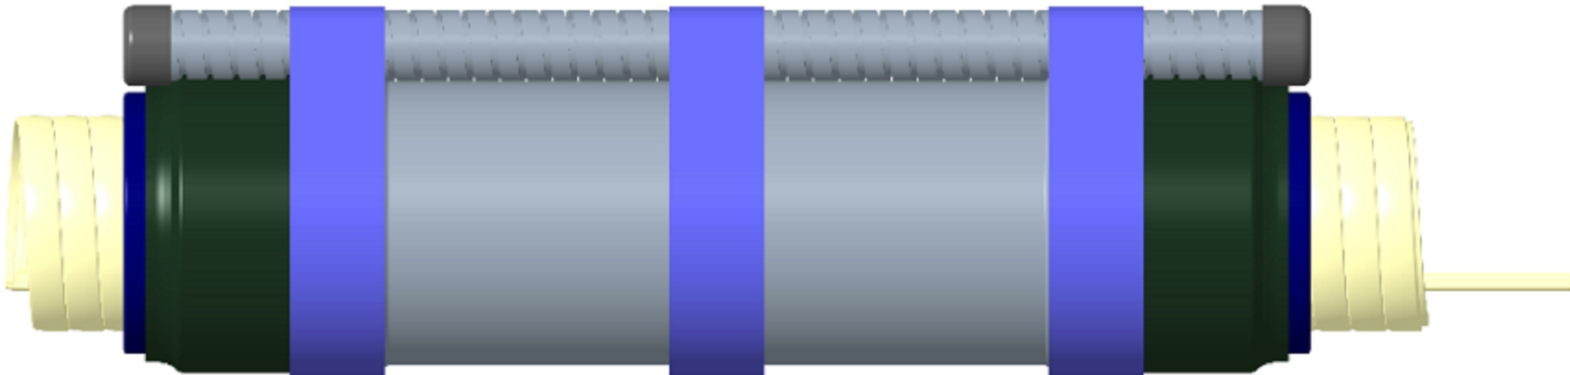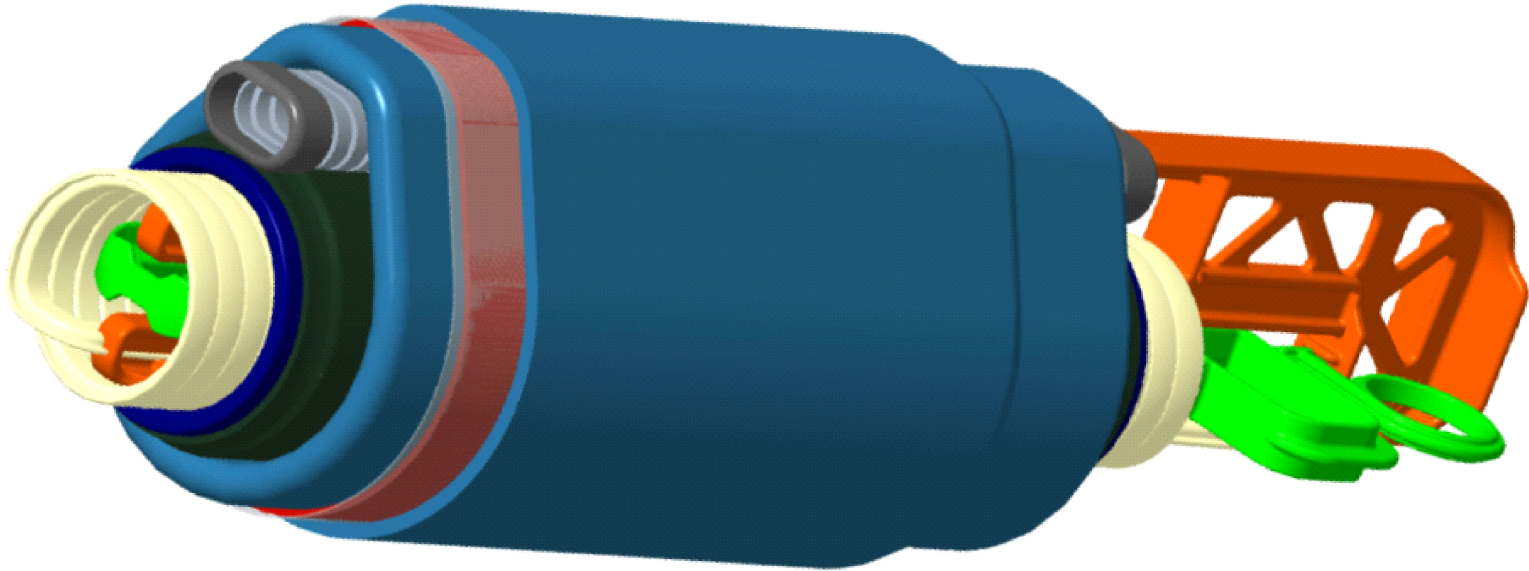

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 02MAR2022 SATHISH KUMAR G	 TE Connectivity Ltd.		
		CHK 02MAR2022 RAMÓN SÁNCHEZ			
DIMENSIONS: INCHES [mm]		TOLERANCES UNLESS OTHERWISE SPECIFIED:	NAME CSJU Cold Applied Joint CSJU-FINAL ASSEMBLY (SIZE: 12 mm)		
		0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± - 4 PLC ± - ANGLES ± -			
MATERIAL	FINISH	PRODUCT SPEC — APPLICATION SPEC — WEIGHT	SIZE A3	CAGE CODE 00779	DRAWING NO C-0147-CSJU
CUSTOMER DRAWING			SCALE NTS	SHEET 1 of 3	REV 1

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	—	SEE SHEET 1	—	—	—

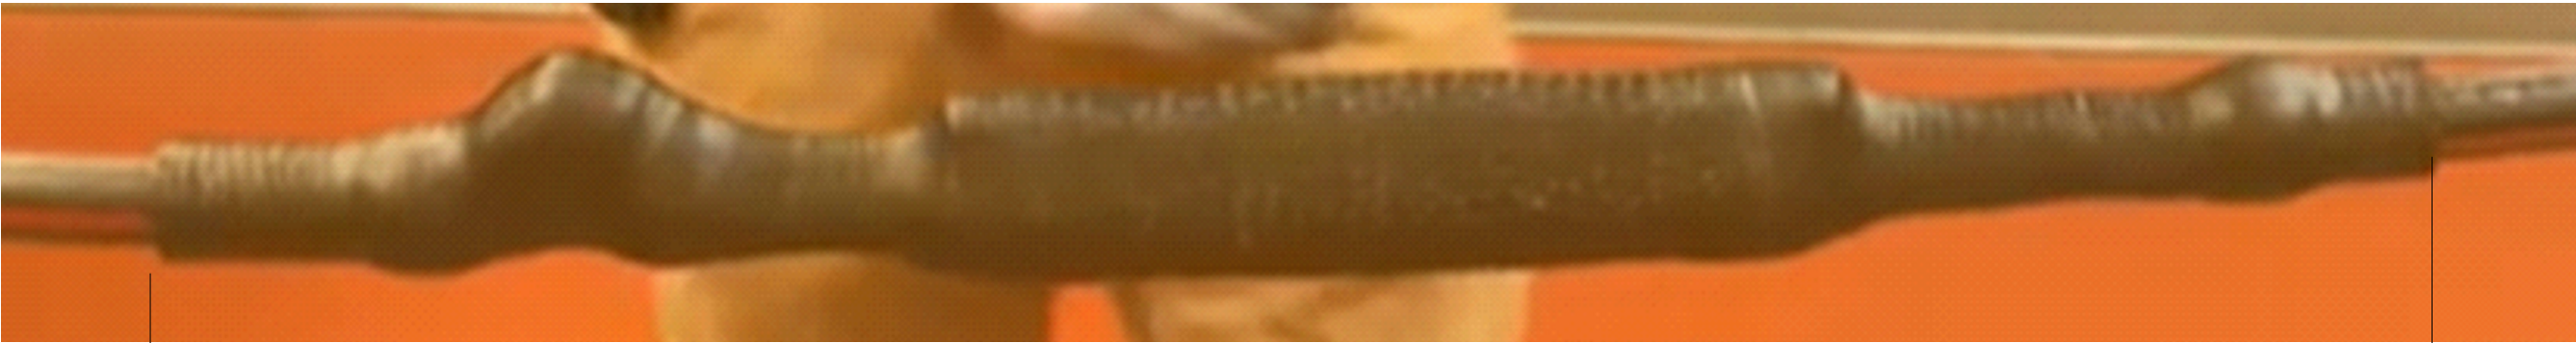

INSTALLATION LENGTH
22.44 [570]

CSJU splice is complete.



INSTALLATION LENGTH
22.44 [570]

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 02MAR2022 SATHISH KUMAR G	TE Connectivity Ltd.		
		CHK 02MAR2022 RAMÓN SÁNCHEZ			
		APVD 02MAR2022 RAMÓN SÁNCHEZ	NAME CSJU Cold Applied Joint CSJU—FINAL ASSEMBLY (SIZE: 12 mm)		
		PRODUCT SPEC —			
		APPLICATION SPEC —	SIZE A3		
		WEIGHT —			
		CUSTOMER DRAWING	SCALE NTS		
			SHEET 2 of 3		
			REV 1		

P	LTR	DESCRIPTION	DATE	DWN	APVD
	—	SEE SHEET 1	—	—	—

Selection information: Dimensions in inches (millimeters)


CSJU WITHOUT CONNECTOR						
Voltage Class	Catalog Number	Nominal Cable Range	Min - Max Insulation Diameter	Max. Jacket O.D.	Connector Dimensions	
					Max. O.D.	Max. Length
15 kV	CSJU-1511	#2 - 4/0	0.64 - 0.99 (16.3 - 25.1)	1.26 (32.0)	1.00 (25.4)	3.25 (82.5)
25 kV	CSJU-2511	#1 - 2/0	0.84 - 1.03 (21.3 - 26.2)	1.26 (32.0)	1.00 (25.4)	3.25 (82.5)

CSJU WITH ALUMINUM SHEAR BOLT CONNECTOR				
Voltage Class	Catalog Number	Nominal Cable Range	Min - Max Insulation Diameter	Max. Jacket O.D.
15 kV	CSJU-1511-SB1	#2 - 1/0	0.64 - 0.99 (16.3 - 25.1)	1.26 (32.0)
15 kV	CSJU-1511-SB2	#2 - 4/0	0.64 - 0.99 (16.3 - 25.1)	1.26 (32.0)
25 kV	CSJU-2511-SB1	#1 - 1/0	0.84 - 1.03 (21.3 - 26.2)	1.26 (32.0)
25 kV	CSJU-2511-SB2	#1 - 2/0	0.84 - 1.03 (21.3 - 26.2)	1.26 (32.0)

CSJU WITH ALUMINUM COMPRESSION CONNECTOR				
Voltage Class	Catalog Number	Nominal Cable Range	Min - Max Insulation Diameter	Max. Jacket O.D.
15 kV	CSJU-1511-ALC0	#2 STR-SOL, #1 SOL	0.64 - 0.99 (16.3 - 25.1)	1.26 (32.0)
15 kV	CSJU-1511-ALC1	#1 STR-CPT, 1/0 CPT-SOL	0.64 - 0.99 (16.3 - 25.1)	1.26 (32.0)
15 kV	CSJU-1511-ALC2	1/0 STR-CMPR, 2/0 CPT	0.64 - 0.99 (16.3 - 25.1)	1.26 (32.0)
15 kV	CSJU-1511-ALC3	2/0-STR-CMPR, 3/0 CPT	0.64 - 0.99 (16.3 - 25.1)	1.26 (32.0)
15 kV	CSJU-1511-ALC4	3/0 STR-CMPR, 4/0 CPT	0.64 - 0.99 (16.3 - 25.1)	1.26 (32.0)
15 kV	CSJU-1511-ALC5	4/0 STR-CMPR	0.64 - 0.99 (16.3 - 25.1)	1.26 (32.0)
25 kV	CSJU-2511-ALC0	#2 STR-SOL, #1 SOL	0.84 - 1.03 (21.3 - 26.2)	1.26 (32.0)
25 kV	CSJU-2511-ALC1	#1 STR-CPT, 1/0 CPT-SOL	0.84 - 1.03 (21.3 - 26.2)	1.26 (32.0)
25 kV	CSJU-2511-ALC2	1/0 STR-CMPR, 2/0 CPT	0.84 - 1.03 (21.3 - 26.2)	1.26 (32.0)
25 kV	CSJU-2511-ALC3	2/0-STR-CMPR, 3/0 CPT	0.84 - 1.03 (21.3 - 26.2)	1.26 (32.0)

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
INCHES [mm]



TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ± —
1 PLC ± —
2 PLC ± —
3 PLC ± —
4 PLC ± —
ANGLES ± —

MATERIAL —

FINISH —

DWN 02MAR2022
SATHISH KUMAR G
CHK 02MAR2022
RAMÓN SÁNCHEZ
APVD 02MAR2022
RAMÓN SÁNCHEZ
PRODUCT SPEC —
APPLICATION SPEC —
WEIGHT —

 TE Connectivity Ltd.

NAME
CSJU Cold Applied Joint
CSJU—FINAL ASSEMBLY (SIZE: 12 mm)

SIZE
A3

CAGE CODE
00779

DRAWING NO
C-0147—CSJU

RESTRICTED TO
—

CUSTOMER DRAWING

SCALE
NTS

SHEET
3 of 3

REV
1

1470—19 (1/15)