



FIBERGLASS EQUIPMENT MOUNTS

Single Phase/Single Position 0° Mount



Material Specifications

Pole Gain


- 65-45-12 Ductile Iron, hot-dipped galvanized per ASTM A153 (6" to 8" mounting centers)
- Accepts 5/8" pole mounting hardware
- Can be banded using the Aluma-Form Bolt-A-Band banding system

End Fitting

- 65-45-12 Ductile Iron, hot-dipped galvanized per ASTM A153

Fiberglass Rod

- 1-1/2" diameter Super-Smooth, proprietary veiled gray polyester rod with added ultraviolet protection

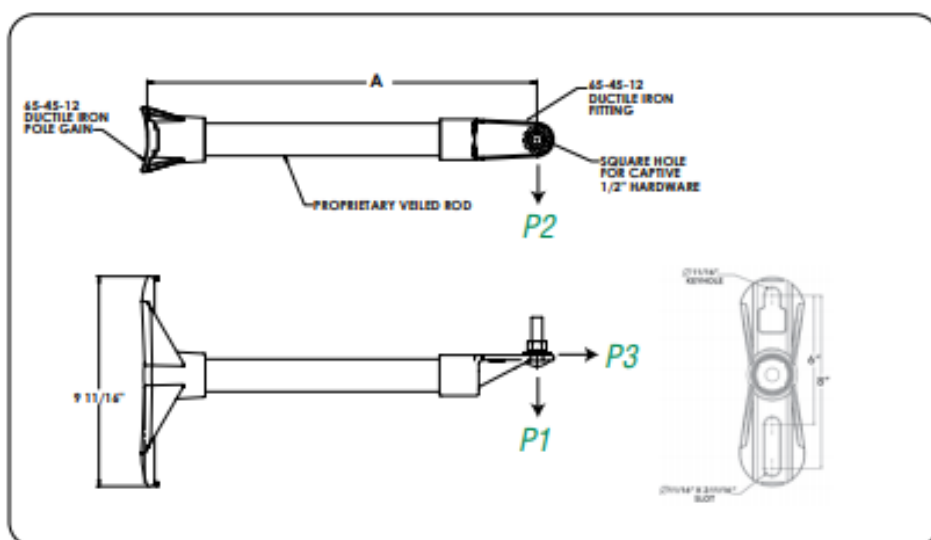

Spacer Bar Option



Cat# Suffix	Cat # to Order Separately W/O Hardware	Cat # to Order Separately w/ Hardware	Hole Center Spacing
T8	S1-BAR-T8	S1-BAR-T8-H	8"
T10	S1-BAR-T10	S1-BAR-T10-H	10"
T12	S1-BAR-T12	S1-BAR-T12-H	12"

Catalog Name	Rod Diameter	Standoff Length, A ¹	Spacer Bar Hole Center Spacing	Hardware ²	Ultimate Load			Weight
					P1 (lbs)	P2 (lbs)	P3 (lbs)	
F1CA-MV-H12-S1	1-1/2"	12"	---	No	1,800	1,400	5,000	5.4 lbs.
F1CA-MV-H15-S1	1-1/2"	15"	---	No	1,500	1,150	5,000	5.7 lbs.
F1CA-MV-H18-S1	1-1/2"	18"	---	No	1,200	900	5,000	6.1 lbs.
F1CA-MV-H24-S1	1-1/2"	24"	---	No	900	700	5,000	6.9 lbs.
F1CA-MV-H12-S1-H	1-1/2"	12"	---	Yes	1,800	1,400	5,000	5.6 lbs.
F1CA-MV-H15-S1-H	1-1/2"	15"	---	Yes	1,500	1,150	5,000	6.0 lbs.
F1CA-MV-H18-S1-H	1-1/2"	18"	---	Yes	1,200	900	5,000	6.3 lbs.
F1CA-MV-H18-S1-HT10	1-1/2"	18"	10"	Yes	1,200	900	5,000	7.6 lbs.
F1CA-MV-H24-S1-H	1-1/2"	24"	---	Yes	900	700	5,000	7.1 lbs.

Notes:

1. Custom lengths available, contact factory or local sales representative.

2. Standard hardware includes captive 1/2" x 2" carriage bolt, 1/2" hex nut, 1/2" lock washer, & 1/2" star washer.