

2" Conductor Supports

Horizontal Pin

Material Specifications

Pole Gain



- 65-45-12 Ductile Iron, hot-dipped galvanized per ASTM A153 (8" t& 10" mounting centers)
- Back-to-back & Jump proof pole gain options
- Accepts 5/8" pole mounting hardware
- Can be banded using the Aluma-Form Bolt-A-Band banding system

End Fitting

- 65-45-12 Ductile Iron, hot-dipped galvanized per ASTM A153 with Nylon Threads

Fiberglass Rod

- 2" diameter Super-Smooth, veiled gray polyester rod with added ultraviolet protection

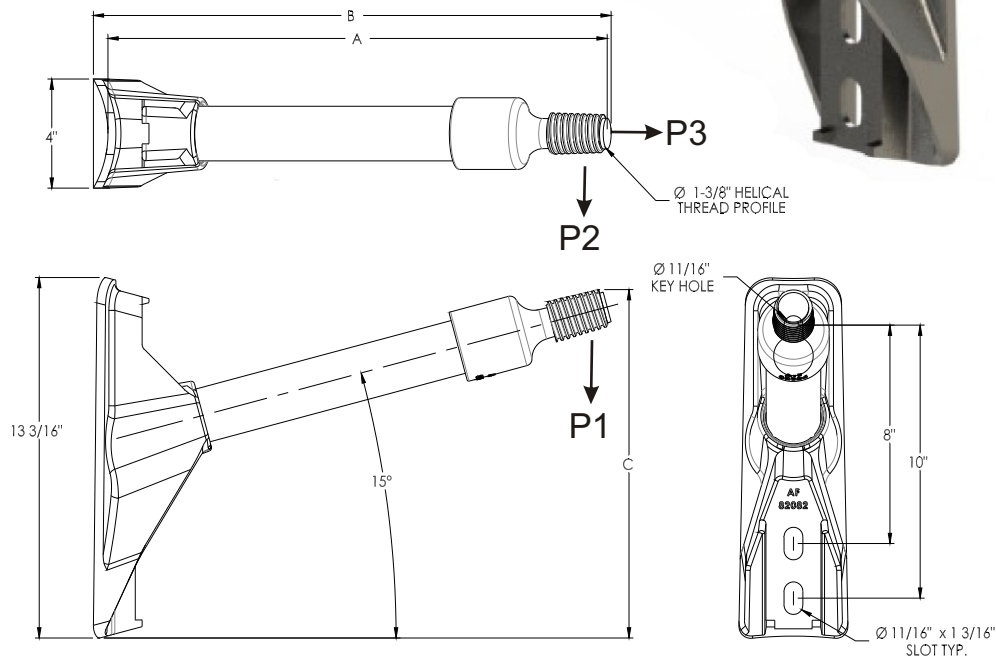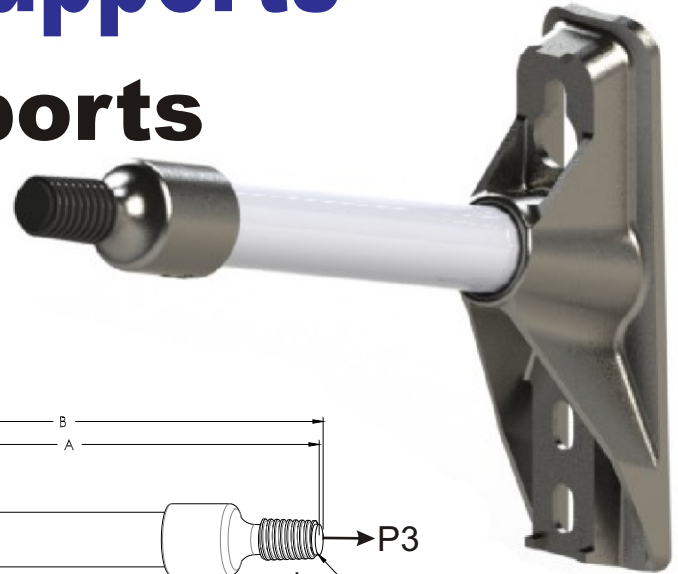

Conductor Supports - Horizontal Pin								
Catalog Number	A	B	C	Nylon Pin Diameter	Min Ultimate Load (lbs) P1 Vert	Min Ultimate Load (lbs) P2 Long	Min Ultimate Load (lbs) P3 Trans	Weight Ea (lbs)
1" Nylon Threads								
F1CS-HV-A18-JHP-1	18	18 3/4	12-11/16	1"	2000	1500	1500	13.5
F1CS-HV-A21-JHP-1	21	21 3/4	13-1/2	1"	1875	1350	1500	13.8
F1CS-HV-A24-JHP-1	24	24 3/4	14-5/16	1"	1750	1200	1500	14.2
F1CS-HV-A18-BHP-1	18	18 3/4	12-11/16	1"	2000	1500	1500	13.5
F1CS-HV-A21-BHP-1	21	21 3/4	13-1/2	1"	1875	1350	1500	13.8
F1CS-HV-A24-BHP-1	24	24 3/4	14-5/16	1"	1750	1200	1500	14.2
1-3/8" Nylon Threads								
F1CS-HV-A18-JHP-2	18	18 3/4	12-11/16	1"-3/8	2000	1500	1500	13.5
F1CS-HV-A21-JHP-2	21	21 3/4	13-1/2	1"-3/8	1875	1350	1500	13.8
F1CS-HV-A24-JHP-2	24	24 3/4	14-5/16	1"-3/8	1750	1200	1500	14.2
F1CS-HV-A18-BHP-2	18	18 3/4	12-11/16	1"-3/8	2000	1500	1500	13.5
F1CS-HV-A21-BHP-2	21	21 3/4	13-1/2	1"-3/8	1875	1350	1500	13.8
F1CS-HV-A24-BHP-2	24	24 3/4	14-5/16	1"-3/8	1750	1200	1500	14.2

Notes:

1. Custom lengths available, contact factory or local sales representative.
2. Silicone Coating - contact factory or local sales representative