



# FIBERGLASS EQUIPMENT MOUNTS

## Three Phase/Double Position 0° Mount

### Material Specifications

#### Pole Gain


- 65-45-12 Ductile Iron, hot-dipped galvanized per ASTM A153 (6" to 8" mounting centers)
- Accepts 5/8" pole mounting hardware
- Can be banded using the Aluma-Form Bolt-A-Band banding system.

#### End Fitting

- 65-45-12 Ductile Iron, hot-dipped galvanized per ASTM A153

#### Fiberglass Rod

- 1-1/2" diameter Super-Smooth, proprietary veiled gray polyester rod with added ultraviolet protection

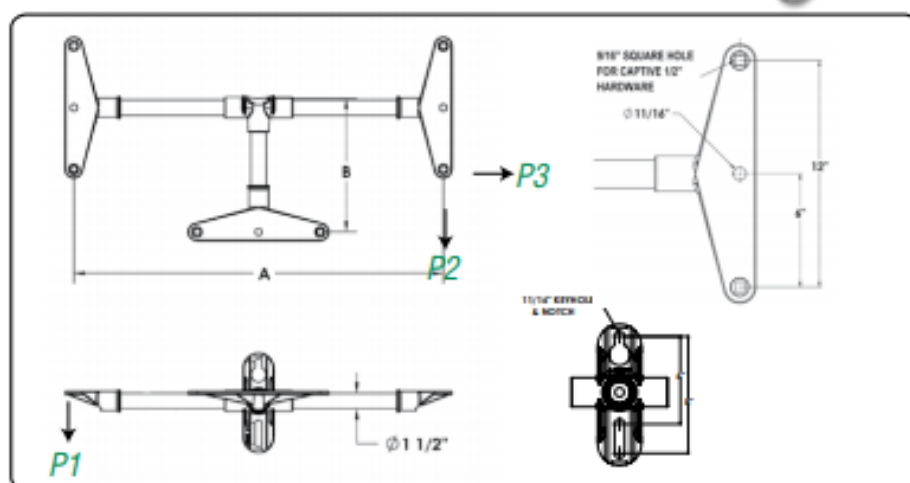

| Catalog Name       | Rod Diameter | Outside Standoff Length, A <sup>1</sup> | Middle Standoff Length, B <sup>1</sup> | Hardware <sup>2</sup> | Ultimate Load |          |          | Weight    |
|--------------------|--------------|-----------------------------------------|----------------------------------------|-----------------------|---------------|----------|----------|-----------|
|                    |              |                                         |                                        |                       | P1 (lbs)      | P2 (lbs) | P3 (lbs) |           |
| F3CA-MV-H3613-D3   | 1-1/2"       | 36"                                     | 13"                                    | No                    | 1,200         | 900      | 10,000   | 19.4 lbs. |
| F3CA-MV-H3613-D3-H | 1-1/2"       | 36"                                     | 13"                                    | Yes                   | 1,200         | 900      | 10,000   | 20.7 lbs. |
| F3CA-MV-H3618-D3   | 1-1/2"       | 36"                                     | 18"                                    | No                    | 1,200         | 900      | 10,000   | 20.0 lbs. |
| F3CA-MV-H3618-D3-H | 1-1/2"       | 36"                                     | 18"                                    | Yes                   | 1,200         | 900      | 10,000   | 21.3 lbs. |
| F3CA-MV-H4813-D3   | 1-1/2"       | 48"                                     | 13"                                    | No                    | 900           | 700      | 10,000   | 20.9 lbs. |
| F3CA-MV-H4813-D3-H | 1-1/2"       | 48"                                     | 13"                                    | Yes                   | 900           | 700      | 10,000   | 22.2 lbs. |
| F3CA-MV-H4818-D3   | 1-1/2"       | 48"                                     | 18"                                    | No                    | 900           | 700      | 10,000   | 21.5 lbs. |
| F3CA-MV-H4818-D3-H | 1-1/2"       | 48"                                     | 18"                                    | Yes                   | 900           | 700      | 10,000   | 22.8 lbs. |
| F3CA-MV-H4824-D3   | 1-1/2"       | 48"                                     | 24"                                    | No                    | 900           | 700      | 10,000   | 22.3 lbs. |
| F3CA-MV-H4824-D3-H | 1-1/2"       | 48"                                     | 24"                                    | Yes                   | 900           | 700      | 10,000   | 23.6 lbs. |

#### Notes:

1. Custom lengths available, contact factory or local sales representative.
2. Standard hardware includes captured 1/2" x 2" carriage bolt, 1/2" hex nut, 1/2" lock washer, & 1/2" star washer.