



16K GUYSTRAINS – CLEVIS / CLEVIS

SPECIFICATIONS


FITTINGS: DUCTILE IRON, 654512

ROD: SOLID, ELECTRICAL GLASS ROVING WITH ULTRA-VIOLET INHIBITORS. VEIL COATED.

HARDWARE: STEEL, HOT DIP GALVANIZED (CLEVIS PIN) / STAINLESS STEEL (COTTER PIN)

CATALOG NUMBER	LENGTH "A" INCHES	LENGTH "B" INCHES
FCC16-12	12	20
FCC16-18	18	26
FCC16-24	24	32
FCC16-30	30	38
FCC16-36	36	44
FCC16-42	42	50
FCC16-54	54	62
FCC16-60	60	68
FCC16-78	78	86
FCC16-96	96	104
FCC16-120	120	128
FCC16-144	144	152

RECOMMENDED WORKING LOAD 50% OF RATING LISTED

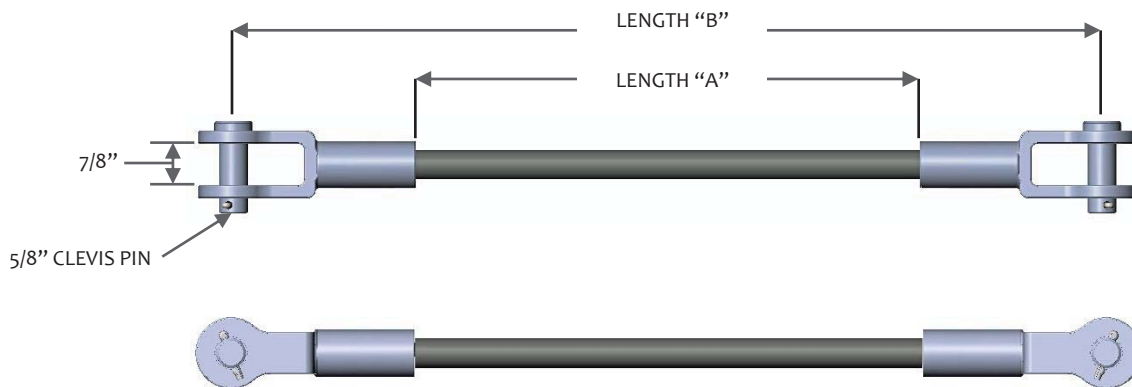

NOTE:

FOR OTHER LENGTHS PLEASE CONTACT US.

ADD SUFFIX "R" FOR (1) ROLLER (Example: FCC16-18R).

ADD SUFFIX "R2" FOR (2) ROLLERS (Example: FCC16-24R2).