



SINGLE PHASE 15° CUTOUT & ARRESTOR BRACKETS

SPECIFICATIONS

BASE: ALUMINUM, 356-T6


ROD: SOLID, ELECTRICAL GLASS ROVING WITH ULTRA-VIOLET INHIBITORS. VEIL COATED.

FITTING: ALUMINUM, 356-T6

HARDWARE: STEEL, HOT DIP GALVANIZED

CATALOG NUMBER	PHASE SPACING "A" INCHES	MINIMUM ULTIMATE LOAD (LBS)		
		VERTICAL A	LONG B	TRANS. C
FLHR-1-12-C1	12	1800	1400	1500
FLHR-1-15-C1	15	1500	1150	1500
FLHR-1-18-C1	18	1200	900	1500
FLHR-1-24-C1	24	900	650	1500

RECOMMENDED WORKING LOAD 50% OF RATING LISTED

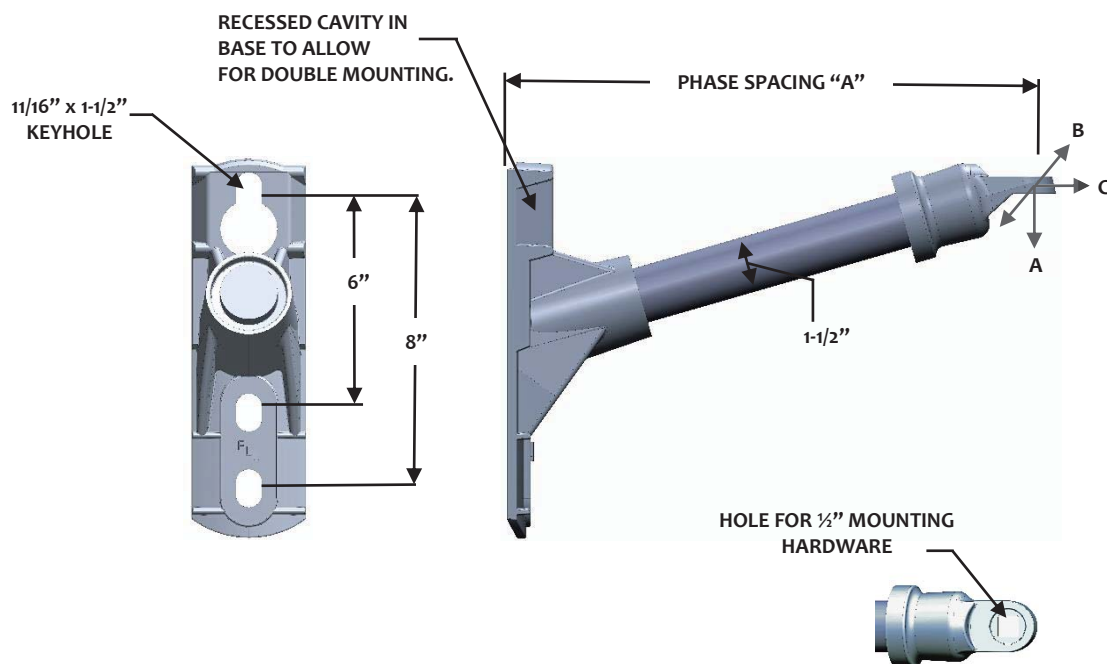

NOTE:

FOR OTHER LENGTHS PLEASE CONTACT US.

FOR BRACKET WITH 1/2" CAPTIVE CARRIAGE BOLT, SHAKEPROOF WASHER, LOCK WASHER AND HEX NUT, ADD SUFFIX "H" TO CATALOG. (EXAMPLE: FLH0-1-12C1-H)

FOR BRACKET WITH STRAP, ADD SUFFIX "S" TO CATALOG. (EXAMPLE: FLHR-1-12C1-S)

FOR BRACKET WITH STRAP AND HARDWARE, ADD SUFFIX "SH" TO CATALOG. (EXAMPLE: FLHR-1-12C1-SH)
TO SPECIFY SILICONE COATED ROD, ADD SUFFIX "SC" (I.E. = FLHR-1-12-C1-SC)