


HUBBELL Power Systems

Connector, Vise-Type

By Fargo

Catalog # [GA9405GL](#)

Single Bolt Aluminum Vise-Type Connector

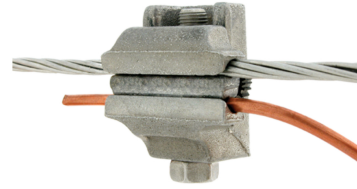

Features

- Recommended for aluminum or aluminum to copper distribution, service or tap connections
- Sealant is recommended on all connectors
- Optional snap-on cover available

Specifications

EU RoHS Indicator	No
UL Listed	No

Conductor

Conductor Diameter - Minimum	0.232 in
Conductor Diameter - Maximum	0.502 in
Conductor Diameter (Tap) - Minimum	0.081 in
Conductor Diameter (Main) - Maximum	0.502 in
Conductor Diameter (Main) - Minimum	0.232 in
Conductor Diameter (Tap) - Maximum	0.232 in
Conductor Type	Aluminum/Copper
Conductor Compatibility	• ACSR-Turkey-6-6/1 • ACSR-Swan-4-6/1 • ACSR-Swanate-4-7/1 • ACSR-Sparrow-2-6/1 • ACSR-Sparate-2-7/1 • ACSR-Robin-1-6/1 • ACSR-Raven-1/0-6/1 • ACSR-Quail-2/0-6/1 • ACSR-Pigeon-3/0-6/1 • AAC-Peachbell-6-7 • AAC-Rose-4-7 • AAC-Iris-2-7 • AAC-Pansy-1-7 • AAC-Poppy-1/0-7 • AAC-Aster-2/0-7 • AAC-Phlox-3/0-7 • AAAC 6201 Alloy-Akron-30.58-6/18 • AAAC 6201 Alloy-Alton-48.69-6/18 • AAAC 6201 Alloy-Ames-77.47-6/18

- AAAC 6201 Alloy-Azusa-123.3-6/18
- AAAC 6201 Alloy-Anaheim-155.4-6/18

Configuration

Bolt Head Type	Hex
----------------	-----

Dimensions

Bolt Diameter	0.38
Length	1.500 in
Length - Nut Flat-To-Flat	0.56 in
Weight	0.431 lb.
Height	2.500 in
Width	1.875 in
Diameter - Bolt Head	0.56 in
Diameter - Bolt	0.38 in
Dimensions	1.500 in x 1.875 in x 2.500 in

Force Related

Bolt Installation Torque (Recommended)	168 lb/ft
--	-----------

General

Product Category	Clamps
Material - Keeper	Aluminum Alloy
Material type	Non-Standard
Style	Single Bolt
Material - Bolt	Aluminum Alloy
Material - Hardware	Stainless Steel
Plating	No
UPC	096359451259
Grommets	Yes
Inhibitor Loaded	Yes
Material - Spacer	Aluminum
Material	Aluminum Alloy
Material - Body	Aluminum Alloy

Logistics

Pallet Quantity	4800
-----------------	------

Product Assets

[Catalog \[English\]](#)



A Hubbell brand