

EXAMPLE CATALOG NUMBER

GS 30 012 CC2 SC

(SML) LOAD RATING
LENGTH BETWEEN END FITTINGS
PER TABLE "A" INCHES
END FITTINGS
PER SUFFIX TABLE
ADD SC AT END FOR
SILICONE COATED ROD

END FITTING SUFFIX TABLE		
SUFFIX	END 1	END 2
CC	CLEVIS	CLEVIS
CC1	CLEVIS	CLEVIS + ROLLER
CC2	CLEVIS + ROLLER	CLEVIS + ROLLER

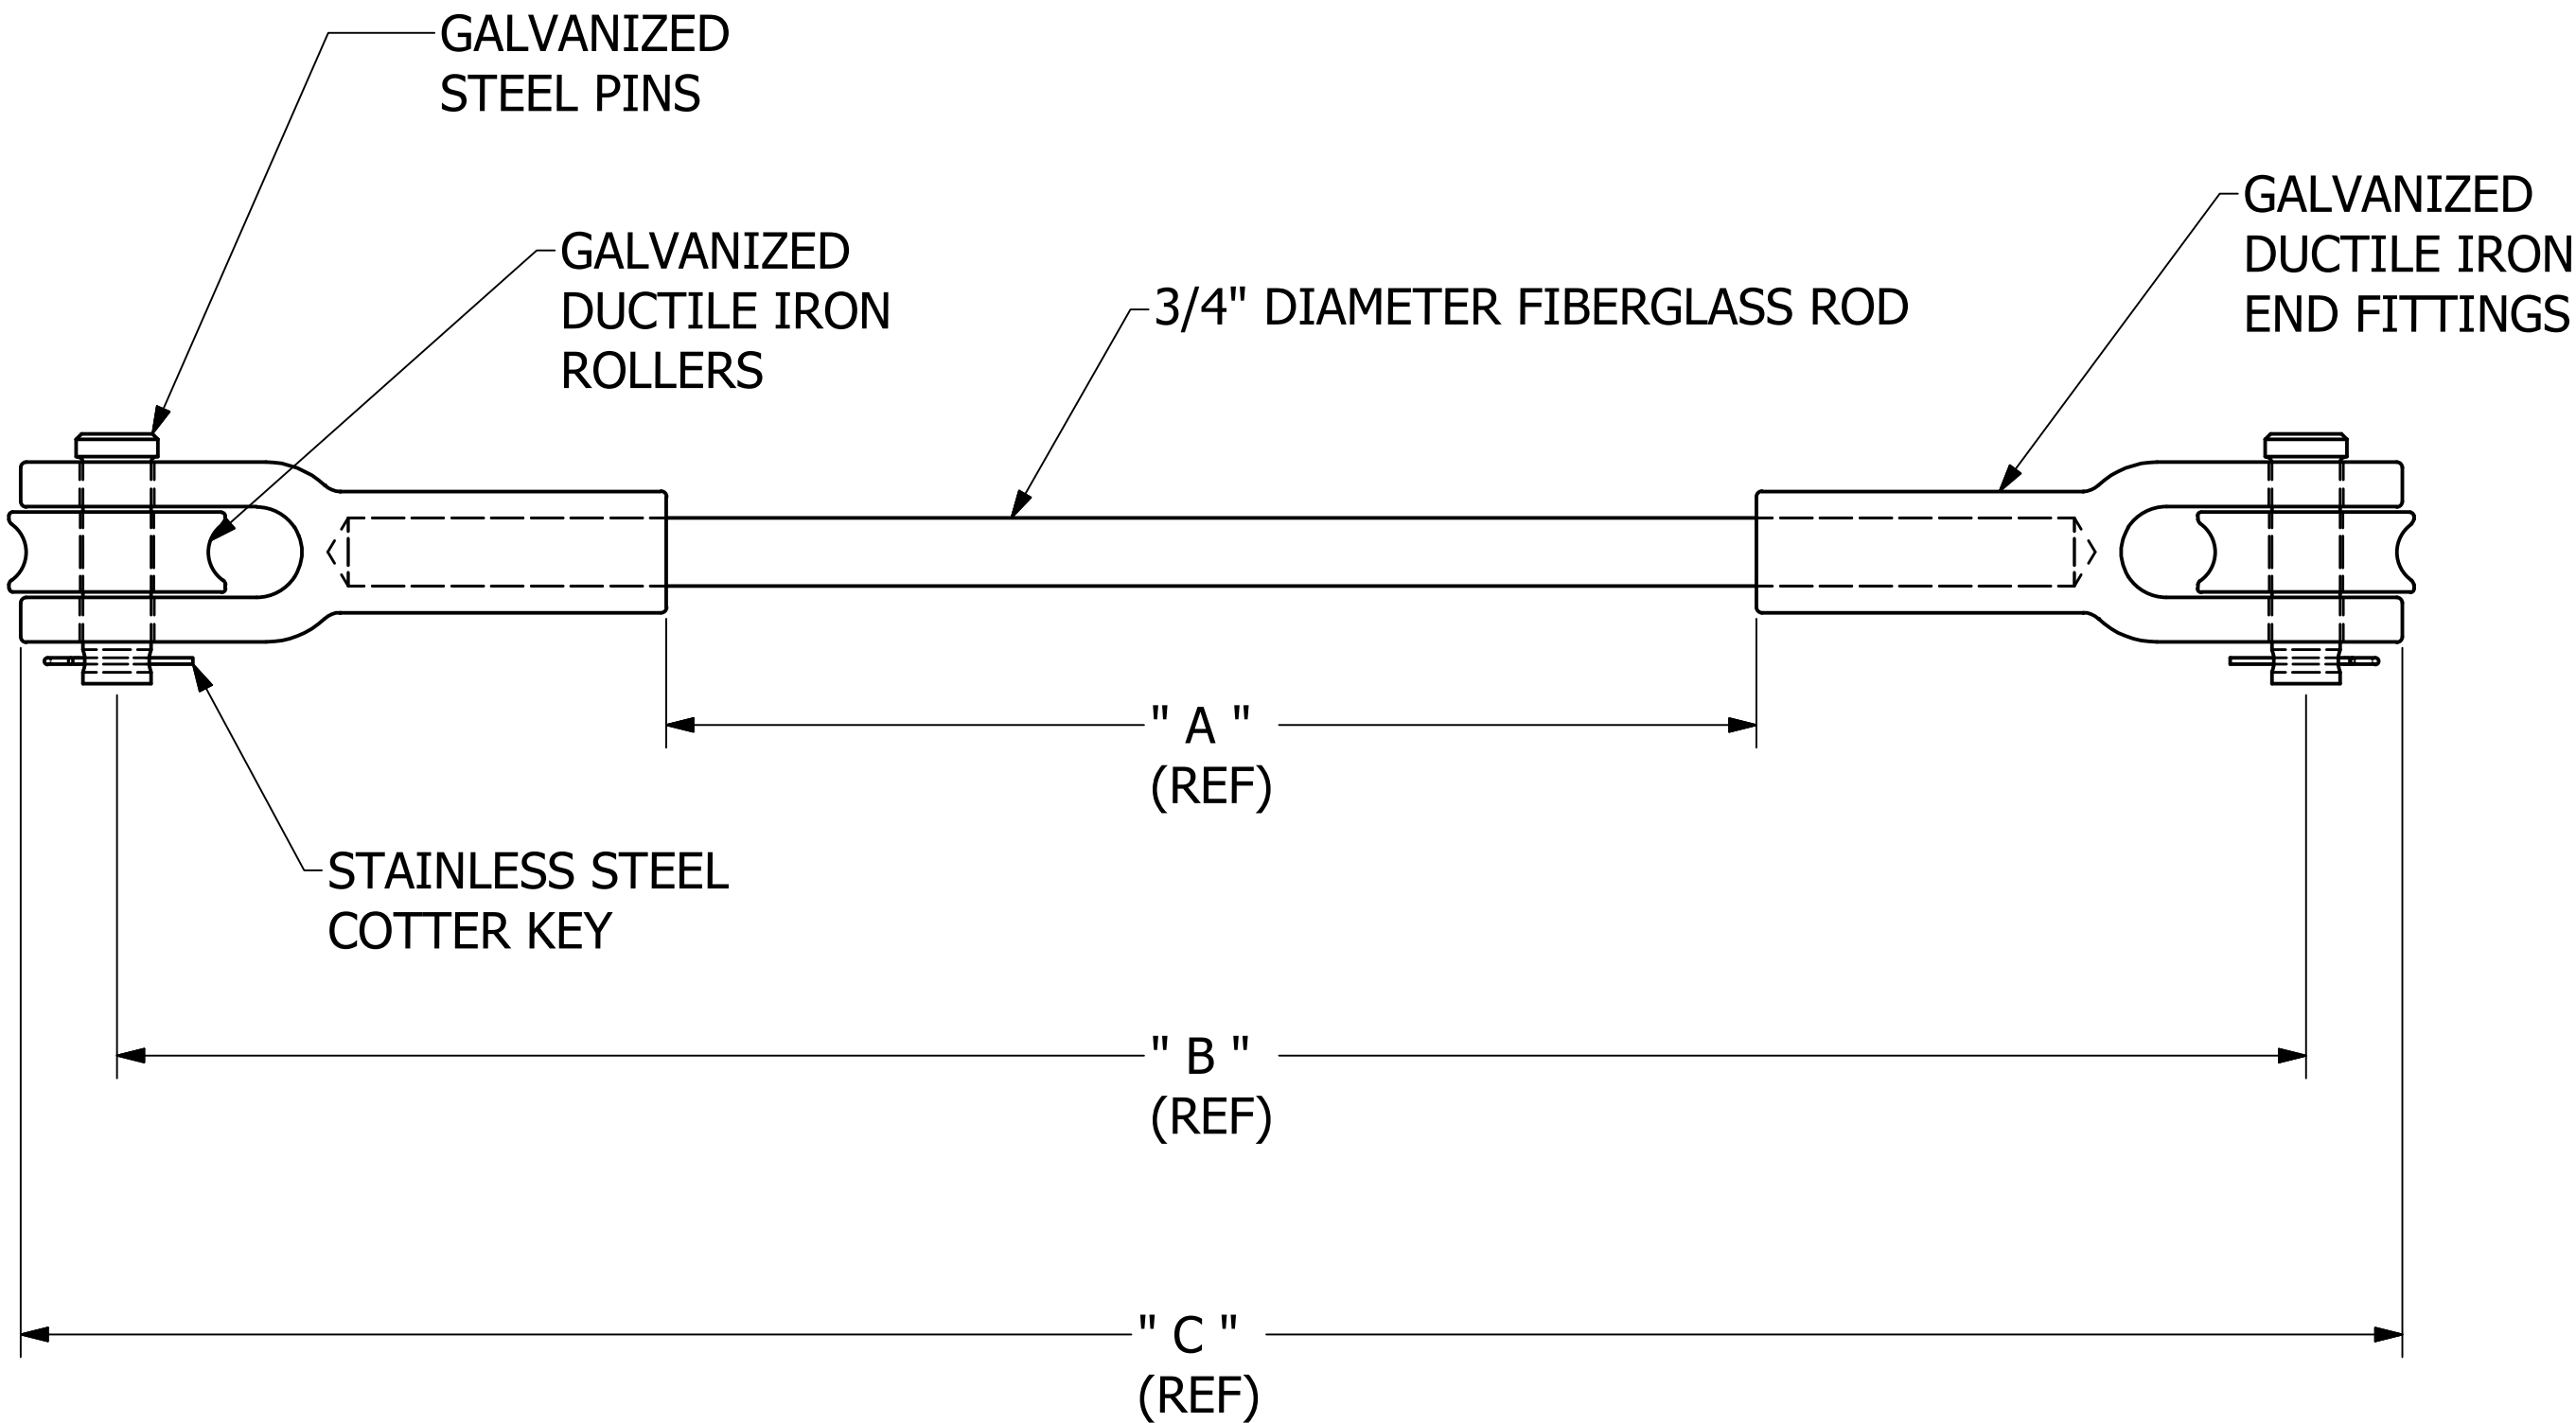


TABLE		
" A "	" B "	" C "
012	24	26.2
018	30	32.2
024	36	38.2
030	42	44.2
036	48	50.2
042	54	56.2
048	60	62.2
054	66	68.2
060	72	74.2
072	84	86.2
078	90	92.2
084	96	98.2
090	102	104.2
096	108	110.2
108	120	122.2
120	132	134.2
144	156	158.2

THIS SYMBOL IDENTIFIES
CRITICAL FEATURES

CHANCE®		HUBBELL® POWER SYSTEMS, INC.		
CONFIDENTIAL: THIS DRAWING AND ITS CONTENTS ARE CONFIDENTIAL AND THE EXCLUSIVE PROPERTY OF HUBBELL POWER SYSTEMS. NO PUBLICATION, DISTRIBUTION, OR COPIES MAY BE MADE WITHOUT THE WRITTEN CONSENT OF HUBBELL POWER SYSTEMS. HUBBELL POWER SYSTEMS UNPUBLISHED ALL RIGHTS RESERVED UNDER THE COPYRIGHT LAWS.		TITLE 30K GUY STRAIN		
		SIZE C	CAT / PART / ASSY NO. SEE CHARTS	DWG NO. GS30xxxCCx
		DO NOT SCALE THIS DRAWING	DRN BY RAM	REV -
		DATE 8/24/17		SHEET 1 OF 1