



OmniMax[®]

The LED Replacement
lamp that doesn't
compromise



Unique Design



Beautiful Light



Easy Installation



OmniMax®

Rethinking LED in Every Direction

OmniMax is a compact, omni-directional LED replacement lamp for Acorn, Post Top, Pendant and other decorative and architectural outdoor light fixtures. OmniMax enables you to seamlessly transition to LED technology while maintaining the light quality of your existing fixture. Like all Evluma products, OmniMax is engineered to last and **backed by a 10 year comprehensive warranty.**

The Best Overall Value in LED Replacements

Cost	Efficiency	Reliability
Less than ½ the price of many OEM retrofits	Less than ⅓ the energy of a 100W HPS (vs 40W OM)	10 year warranty

Product Configurations


- + 40W, 70W & 100W
- + Replaces 70-175W HID Bulbs
- + 5000K, 4000K, 3000K, 2700K, 2200K & 2000K CCT
- + E26 or E39 base



2000K OmniMax replicates the warm glow of HPS
but with the visual clarity and quality of LED



All the benefits of LED, without
sacrificing the light you love

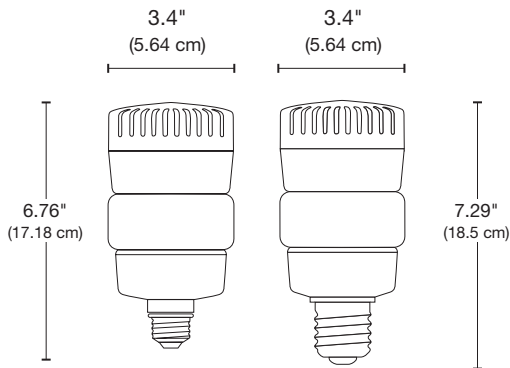


Compact Size

OmniMax emulates the HID bulbs it replaces. It installs easily in any fixture and uses the luminaire's optics as they were designed.



Omnidirectional Light Engine

The 96 radially mounted LEDs at the OmniMax's burn center provide light that is consistent, adjustable, and pleasant.



Photocontrol Failsafe™

Say goodnight to "dayburners," and never roll another truck to replace a failed photocontrol.




ConnectLED™

Walk-by programming via iOS or Android device using secure, BLE technology.



Features

- 1 Brushless fan with > 90,000 hr life
- 2 Thermal protection circuitry
- 3 Molded silicone, matte-finish optics
- 4 20kV/10kA surge protection
- 5 96 radially mounted LEDs
- 6 Photocontrol Failsafe™
- 7 E26 or E39 Base



Fits Any Luminaire



Upright



Globe



Acorn



Residential Lighting



Transit and Street Lighting



Park Lighting

Ordering Information Sample Number: OMNI-70-3K-MO

Product Family	Watts (nom)	CCT	Base	Option	CRI	Source Lumens	LED mA	Lm/W
40W LED (Recommended to replace up to 100W HPS / 150W MH)								
OMNI	40	2K = 2000K 22 = 2200K	ME = Medium	STD = Standard	>80	>3800 >4200 >5300 >5400 >5600 >5700	60 mA	>93 >97 >135 >138 >143 >145
		27 = 2700K 3K = 3000K 4K = 4000K 5K = 5000K	MO = Mogul	Standard ships without Bluetooth or Photocontrol Failsafe built-in.				
70W LED (Recommended to replace up to 150W HPS / 175W MH)								
OMNI	70	2K = 2000K 22 = 2200K	ME = Medium	STD = Standard	>80	>5900 >6600 >8500 >8700 >9000 >9100	105 mA	>87 >92 >122 >125 >130 >132
		27 = 2700K 3K = 3000K 4K = 4000K 5K = 5000K	MO = Mogul	Standard ships without Bluetooth or Photocontrol Failsafe built-in.				
100W LED (Recommended to replace up to 150W HPS / 175W MH)								
OMNI	100	2K = 2000K 22 = 2200K 27 = 2700K	ME = Medium	STD = Standard	>80	>7675 >8125 >10650 >11225 >11650 >11800	138 mA	>75 >80 >108 >110 >115 >115
		3K = 3000K 4K = 4000K 5K = 5000K	MO = Mogul	Standard ships without Bluetooth or Photocontrol Failsafe built-in.				



Only select MO base models are qualified by The DesignLights Consortium www.designlights.org/search/

Technical Specs

Certification Data

UL 1598/8750 & UL1598C MET
ANSI C136.31 3G Level 2
Vibration Bridge/Overpass

Electrical

120-277 VAC 60hz

Evluma Proprietary Class II Driver
20kV/10kA Category High C surge protection
IEEE/ ANSI C62.41.2 - 2002
100W tested to IEEE/ANSI C136.2:2018

Power Factor >99% at 120 VAC
THD <19% at 120 VAC
Power Factor >95% at 277 VAC
THD <11% at 277 VAC

Lumen Maintenance

L70 (10,000) > 60,000
LM at 10,000 hours = 97%
LM at 100,000 hours = 80%
L70 (TM-21) > 100,000

-40°C Min Ambient Temp (Outside Fixture)
40°C Max Ambient Temp (Outside Fixture)

Evluma makes one thing: Utility-grade outdoor LED lighting solutions

From heat management, to light quality, to integrated controls, we've been solving the biggest challenges in LED for over 2 decades. We help cities, municipalities and utility providers evolve their lighting infrastructure to meet needs of tomorrow.

TP-0016 REV A12

Copyright © 2025 Express Imaging Systems, LLC. EVLUMA, AREAMAX, CONNECTLED, PHOTOCONTROL FAILSAFE, THE EVOLUTION OF ILLUMINATION are trademarks of Express Imaging Systems, LLC. All rights reserved.



846 Industry Drive
Seattle, WA 98188
425-336-5800
www.evluma.com