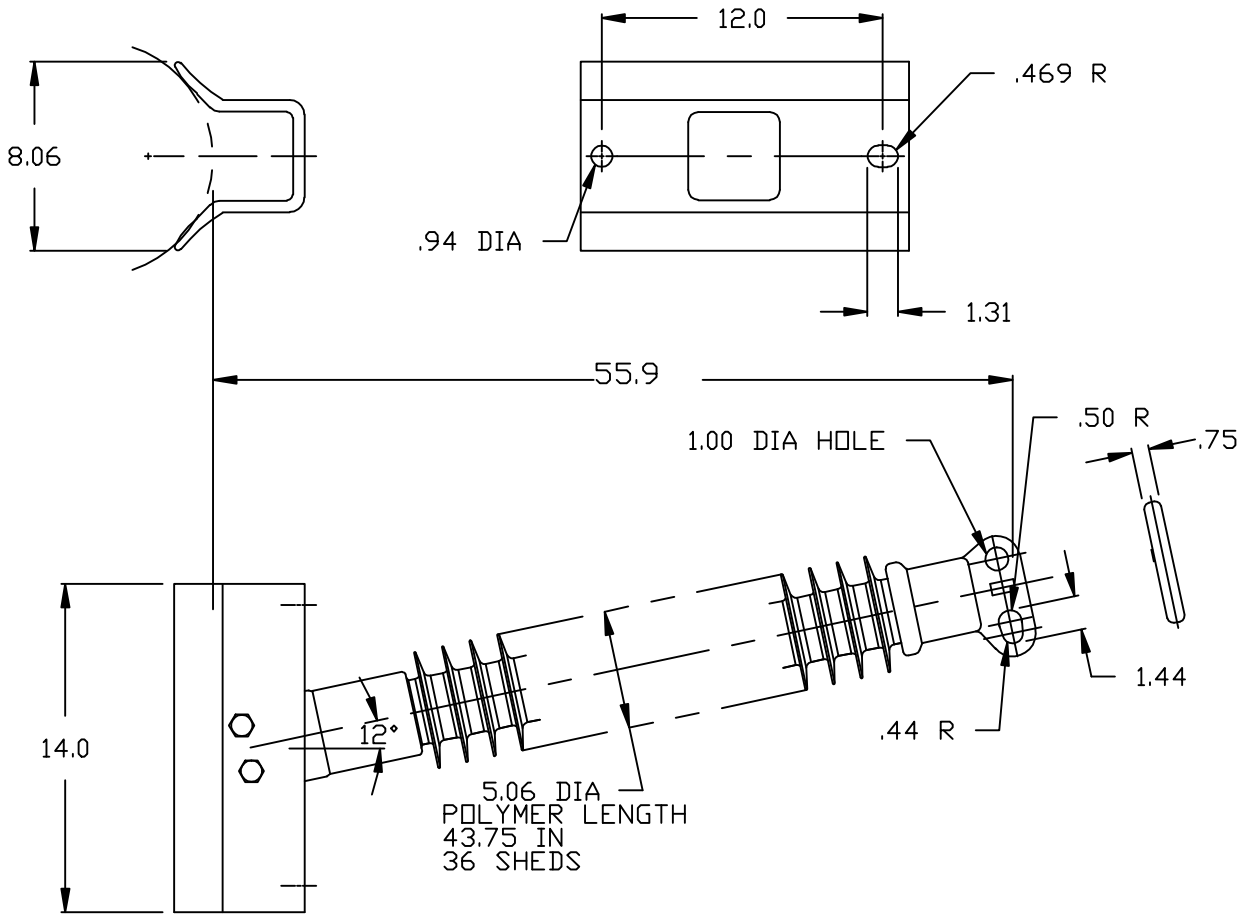


STRIKE DISTANCE	44 IN
LEAKAGE DISTANCE	113 IN
SCL	3250 LB (14.5 kN)
RCL	1625 LB (7.2 kN)
DRY 60 HZ FLASHOVER	455 kV
WET 60 HZ FLASHOVER	405 kV
WET 60 HZ WITHSTAND	340 kV
IMPULSE CRITICAL POSITIVE	700 kV
IMPULSE WITHSTAND POSITIVE	665 kV
IMPULSE CRITICAL NEGATIVE	800 kV
IMPULSE WITHSTAND NEGATIVE	760 kV
WEIGHT	54 LB

FLOOD WASHABLE
SILICONE RUBBER HOUSING

ELECTRICAL CHARACTERISTICS IN ACCORDANCE WITH ANSI C29.1-1988

Program Revision

REV DATE 01/31/18

CONFIDENTIAL: THIS DRAWING AND ITS CONTENTS ARE CONFIDENTIAL AND THE EXCLUSIVE PROPERTY OF HUBBELL POWER SYSTEMS. NO PUBLICATION, DISTRIBUTION OR COPIES MAY BE MADE WITHOUT THE WRITTEN CONSENT OF HUBBELL POWER SYSTEMS. HUBBELL POWER SYSTEMS UNPUBLISHED ALL RIGHTS RESERVED UNDER THE COPYRIGHT LAWS.

HUBBELL® POWER SYSTEMS

TITLE
QUADRI*SIL LINE POST SERIES 250

SIZE	DWG NO.	CAT / PART / ASSY NO.	REV
S	ER_250-QP	P250043S0020	11

DO NOT SCALE THIS DRAWING	DRN BY NON	DATE 08/27/07	SHEET 1 OF 1

1:8