
HUBBELL
Power Systems

# Quadri*Sil Horizontal Line Post Insulator

By Ohio Brass
Catalog # P250043S0020

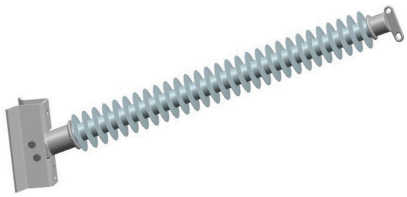

2.5" Line Post, Standard Leak, Two Hole Blade, Aluminum Gain Base with 12" CL holes for 7/8" bolts

## Features

- Made from hydrophobic silicone polymer

## Specifications

| | |
|---|---|
| Buy America(n) Qualified | Buy American Act Compliant (All status valid till December 2026) |
| Buy American Compliant | Yes |

## Configuration

| | |
|---|---|
| Number of Sheds | 36 |

## Current

| | |
|---|---|
| Creep and Leakage Distance | 114 IN (2896 MM) |
| Critical Impulse Flashover (CIFO) - Negative | 800 |
| Critical Impulse Flashover (CIFO) - Positive | 700 |
| kV Class | 138.00 kV |
| Flashover Voltage - 60 Hz Wet | 405 |
| Arc Distance - Dry | 44.3 IN (1125 MM) |
| Flashover Voltage - 60 Hz Dry | 455 |

## Dimensions

| | |
|---|---|
| Diameter - Shed(s) | 5.06 |
| Weight | 59.6 lb. |
| Height | 20.99 in |
| Width | 8.06 in |
| Thickness - Housing | > 3MM |
| Rod Diameter | 2.500 in |
| Length | 59.24 in |
| Length - Effective | 55.8 in |
| Angle | 12 |
| Dimensions | 59.24 in x 8.06 in x 20.99 in |

## Force Related

| | |
|---|---|
| Cantilever Bending Strength - Max. | 3200 LB |
| Cantilever Bending Strength - Routine | 1600 LB |

## General

| | |
|---|---|
| Product Type | Standard Leak |
| Shed Style | Uniform |
| UPC | 096359442127 |
| Fitting - Live Line End | Tear Drop Blade |
| Fitting - Ground End | Aluminum Gain |

## Product Assets

Catalog [English]
Sales Drawing [English]



© 2026 Hubbell Incorporated. All rights reserved