


EQUIPMENT MOUNTS


3-Phase Curved Tube Equipment Mounts

FOR THRU-BOLT MOUNTING

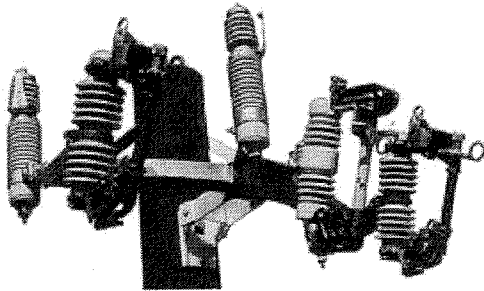


MODELS #R3CA AND R3CA-48

For mounting cutouts, arresters or terminations. Strong torsion-resistant mount to receive 6 pieces of equipment. Mounts on wood poles with 5/8" thru-bolt and 3 lag screws (not furnished). Each mounting position of Model R3CA tested, without braces to 250 pounds with a safety factor of 2. Braces offer extra strength and rigidity to assist lineman in opening and closing cutouts. Grounding device supplied.

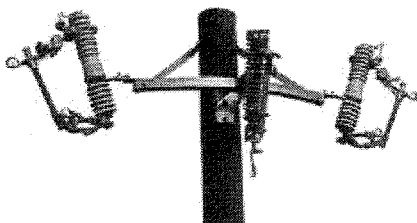




MODELS #R3CA-C AND R3CA-C-48

Identical to above except that end fittings permit the mounting of combination cutout-lightning arrester units, terminations or single cutouts that require only one bolt for mounting. Mounts 3 pieces of equipment.

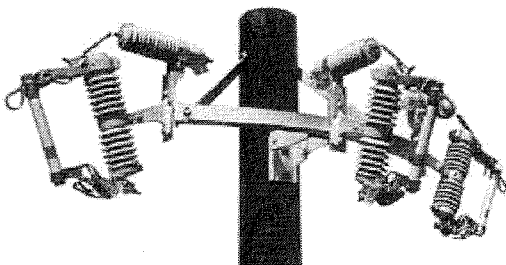

MODELS #R3CA-2C AND R3CA-2C-48

Same as above except that end fittings are designed to hold 3 combination cutout-lightning arrester units that require 2 bolts for mounting. Also mounts NEMA L bracket.

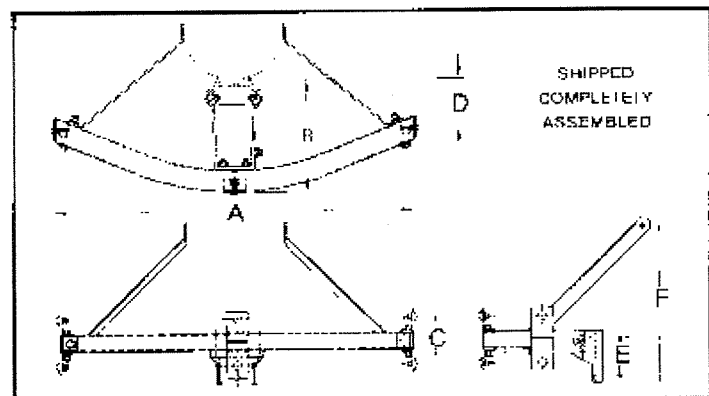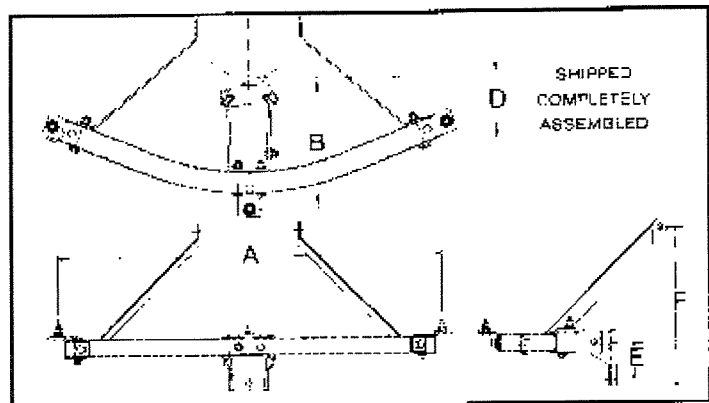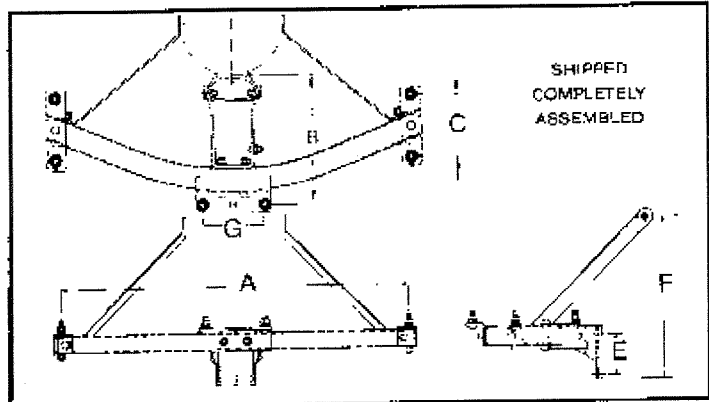

Catalog No.	Product No.	A	B	C	D	E	F	G
R3CA	51839	34 1/2"	12 1/4"	6"	-	3 5/8"	±19"	6"
R3CA-C	51840	38 5/8"	12 7/8"	-	4 3/8"	3 5/8"	±19"	-
* R3CA-2C	51841	36 5/16"	11 5/16"	4 7/16"-5 3/16"	4 1/8"	3 5/8"	±19"	-
R3CA-48	51842	48"	15"	10"	-	3 5/8"	±19"	10"
R3CA-C-48	51843	52 1/4"	12 7/8"	-	1 7/16"	3 5/8"	±19"	-
* R3CA-2C-48	51844	49 13/16"	11 5/16"	4 7/16"-5 3/16"	1 5/16"	3 5/8"	±19"	-

*C Dimension adjustable

TO ORDER UNITS WITHOUT BRACES ADD LB TO CAT. NO.