






DEADENDS AUTOMATIC WEDGE SERVICE ENTRANCE/DROP ALUMINUM

ALUMINUM
SW

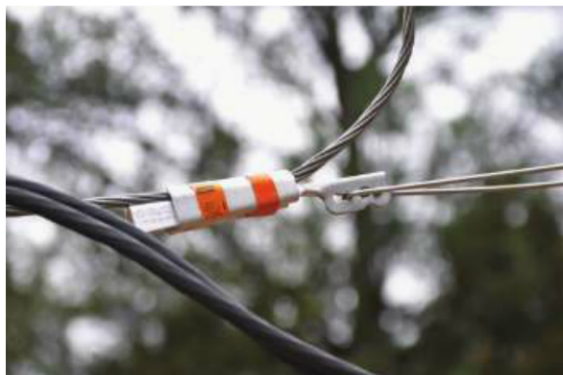

- For deadending and stress relief of service entrance/drop installations.
- For use with ACSR, AAC, & AAAC conductors.
- Service wedge to be attached to bare neutral.
- Rigid stainless steel bails are for use with eye hooks and insulators with diameters larger than 1.5" in diameter.
- Flexible bails are for use with hooks and small eyes.
- Design allows for easy sag adjustments.
- Service wedges are not full tension devices (see tensile rating). May be used in slack span applications.[†]
- Each wedge has two tape bands.
- The warning label is always orange (outside band).
- The size indicator is color coded as listed below (inside band, closest to bail).
- Locking mechanism secures latch on the rigid bail to prevent opening during installation.

Material: **Body and Keeper** - Aluminum Alloy
Bail - Solid: Stainless Steel
 Flex: Covered Stainless Wire Braid (FL Suffix)

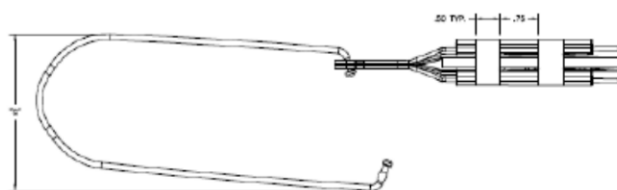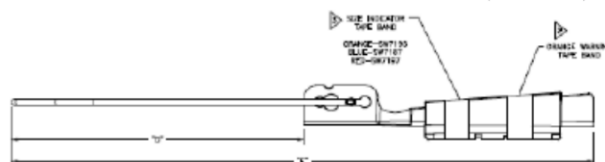

Gripping unit gentle
on conductor

Product Data & Conductor Size

CATALOG NUMBER	DESCRIPTION	CONDUCTOR SIZE			DIA RANGE IN (MM)	DIMENSIONS			MECH. STR. LBS. (kN)	SIZE INDICATOR COLOR
		ACSR	AAC	AAAC		A	B	C		
SW7195LB	WEDGE w/RIGID SS BAIL	#6 - #2	#6 sol - #1 str	#6 - #2	.160 - .332 (4.1-8.4)	6 (150)	12 (300)	2-1/2 (64)	1000 (4.45) 800 max for #6 ACSR	Orange
SW7195FL	WEDGE w/FLEXIBLE BAIL					10-1/4 (260)	16-1/8 (410)	Flex		
SW7187LB	WEDGE w/RIGID SS BAIL	#4 - 1/0	#2 sol - 2.0 str	#4 - 1/0	.248 - .414 (6.3-10.5)	5 - 7/8 (145)	12 - 1/4 (310)	2 - 1/2 (64)	1200 (5.34) 900 max for #4 ACSR	Blue
SW7187FL	WEDGE w/FLEXIBLE BAIL					10 - 1/2 (265)	17 (430)	Flex		
SW7197LB*	WEDGE w/RIGID SS BAIL	2/0 - 4/0	2/0 - 4/0	2/0 - 4/0	.414 - .565 (6.3-14.4)	5 - 3/4 (145)	13 (325)	2 - 3/4 (69)	1600 (7.12)	Red
SW7197FL*	WEDGE w/FLEXIBLE BAIL					10 - 1/8 (255)	17 - 1/4 (435)	Flex		

Add "I" for anodized version

*Can also be used with 1/0 (6/1) ACSR to 1600 lb max

[†]Slack span is defined as weight of conductor only.