


Aluminum mechanical splice kits

Aluminum Flood-Seal® mechanical splice kits

Range taking – no compression tools and dies required.

- Prefilled with oxide inhibitor to prevent oxidation and keep out moisture
- Dual-rated and approved for use with aluminum or copper conductors

- EPDM rubber splice covers ensure a fully insulated, watertight repair splice – there's no taping, heat shrink or mastic required
- Sized for most conductors perfect for repairing any 2-, 3- or 4-wire installation
- RUS Accepted

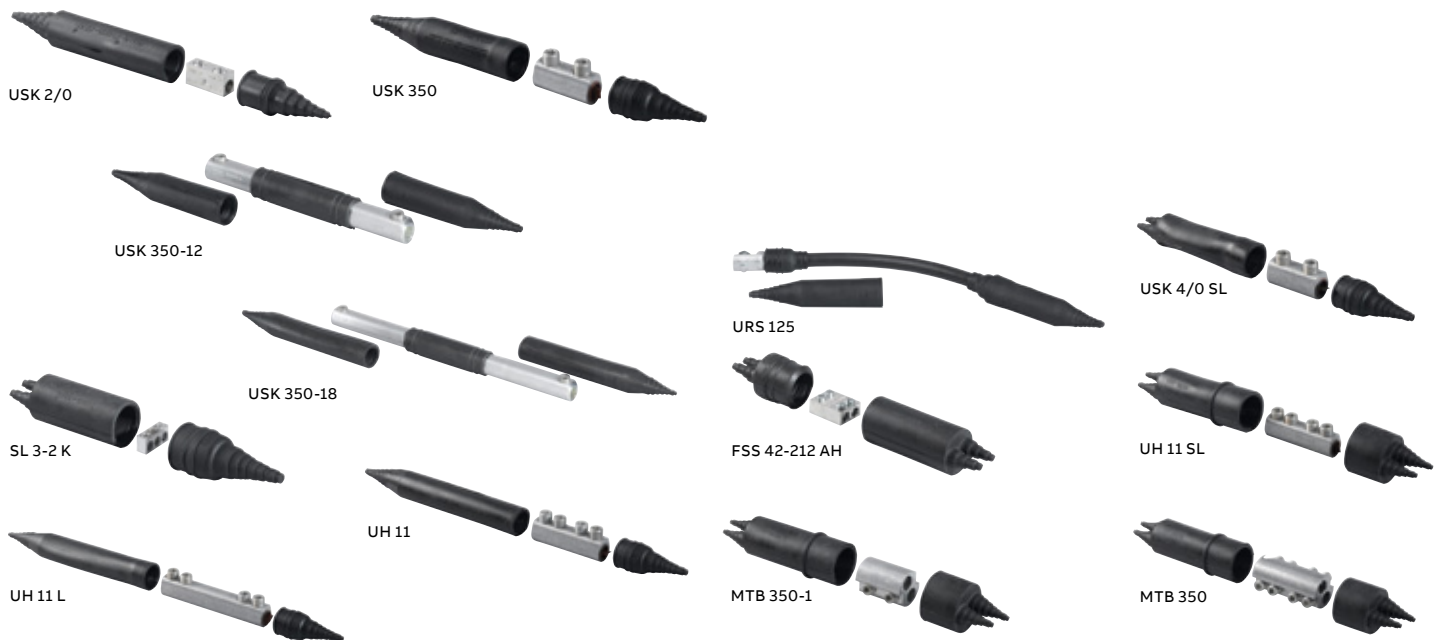

Two-wire kits

Cat. no.	Conductor range (AWG or kcmil)	Connector length (in.)	Number of screws per side
USK 2/0 (slotted screw)	#14–2/0	1½	1
USK 2/0 AH		1½	
USK 4/0	#4–4/0	2	
USK 350*	#6–350	2¾/16	
USK 350-4		4	
USK 350-12*†		12	
USK 350-18*†		18	
UH 11		4¼/16	2
UH 11 L†		6½	
USK 350-12 DS		12	
USK 350-18 DS†		18	
USK 500	#2–500	4¾/16	
USK 500 L†		7½	
USK 500-12†		12	
USK 500-16†		16	
USK 750	250–750	16¾/16	

* UL Listed. † Repair kits.

Kits

Cat. no.	Conductor range (AWG or kcmil)	Connector length (in.)
Compression-type repair kits		
URS 125	#2–350 (standard one-hole lugs)	17½
Three-wire kits		
SL 3-2 K	#4–#14 Cu / #2–#14 Al	3
USK 4/0 SL	Side “A” (#6–350), Side “B” (1/0–4/0 with #6–#14 sol. tap)	Accommodates 3 wires
Four-wire kits		
FSS 42-212 AH	#2–#12	4
UH 11 SL	Side “A” (#6–350), Side “B” (1/0–4/0 with #6–#14 sol. tap)	Accommodates 4 wires
MTB 350-1	#6–350	4
MTB 350		