

LINE POST

CAT. NO. VI 57-2

34.5 kV

ANSI CLASS 57-2

F NECK

DIMENSIONS:

LEAKAGE DISTANCE	IN	22
DRY ARCING DISTANCE	IN	95

MECHANICAL VALUES:

CANTILEVER STRENGTH	LB	2,800
---------------------	----	-------

ELECTRICAL VALUES:


60 HERTZ FLASHOVER-DRY	kV	100
60 HERTZ FLASHOVER-WET	kV	70
IMPULSE FLASHOVER-POSITIVE	kV	180

RADIO INFLUENCE VOLTAGE DATA:

60 HERTZ TEST VOLTAGE TO GROUND	kV	22
MAXIMUM R.I.V. @ 1000 kHz	μV	100

PACKAGING INFORMATION:

NET WEIGHT, PER 100	LB	1,550
PACKED WEIGHT, PER 100	LB	1,600
NO. IN STANDARD PACKAGE		3

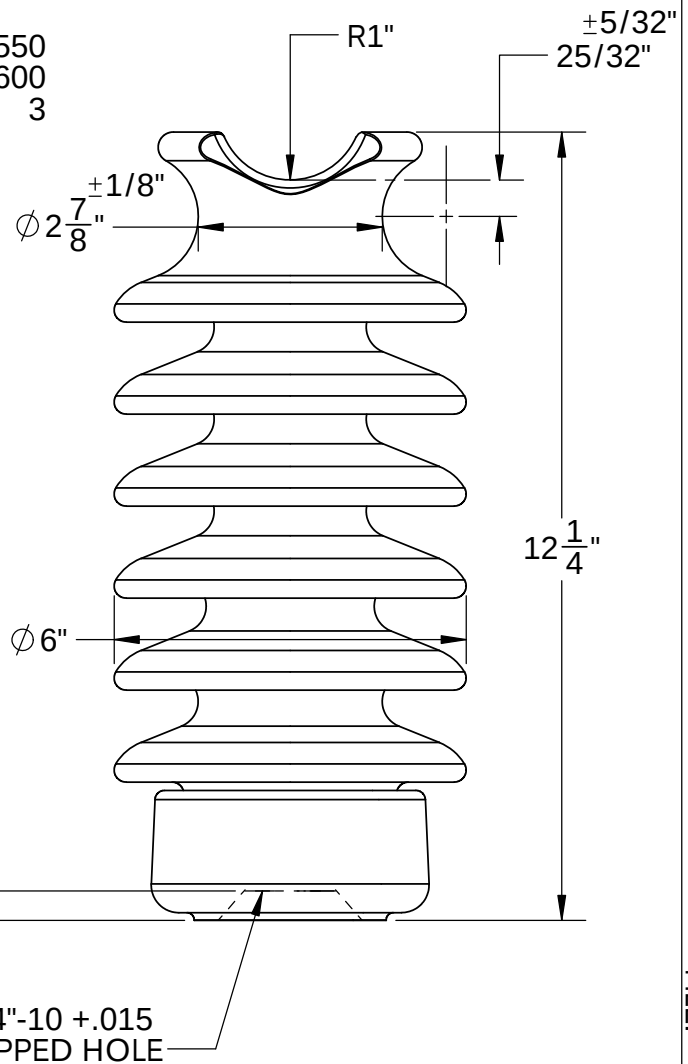

THIS DRAWING IS THE PROPERTY OF VICTOR INSULATORS, INC. AND CONTAINS PROPRIETARY AND CONFIDENTIAL INFORMATION WHICH MUST NOT BE DUPLICATED, USED, OR DISCLOSED OTHER THAN AS EXPRESSLY AUTHORIZED BY VICTOR INSULATORS, INC.

APPROVED

By A. E. Schwalm at 1:44 pm, Apr 05, 2017

04-05-17

TM



Victor Insulators, Inc.

280 Maple Avenue
Victor, New York 14564
Telephone: (585)924-2127
www.victorinsulators.com

VI 57-2

SUPERSEDES VI 57-2 DATED 06-08-12