

PINTYPE INSULATOR

CAT NO: VI 605R

C-NECK 1" PINHOLE

ANSI CLASS 55-3

DIMENSIONS:

LEAKAGE DISTANCE IN 7

MECHANICAL VALUES:

CANTILEVER STRENGTH LB 2,500

ELECTRICAL VALUES:

60 HERTZ FLASHOVER-DRY kV 55

60 HERTZ FLASHOVER-WET kV 30

IMPULSE FLASHOVER-POSITIVE kV 90

IMPULSE FLASHOVER-NEGATIVE kV 110

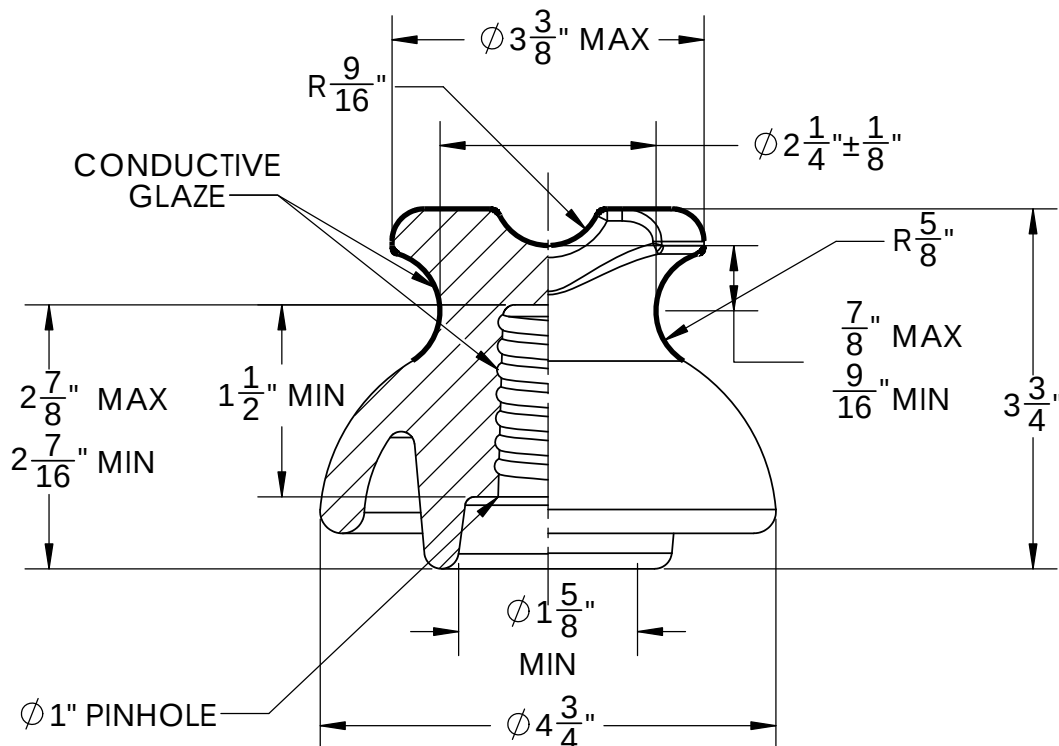
60 HERTZ PUNCTURE VOLTAGE kV 90

ALL DATA CONFORMS
TO ANSI C29.5 LATEST
REVISION THEREOF**RADIO INFLUENCE VOLTAGE DATA:**60 HERTZ TEST VOLTAGE TO GROUND kV 10
MAXIMUM R.I.V. @ 1000 kHz μ V 50**PACKAGING INFORMATION:**

NET WEIGHT, LB 213

PACKED WEIGHT LB 235

NO. IN STANDARD PACKAGE 12

**APPROVED**

By A. E. Schwalm at 3:45 pm, Jul 07, 2020

**Victor Insulators, Inc.**280 Maple Avenue
Victor, New York 14564
Telephone: (585)924-2127
www.victorinsulators.com**VI605R**