


CATALOG NUMBER	COPPER CONDUCTOR SIZE		DIMENSIONS				INSTALLATION DATA			
	RUN	TAP	FIG.	S	H	L	DIE INDEX NO.	OUR840	MD6 MD7	NO. OF CRIMPS
YGC10C10	#10 SOLID #10 STRANDED	#10 SOLID #10 STRANDED	1	.14 [5]	.37 [12]	.32 [13]	238	W238	W238	1
YGC8C	#8 SOLID #8 STRANDED	#8 SOLID #8 STRANDED	1	.18 [5]	.46 [12]	.52 [13]	162	W162	W162	2
YGC6C8	#6 SOLID #6 STRANDED	#8 SOLID #8 STRANDED	2	.26 [7]	.73 [19]	.62 [16]	BG	X-BG	W-BG	2
YGC6C6	#6 SOLID #6 STRANDED	#6 SOLID #6 STRANDED	2	.27 [7]	.76 [19]	.62 [16]	BG	X-BG	W-BG	2

REV	DATE	DESCRIPTION	ECO	BY	C'H'K.
B	03/24/2017	REDRAWN AND ADDED "YGC10C10	46341	AM	GS

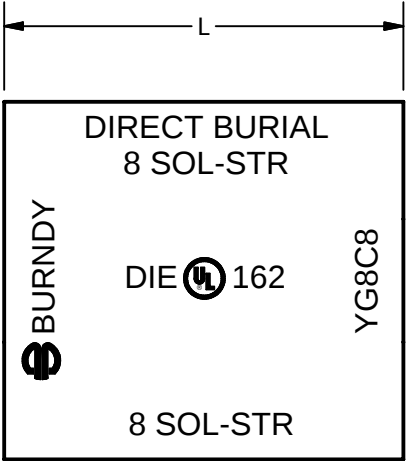

TYPICAL LETTERING

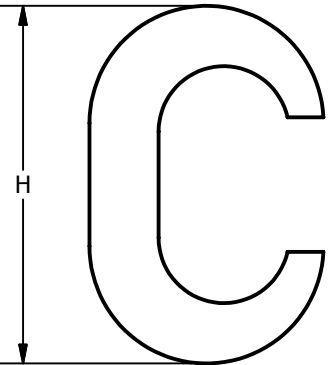


FIG. 1

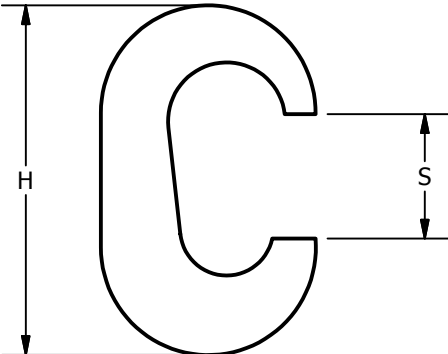


FIG. 2

NOTES:

1. MATERIAL: COPPER
2. CONNECTOR IS PREFILLED WITH PENETROX™ "E2" AND STRIP-SEALED
3. UL467 LISTED "GROUNDING AND BONDING EQUIPMENT", AND RATED FOR DIRECT BURIAL IN EARTH OR CONCRETE.
4. DIMENSIONS IN BRACKETS [] ARE IN MILLIMETERS ROUNDED OFF TO THE NEAREST MILLIMETER, UNLESS OTHERWISE SPECIFIED AND ARE FOR REFERENCE ONLY.

TO ORDER BURNDY® PRODUCTS CALL UNITED STATES 1-800-346-4175 (LONDONDERRY, NH) CANADA: 1-800-361-6975 (QUEBEC) 1-800-387-6487 (ALL OTHER PROVINCES) FOR PRODUCT INFO: http://www.burndy.com	CRIMPIT™			
	ITEM NO: --			
	CAT. NO:YGC-C- (SEE TABLE)			
	DRAWN BY: A.MONTMINY	3/24/2017		
	CHECKER: --			
	DSN APRVL: J.HOGAN	6/7/2017		
	MFG APRVL: J.HEAD	5/25/2017		
	QA APRVL: B.POST	5/25/2017		
	MKT APRVL: --			
	PROD FAM: --		DRAWING NO	REV
	PROJECT #: --	SIZE	SD209501	B
	DOCUMENT TYPE: SALES	B	SHEET 1 OF 1	
	REL LEVEL: Released			