DRAWING NO. SD045569-01

CATALOG NUMBER	FIG. NO.	ACCOMMODATES 1 — GROOVE 'A' SOLID CU. OR AL.	GROOVE 'A' STRANDED CU. OR AL.	GROOVE 'A' STRANDED COMPRESSED	GROOVE 'A' A.C.S.R.	GROOVE 'A' A.C.S.R. COMPRESSSED	GROOVE 'B' SOLID CU.OR AL.	GROOVE 'B' STRANDED CU. OR AL.	GROOVE 'B' STRANDED COMPRESSED	GROOVE 'B' A.C.S.R.	GROOVE 'B' A.C.S.R. COMPRESSSED	H	L	LL	W	DIE INDEX	INSTALLATION DATA HYTOOL™(# OF CRIMPS) MD6 DIE INSERT		HYTOOL™(# OF CRIMPS) Y35 DIE SET	
YP2U3 <2 <7	1	6,4,3,2	6,4,3	6,4,3,2	6,4	6,4,3	6,4,3,2	6,4,3	6,4,3,2	6,4	6,4,3	1.30	1.50	2.50	.72	0	W-0		U-0	
YP26AU2 <6 <7	1	1,1/0,2/0,3/0	2,1,1/0,2/0	2,1,1/0,2/0	3,2,1,1/0	2,1,1/0,2/0	6,4,3,2,1,1/0	6,4,3,2,1	6,4,3,2,1	6,4,3,2	6,4,3,2,1									
YP25U25 <3 <4 <7	2	2/0,3/0	1,1/0,2/0	1/0,2/0	1,1/0	1/0,2/0	2/0,3/0	1,1/0,2/0	1/0,2/0	1,1/0	1/0,2/0									
YP27AU4 <7	2	2/0,3/0,4/0	1/0,2/0,3/0	2/0,3/0	1/0,2/0	1/0,2/0,3/0	6,4,3,2	6,4,3	6,4,3	6,4	6,4,3			2.69	.97			4		1
YP27AU2 <7	2	2/0,3/0,4/0	1/0,2/0,3/0	2/0,3/0	1/0,2/0	1/0,2/0,3/0	2/0,1/0	4,3,2,1	3,2,1	4,3,2	4,3,2,1									
YP27AU26 <7	2	3/0,4/0	2/0,3/0	3/0	2/0	2/0,3/0	2/0,3/0	1/0,2/0	1/0,2/0,3/0	1,1/0,2/0	1/0,2/0	1.70	1.69				NONE REQUIRED		U-D3	
YPC28U4 <7	3	---	3/0,4/0	4/0,250,266.8	3/0,4/0	4/0,266.8(18-1)	6,4,3,2	6,4,3	6,4,3	6,4	6,4,3			---	1.06	D3				
YP28U2 <4 <7	2	---	4/0	4/0,250,266.8	3/0,4/0	4/0,266.8(18-1)	2,1,1/0	4,3,2,1	3,2,1	4,3,2	4,3,2,1			2.69	.97					
YP28U26 <4 <7	2	---	4/0	4/0,250,266.8	3/0,4/0	4/0,266.8(18-1)	2/0,3/0	1/0,2/0	1/0,2/0,3/0	1,1/0,2/0	1/0,2/0		3.47	4.47	.97			9		
YPC28U28 <5 <7	3	4/0	3/0,4/0	4/0,250,266.8	3/0,4/0	3/0,4/0,266.8(18-1)	4/0	2/0,3/0,4/0	3/0,4/0,250,266.8	2/0,3/0,4/0	3/0,4/0,266.8(18-1)	1.98	2.75	---	.90		---	--		2
YPC28R28A	3	---	3/0,4/0	4/0,250,266.8	3/0,4/0	4/0,266.8(18-1)	---	3/0,4/0	4/0	3/0	4/0	1.70			.95					
YP26AU4	1	1,1/0,2/0,3/0	2,1,1/0,2/0	2,1,1/0,2/0	3,2,1,1/0	2,1,1/0,2/0	6,4,3,2,1,1/0	6,4,3,2,1	6,4,3,2,1	6,4,3,2	6,4,3,2,1	1.30	1.50	2.50	.72	0	W-0	4	U-0	1
YP26AU2G3	1	1/0	2,1/0	2/0	2,1/0	---	1/0	2	---	2	---									

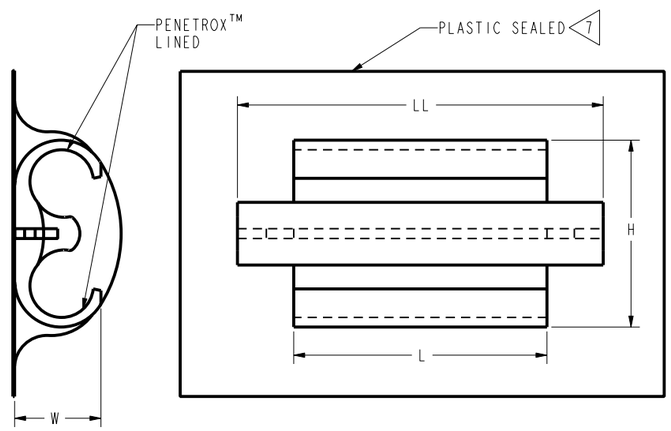

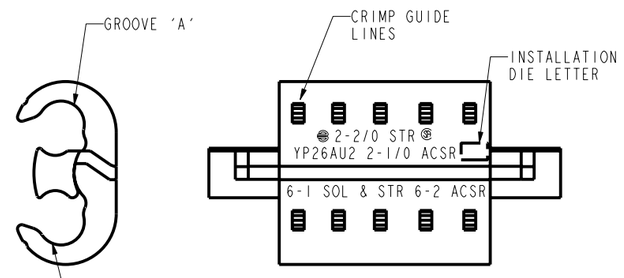

FIG-1
TYPICAL LETTERING

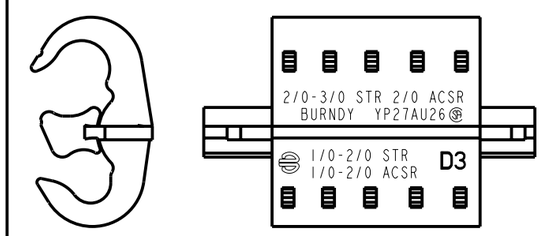

FIG-2
TYPICAL LETTERING

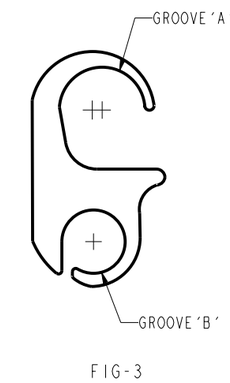

FIG-3

NOTES:

1. FOR CONDUCTOR COMBINATIONS OF ALUM.TO ALUM. OR ALUM.TO COPPER.
2. TAKES UP TO #2 ACSR MAX. IN EITHER GROOVE IF OTHER WIRE CONTAINS #2 SOL.OR SMALLER.
3. TAKES DOWN TO #2 ACSR MIN.IN EITHER GROOVE IF OTHER GROOVE WIRE IS 1/0 STR.OR LARGER.
4. IT IS RECOMMENDED THAT THE FIRST CRIMP BE MADE IN THE CENTER OF THE YP25U25, YP28U2 & YPC28U26. STAMPED LETTERING ON BODY OF CONNECTOR INDICATES THIS PROCEDURE.
5. 2/0 STR.CU.AL. AND 2/0 ACSR MAY ALSO BE INSTALLED IN GROOVE 'A' OF THE YPC28U28 WHEN GROOVE 'B' CONDUCTOR IS 3/0 STR. OR LARGER.
6. CAN ALSO ACCOMMODATE 5/16-7/16 STEEL IN GROOVE 'A' AND 1/4-5/16 STEEL IN GROOVE 'B'.
7. VAC FORM PACKAGED OR SEALED IN POLYETHYLENE BAG.
8. INSTALLATION NOTES:
   - (A) CLEAN RUN & TAP CONDUCTORS WHETHER COPPER OR ALUMINUM, WITH WIRE BRUSH OR ABRASIVE CLOTH BEFORE INSTALLING CABELOK™ CRIMPIT™.
   - (B) IF RUN CONDUCTOR IS COPPER INSTALL CONNECTOR SO THAT THE TAP WILL BE ABOVE RUN.
   - (C) THE CABELOK™ HAS A BENDABLE SPACER FOR HOLDING CONDUCTORS IN PLACE PRIOR TO CRIMPING.

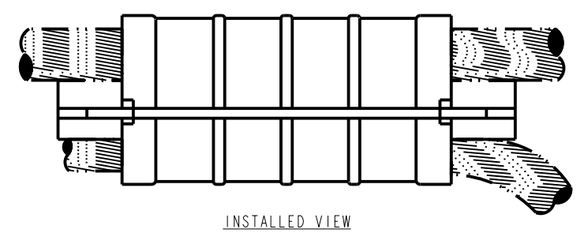

INSTALLED VIEW

MATERIAL: ALUMINUM

REFERENCE: FD045359, FD045313, XC061334
XD061496, XD061654 & FC041067

TO ORDER BURNDY® PRODUCTS CALL

UNITED STATES
1-800-346-4175 (LONDONDERRY, NH)

CANADA:
1-800-361-6975 (QUEBEC)
1-800-387-6487 (ALL OTHER PROVINCES)

FOR PRODUCT INFO: http://www.burndy.com

REV	DATE	DESCRIPTION	ECO	BY	C'H'K.
D	1/1/2001 12:00:00 AM	REDRAW IN PROE --	19224	BSB	BSK

CABELOK™ CRIMPIT™

ITEM NO:	160398	
CAT. NO:	YP-AU,YP-U,YC-U,YPC-U (TABLE)	
DRAWN BY:	RHS	01/31/64
CHECKER:	MTM	02/24/64
DSN APPVL:	MG	02/29/64
MFG APPVL:	--	--
QA APPVL:	--	--
MKT APPVL:	--	--
PROD FAM:	O.H.BARE CONNECTORS	
PROJECT #:	--	
DOCUMENT TYPE:	Sales	
REL LEVEL:	Released	
SIZE	D	
DRAWING NO	SD045569-01	
SHEET 1 OF 1		
REV	D	
SCALE:	7:4	

REV: PE0200