



DRIVE HEADS





CATALOG NUMBER	THREAD PROFILE	NOMINAL DIAMETER "D"
CTDH58	5/8-11	5/8





CATALOG NUMBER	NOMINAL DIAMETER "D"
CDH58	5/8
CDH34	3/4

COUPLERS

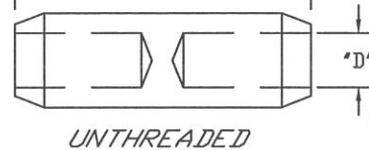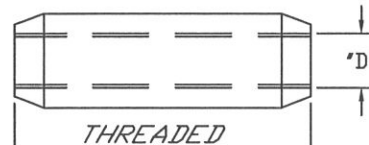

CATALOG NUMBER	NOMINAL DIAMETER "D"	THREAD PROFILE
CCC58	5/8	---
CCC34	3/4	---
CTC58	5/8	5/8-11

GROUND RODS

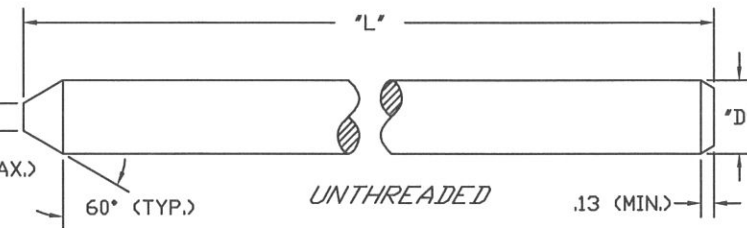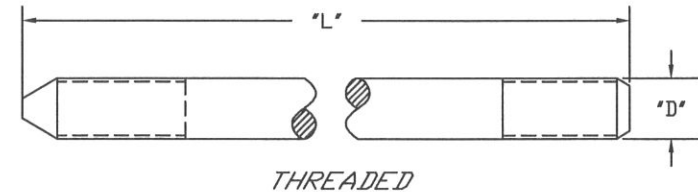

CATALOG NUMBER	LENGTH "L"	NOMINAL DIAMETER "D"	THREAD PROFILE	"A"
C635883	8 FT.	5/8"	5/8-11	3/16"
C613483	8 FT.	3/4"	---	1/4"
C615883	8 FT.	5/8"	---	3/16"
C615803	10 FT.	5/8"	---	3/16"
C613403	10 FT.	3/4"	---	1/4"

==NOTES==

- ALL GROUND RODS AND COUPLERS MEET ANSI/NEMA 6R1, EXCEPT THE MINIMUM COPPER THICKNESS IS .013.
- MATERIAL: CORE-STEEL, PLATING-COPPER.
- CATALOG NUMBER C615803 STAMPED WITH CSA LOGO.

CHANCE TOLERANCE CHART EC 29746

CONFIDENTIAL: THIS DRAWING AND ITS CONTENTS ARE CONFIDENTIAL AND THE EXCLUSIVE PROPERTY OF HUBBELL POWER SYSTEMS. NO PUBLICATION, DISTRIBUTION OR COPIES MAY BE MADE WITHOUT THE WRITTEN CONSENT OF HUBBELL POWER SYSTEMS. HUBBELL POWER SYSTEMS UNPUBLISHED ALL RIGHTS RESERVED UNDER THE COPYRIGHT LAWS.



HUBBELL POWER SYSTEMS

TITLE 13 MIL CU THICKNESS
GROUND RODS

SIZE	DWG NO.	CAT / PART / ASSY NO.	REV
SB	SA635883	SEE CHARTS	B
DO NOT SCALE THIS DRAWING	DRN BY JOBE	DATE 03/07/03	SHEET 01 OF 01