

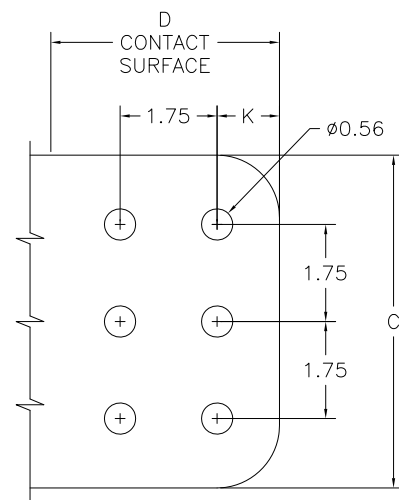


FIG. 3

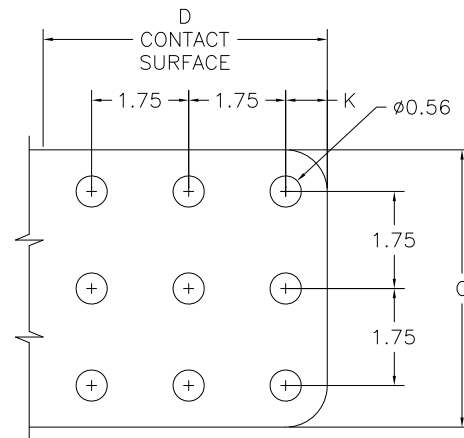


FIG. 4

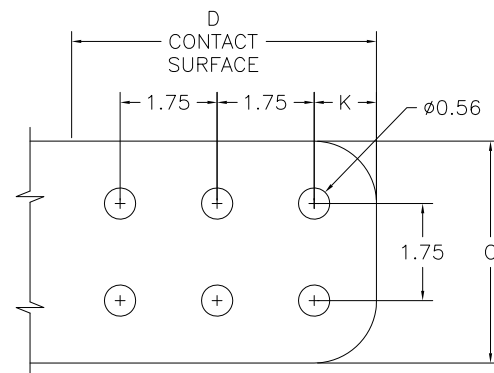


FIG. 5

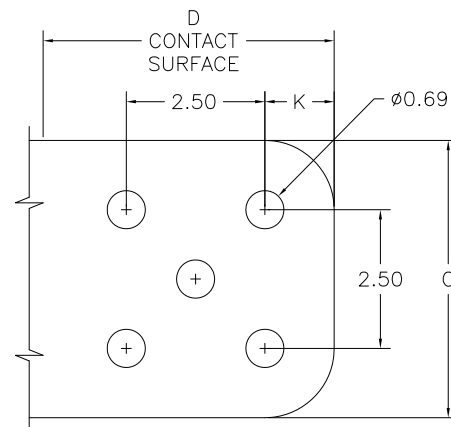


FIG. 6

NOTES:

1. MATERIAL: 356-T6 ALUMINUM ALLOY
2. DIMENSION IN INCHES.
3. CONNECTORS ARE AVAILABLE IN CENTER FORMED (CF) AND ANGLED TONGUES (15°, 30°, 45°, 60°, AND 90°). TO ORDER ADD SUFFIX TO CATALOG NUMBER. EXAMPLE (WSTF-30-D-CF)
4. CONNECTORS ARE PROVIDED WITH CLEARANCE TO RIB FOR STANDARD 1 1/16" DIA. WASHERS. CLEARANCE FOR LARGER WASHERS UP TO AND INCLUDING 1 5/8" DIA. WILL BE PROVIDED FOR BY THE ADDITION OF "BVW" TO CATALOG NUMBER. EXAMPLE (WSTF-20-D-BVW)
5. IF TONGUE IS FINISHED ON BOTH SIDES, RIB IS PARTIALLY REMOVED. EXAMPLE (WSTF-20-B2-XY)
6. SOME CONNECTORS WILL BE FURNISHED WITH SHARP CORNERS ON TONGUE.
7. OTHER DRILLING CONFIGURATIONS ARE AVAILABLE UPON REQUEST.
8. "WTR" SUFFIX DENOTED CONNECTOR WITH TWO RIBS.
9. "LDL" DENOTES CONNECTORS WITHOUT RIBS.
10. IF "XY" IS INSERTED INTO THE CATALOG NUMBER IN THE TABLE, IT REPRESENTS THE DIMENSIONS FOR A CONNECTOR FINISHED ON THE X CONTACT SURFACE "X", THE Y CONTACT SURFACE "Y", AND BOTH SURFACES "XY".




FIG. 2

SEE NOTE #4



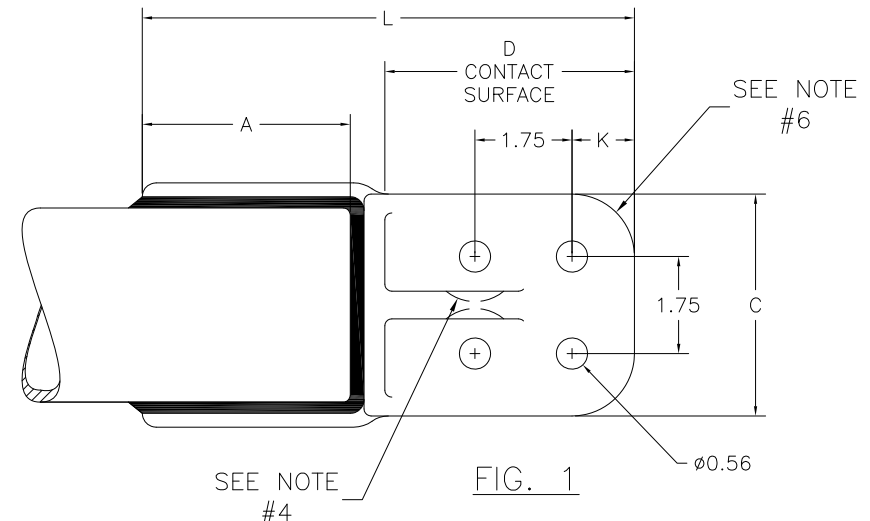


FIG. 1

SEE NOTE #4

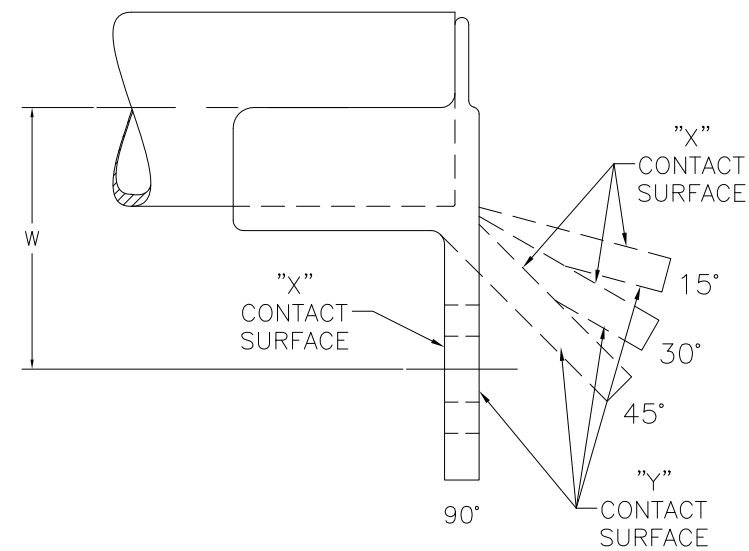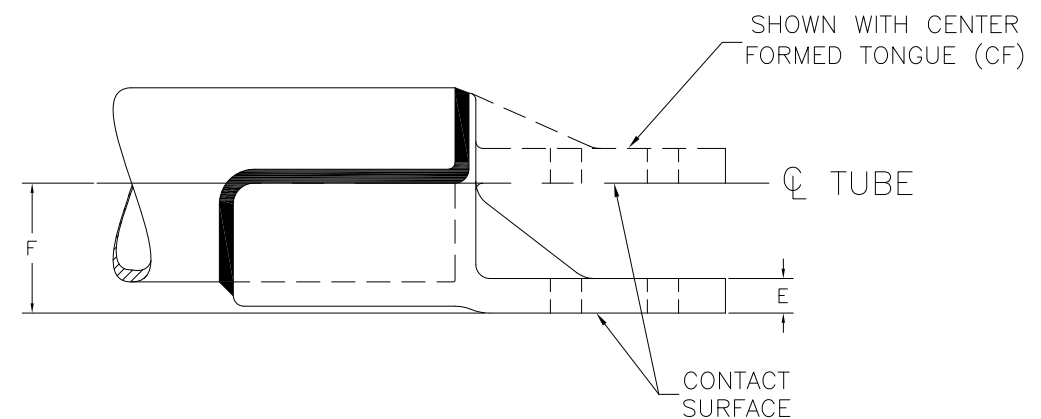

68009	1/11/2017	HG	HG
EC #	DATE	CHG BY	RESP ENG
DESC OF DWG: ADD PART NUMBER WSTF10CY45 TO TABLE ADD PART NUMBER WSTF12CY45 TO TABLE -- REASON (S) FOR CHANGE: -- DISPOSITION OF MAT'L: --			
ANDERSON HUBBELL POWER SYSTEMS CONFIDENTIAL: THIS DRAWING AND ITS CONTENTS ARE CONFIDENTIAL AND THE EXCLUSIVE PROPERTY OF HUBBELL POWER SYSTEMS. NO PUBLICATION, DISTRIBUTION OR COPIES MAY BE MADE WITHOUT THE WRITTEN CONSENT OF HUBBELL POWER SYSTEMS. HUBBELL POWER SYSTEMS UNPUBLISHED ALL RIGHTS RESERVED UNDER THE COPYRIGHT LAWS. TITLE WELDED ALUMINUM TERMINAL TUBE TO FLAT SIZE DWG NO. CAT / PART / ASSY NO. REV C C-1291 SEE TABLE 61 DO NOT SCALE THIS DRAWING DRN BY WS DATE 11/7/56 SHEET 1 of 6			

CATALOG NUMBER	IPS SIZE	FIG.	A	C	D	E	F	K	L	W
WSTF-06-B2	0.750	2	2.500	2.000	3.250	0.375	1.500	0.625	6.000	--
WSTF-06-B2-X/Y-30	0.750	2	1.250	2.000	3.250	0.375	--	0.625	4.688	--
WSTF-06-B2-X/Y-45	0.750	2	2.500	2.000	3.250	0.375	--	0.625	--	--
WSTF-06-B2-Y-90	0.750	2	2.500	2.000	3.250	0.375	--	0.625	--	2.813
WSTF-06-C	0.750	1	2.500	3.000	3.250	0.375	1.500	0.625	6.000	--
WSTF-06-C-CF	0.750	1	2.500	3.000	3.250	0.375	--	0.625	6.250	--
WSTF-10-B	1.000	2	2.750	1.500	3.250	0.375	1.188	0.625	6.250	--
WSTF-10-B2	1.000	2	2.750	2.000	3.250	0.375	1.188	0.625	6.250	--
WSTF-10-B2-CF	1.000	2	2.750	2.000	3.250	0.375	--	0.625	6.875	--
WSTF-10-B2-X/Y-15	1.000	2	2.750	2.000	3.250	0.375	--	0.625	--	--
WSTF-10-B2-X/Y-30	1.000	2	1.250	2.000	3.250	0.375	--	0.625	4.625	--
WSTF-10-B2-X/Y-45	1.000	2	2.750	2.000	3.250	0.375	--	0.625	--	--
WSTF-10-B2-Y-90	1.000	2	2.750	2.000	3.250	0.375	--	0.625	--	3.313
WSTF-10-C	1.000	1	2.750	3.000	3.250	0.375	1.188	0.625	6.125	--
WSTF-10-C-CF	1.000	1	4.250	3.000	3.250	0.375	--	0.625	6.875	--
WSTF-10-C-X/Y-45	1.000	1	3.000	3.000	3.250	0.375	--	0.625	6.250	--
WSTF-10-C-Y-90	1.000	1	2.750	3.000	3.250	0.375	--	0.625	--	3.313
WSTF-10-E	1.000	4	2.750	5.000	5.250	0.500	--	0.750	8.250	--
WSTF-12-B2	1.250	2	3.000	2.000	3.250	0.375	1.375	0.625	6.625	--
WSTF-12-B2-LPL	1.250	2	3.000	2.000	3.250	0.375	1.375	0.625	6.625	--
WSTF-12-B2-X/Y-15	1.250	2	1.750	2.000	3.250	0.375	--	0.625	5.750	--
WSTF-12-B2-Y-90	1.250	2	3.000	2.000	3.250	0.375	--	0.625	--	3.250
WSTF-12-C	1.250	1	3.000	3.000	3.250	0.375	1.375	0.625	6.375	--
WSTF-12-C-CF	1.250	1	3.000	3.000	3.250	0.375	--	0.625	6.750	--
WSTF-12-C-X/Y-45	1.250	1	3.000	3.000	3.250	0.375	--	0.625	6.250	--
WSTF-12-C-Y-90	1.250	1	3.000	3.000	3.000	0.375	--	0.625	--	3.000
WSTF-12-D	1.250	1	3.000	4.000	4.250	0.375	1.375	1.125	7.625	--
WSTF-12-D-LPL	1.250	1	3.000	4.000	4.250	0.375	1.375	1.125	7.625	--
WSTF-12-D-X/Y-90	1.250	1	3.000	4.000	4.250	0.375	--	1.125	--	--
WSTF-14-B2	1.500	2	3.250	2.000	3.250	0.438	1.500	0.625	6.750	--
WSTF-14-B2-CF	1.500	2	3.250	2.000	3.250	0.438	--	0.625	7.188	--
WSTF-14-B2-X/Y-45	1.500	2	3.250	2.000	3.250	0.375	--	0.625	--	--
WSTF-14-B2-Y-90	1.500	2	3.375	2.000	3.250	0.375	--	0.625	--	3.625
WSTF-14-C	1.500	1	3.250	3.000	3.250	0.375	1.500	0.625	6.750	--
WSTF-14-C-CF	1.500	1	3.250	3.000	3.250	0.375	--	0.625	7.375	--

68009	1/11/2017	HG	HG				
EC #	DATE	CHG BY	RESP ENG				
DESC OF DWG: SEE PAGE 1. --- --- --- REASON (S) FOR CHANGE: -- DISPOSITION OF MAT'L: --				ANDERSON®	 HUBBELL® POWER SYSTEMS		
CONFIDENTIAL: THIS DRAWING AND ITS CONTENTS ARE CONFIDENTIAL AND THE EXCLUSIVE PROPERTY OF HUBBELL POWER SYSTEMS. NO PUBLICATION, DISTRIBUTION OR COPIES MAY BE MADE WITHOUT THE WRITTEN CONSENT OF HUBBELL POWER SYSTEMS. HUBBELL POWER SYSTEMS UNPUBLISHED ALL RIGHTS RESERVED UNDER THE COPYRIGHT LAWS.				TITLE WELDED ALUMINUM TERMINAL TUBE TO FLAT			
				SIZE C	DWG NO. C-1291	CAT / PART / ASSY NO. SEE TABLE	REV 61
DO NOT SCALE THIS DRAWING		DRN BY WS		DATE 11/7/56		SHEET 2 of 6	

CATALOG NUMBER	IPS SIZE	FIG.	A	C	D	E	F	K	L	W
WSTF-14-C-X/Y-30	1.500	1	3.250	3.000	3.250	0.375	--	0.625	--	--
WSTF-14-C-X/Y-45	1.500	1	3.250	3.000	3.250	0.375	--	0.625	--	--
WSTF-14-C-Y-90	1.500	1	3.250	3.000	3.250	0.375	--	1.125	--	3.125
WSTF-14-D	1.500	1	2.563	4.000	4.250	0.375	1.469	1.125	6.938	--
WSTF-14-D-Y-90	1.500	1	3.250	4.000	4.250	0.375	--	1.125	--	3.563
WSTF-20-B2	2.000	2	3.500	2.000	3.250	0.438	1.750	0.625	7.125	--
WSTF-20-B2-CF	2.000	2	3.500	2.000	3.250	0.438	--	0.625	7.125	--
WSTF-20-B2-X/Y-15	2.000	2	3.500	2.000	3.250	0.438	--	0.625	7.688	--
WSTF-20-B2-X/Y-30	2.000	2	3.500	2.000	3.250	0.438	--	0.625	--	--
WSTF-20-B2-X/Y-60	2.000	2	3.500	2.000	3.250	0.438	--	0.625	5.875	--
WSTF-20-B2-Y-90	2.000	2	3.500	2.000	3.250	0.375	--	0.625	--	3.750
WSTF-20-C	2.000	1	1.750	3.000	3.250	0.375	1.750	0.625	5.500	--
WSTF-20-C-X/Y-45	2.000	1	1.750	3.000	3.250	0.375	--	0.625	--	--
WSTF-20-C-CF	2.000	1	3.500	3.000	3.250	0.375	--	0.625	7.375	--
WSTF-20-C-Y-90	2.000	1	3.500	3.000	3.250	0.375	--	0.625	--	4.000
WSTF-20-D	2.000	1	3.500	4.000	4.250	0.500	1.750	1.125	7.875	--
WSTF-20-D-CF	2.000	1	3.500	4.000	4.250	0.500	--	1.125	8.375	--
WSTF-20-D-X/Y-45	2.000	1	3.500	4.000	4.250	0.375	--	1.125	--	--
WSTF-20-D-Y-90	2.000	1	3.500	4.000	4.250	0.375	--	1.125	--	4.500
WSTF-24-B2	2.500	2	3.750	2.000	3.250	0.563	2.000	0.625	7.500	--
WSTF-24-B2-X/Y-60	2.500	2	3.750	2.000	3.250	0.563	--	0.625	--	--
WSTF-24-B2-Y-90	2.500	2	3.750	2.000	3.250	0.625	--	0.625	--	3.875
WSTF-24-C	2.500	1	3.750	3.000	3.250	0.563	2.000	0.625	7.500	--
WSTF-24-C-CF	2.500	1	3.750	3.000	3.250	0.563	--	0.625	7.500	--
WSTF-24-C-X/Y-15	2.500	1	3.750	3.000	3.250	0.563	--	0.625	--	--
WSTF-24-C-X/Y-30	2.500	1	3.750	3.000	3.250	0.563	--	0.625	--	--
WSTF-24-C-X/Y-60	2.500	1	3.750	3.000	3.250	0.563	--	0.625	--	--
WSTF-24-C-Y-90	2.500	1	3.750	3.000	3.250	0.563	--	0.625	--	3.625
WSTF-24-D	2.500	1	3.750	4.000	4.250	0.500	2.000	1.125	8.250	--
WSTF-24-D-CF	2.500	1	3.750	4.000	4.250	0.500	--	1.125	8.500	--
WSTF-24-D-X/Y-CF	2.500	1	3.750	4.000	4.250	0.500	--	1.125	8.500	--
WSTF-24-D-X/Y-15	2.500	1	3.750	4.000	4.250	0.500	--	1.125	--	--
WSTF-24-D-X/Y-30	2.500	1	3.750	4.000	4.250	0.500	--	1.125	--	--

68009	1/11/2017	HG	HG						
EC #	DATE	CHG BY	RESP ENG						
DESC OF DWG: SEE PAGE 1. --- --- --- REASON (S) FOR CHANGE: -- DISPOSITION OF MAT'L: --				ANDERSON®	 HUBBELL® POWER SYSTEMS				
CONFIDENTIAL: THIS DRAWING AND ITS CONTENTS ARE CONFIDENTIAL AND THE EXCLUSIVE PROPERTY OF HUBBELL POWER SYSTEMS. NO PUBLICATION, DISTRIBUTION OR COPIES MAY BE MADE WITHOUT THE WRITTEN CONSENT OF HUBBELL POWER SYSTEMS. UNPUBLISHED ALL RIGHTS RESERVED UNDER THE COPYRIGHT LAWS.					TITLE WELDED ALUMINUM TERMINAL TUBE TO FLAT				
					SIZE C	DWG NO. C-1291	CAT / PART / ASSY NO. SEE TABLE		REV 61
DO NOT SCALE THIS DRAWING		DRN BY WS		DATE 11/7/56		SHEET 3 of 6			

CATALOG NUMBER	IPS SIZE	FIG.	A	C	D	E	F	K	L	W
WSTF-24-D-X/Y-45	2.500	1	3.750	4.000	4.250	0.500	--	1.125	--	--
WSTF-24-D-Y-90	2.500	1	3.750	4.000	4.250	0.500	--	1.125	--	4.375
WSTF-30-B2	3.000	2	4.000	2.000	3.250	0.688	2.375	0.625	7.813	--
WSTF-30-B2-X/Y-15	3.000	2	4.000	2.000	3.250	0.688	--	0.625	--	--
WSTF-30-B2-X/Y-45	3.000	2	4.000	2.000	3.250	0.688	--	0.625	--	--
WSTF-30-B2-Y-90	3.000	2	4.000	2.000	3.250	0.688	--	0.625	--	4.250
WSTF-30-C	3.000	1	2.500	3.000	3.250	0.625	2.375	0.625	6.313	--
WSTF-30-C-CF	3.000	1	4.000	3.000	3.250	0.625	--	0.625	7.875	--
WSTF-30-C-X/Y-15	3.000	1	4.000	3.000	3.250	0.625	--	0.625	7.938	--
WSTF-30-C-X/Y-30	3.000	1	4.000	3.000	3.250	0.625	--	0.625	7.688	--
WSTF-30-C-X/Y-60	3.000	1	4.000	3.000	3.250	0.625	--	0.625	--	--
WSTF-30-C-Y-90	3.000	1	4.000	3.000	3.250	0.625	--	0.625	--	4.000
WSTF-30-D	3.000	1	4.000	4.000	4.250	0.625	2.375	1.125	8.938	--
WSTF-30-D-CF	3.000	1	4.000	4.000	4.250	0.625	--	1.125	8.875	--
WSTF-30-D-X/Y-CF	3.000	1	1.750	4.000	4.125	0.625	--	1.125	6.625	--
WSTF-30-D-DE	3.000	1	4.000	4.000	4.250	0.625	1.875	1.125	8.375	--
WSTF-30-D-WTR	3.000	1	4.000	4.000	4.250	0.625	2.343	1.125	8.750	--
WSTF-30-DL-CF	3.000	5	2.500	4.000	6.125	0.625	--	1.125	9.250	--
WSTF-30-D-X/Y-45	3.000	1	4.000	4.000	4.250	0.625	--	1.125	--	--
WSTF-30-D-X/Y-60	3.000	1	1.750	4.000	4.125	0.625	--	1.125	--	--
WSTF-30-D-X/Y-75	3.000	1	4.000	4.000	4.250	0.625	--	1.125	--	--
WSTF-30-D-Y-90	3.000	1	4.000	4.000	4.250	0.625	--	1.125	--	4.719
WSTF-30-N-CF	3.000	3	2.500	6.000	4.125	0.500	--	1.125	7.250	--
WSTF-34-B-CF	3.500	2	4.250	1.500	3.250	0.750	--	0.625	8.063	--
WSTF-34-B2	3.500	2	4.250	2.000	3.375	0.688	2.594	0.625	8.000	--
WSTF-34-B2-CF	3.500	2	4.250	2.000	3.250	0.688	--	0.625	8.063	--
WSTF-34-B2-Y-90	3.500	2	1.750	2.000	3.250	0.688	--	0.625	--	4.250
WSTF-34-C	3.500	1	4.250	3.000	3.250	0.625	2.625	0.625	7.750	--
WSTF-34-C-CF	3.500	1	4.250	3.000	3.250	0.625	--	0.625	8.438	--
WSTF-34-C-X/Y-45	3.500	1	4.250	3.000	3.250	0.625	--	0.625	--	--
WSTF-34-C-Y-90	3.500	1	4.250	3.000	3.250	0.625	--	1.125	--	4.250
WSTF-34-D	3.500	1	4.250	4.000	4.250	0.625	2.625	1.125	8.750	--
WSTF-34-D-LPL	3.500	1	4.250	4.000	4.250	0.625	3.000	1.125	9.000	--

68009	1/11/2017	HG	HG				
EC #	DATE	CHG BY	RESP ENG				
DESC OF DWG: SEE PAGE 1. --- --- --- REASON (S) FOR CHANGE: -- DISPOSITION OF MAT'L: --				ANDERSON®	 HUBBELL® POWER SYSTEMS		
CONFIDENTIAL: THIS DRAWING AND ITS CONTENTS ARE CONFIDENTIAL AND THE EXCLUSIVE PROPERTY OF HUBBELL POWER SYSTEMS. NO PUBLICATION, DISTRIBUTION OR COPIES MAY BE MADE WITHOUT THE WRITTEN CONSENT OF HUBBELL POWER SYSTEMS. HUBBELL POWER SYSTEMS UNPUBLISHED ALL RIGHTS RESERVED UNDER THE COPYRIGHT LAWS.				TITLE WELDED ALUMINUM TERMINAL TUBE TO FLAT			
				SIZE C	DWG NO. C-1291	CAT / PART / ASSY NO. SEE TABLE	REV 61
DO NOT SCALE THIS DRAWING		DRN BY WS		DATE 11/7/56		SHEET 4 of 6	

CATALOG NUMBER	IPS SIZE	FIG.	A	C	D	E	F	K	L	W
WSTF-34-D-CF	3.500	1	4.250	4.000	4.250	0.625	--	1.125	9.125	--
WSTF-34-D-CF-CE1	3.500	1	4.250	4.000	4.250	0.750	--	1.125	8.750	--
WSTF-34-D-CF-X/Y-CE1	3.500	1	4.250	4.000	4.250	0.875	--	1.125	8.750	--
WSTF-34-D-CF-NM	3.500	1	4.250	4.000	4.250	0.625	--	1.125	9.125	--
WSTF-34-D-X/Y-30	3.500	1	4.250	4.000	4.250	0.625	--	1.125	--	--
WSTF-34-D-X/Y-45	3.500	1	4.250	4.000	4.250	0.625	--	1.125	--	--
WSTF-34-D-Y-90	3.500	1	4.250	4.000	4.250	0.625	--	1.125	--	4.750
WSTF-40-B2	4.000	2	4.250	2.000	3.625	1.000	2.844	0.625	8.125	--
WSTF-40-B2-CF	4.000	2	4.250	2.000	3.250	1.000	--	0.625	8.188	--
WSTF-40-B2-X/Y-75	4.000	2	4.250	2.000	3.250	1.000	--	0.625	--	--
WSTF-40-B2-X/Y-90	4.000	2	4.250	2.000	3.250	1.000	--	0.625	--	5.125
WSTF-40-C	4.000	1	4.250	3.000	3.250	0.750	2.844	0.625	7.938	--
WSTF-40-C-CF	4.000	1	4.250	3.000	3.250	0.750	--	0.625	8.250	--
WSTF-40-C-X/Y-60	4.000	1	4.250	3.000	3.250	0.750	--	0.625	--	--
WSTF-40-C-Y-90	4.000	1	4.250	3.000	3.250	0.750	--	0.625	--	5.125
WSTF-40-D	4.000	1	3.000	4.000	4.250	0.750	2.875	1.125	7.750	--
WSTF-40-D-LPL	4.000	1	4.250	4.000	4.250	0.750	2.844	1.125	9.000	--
WSTF-40-D-CF	4.000	1	3.000	4.000	4.250	0.750	--	1.125	7.938	--
WSTF-40-D-X/Y-CF	4.000	1	4.250	4.000	4.250	0.750	--	1.125	9.250	--
WSTF-40-D-4.75	4.000	1	4.250	4.000	4.250	0.750	4.750	1.125	9.188	--
WSTF-40-D-Y-90	4.000	1	4.250	4.000	4.250	0.750	--	1.125	5.625	--
WSTF-40-K	4.000	6	4.250	5.000	5.250	0.750	2.844	1.125	10.000	--
WSTF-44-C-CF	4.500	1	4.250	3.000	3.250	0.750	--	0.625	8.000	--
WSTF-44-D	4.500	1	4.250	4.000	4.250	0.750	3.500	1.125	9.000	--
WSTF-44-E	4.500	4	4.500	5.000	5.250	0.750	3.500	0.750	10.500	--
WSTF-50-C	5.000	1	3.000	3.000	3.250	0.750	3.375	0.625	6.875	--
WSTF-50-C-CF	5.000	1	4.250	3.000	3.250	0.750	--	0.625	8.250	--
WSTF-50-C-X/Y-60	5.000	1	4.250	3.000	3.250	0.750	--	0.625	--	--
WSTF-50-C-Y-90	5.000	1	4.250	3.000	3.250	0.750	--	0.625	--	5.750
WSTF-50-D	5.000	1	3.000	4.000	4.250	0.750	3.625	1.125	7.750	--
WSTF-50-D-X/Y	5.000	1	4.250	4.000	4.250	0.750	3.250	1.125	9.000	--
WSTF-50-D-CF	5.000	1	3.000	4.000	4.250	0.750	--	1.125	8.000	--
WSTF-50-D-X/Y-CF	5.000	1	3.000	4.000	4.250	0.750	--	1.125	8.000	--

68009	1/11/2017	HG	HG
EC #	DATE	CHG BY	RESP ENG
DESC OF DWG: SEE PAGE 1. --- --- REASON (S) FOR CHANGE: -- DISPOSITION OF MAT'L: --			
ANDERSON®		HUBBELL® POWER SYSTEMS	
CONFIDENTIAL: THIS DRAWING AND ITS CONTENTS ARE CONFIDENTIAL AND THE EXCLUSIVE PROPERTY OF HUBBELL POWER SYSTEMS. NO PUBLICATION, DISTRIBUTION OR COPIES MAY BE MADE WITHOUT THE WRITTEN CONSENT OF HUBBELL POWER SYSTEMS. HUBBELL POWER SYSTEMS UNPUBLISHED ALL RIGHTS RESERVED UNDER THE COPYRIGHT LAWS.		TITLE WELDED ALUMINUM TERMINAL TUBE TO FLAT	
SIZE C	DWG NO. C-1291	CAT / PART / ASSY NO. SEE TABLE	REV 61
DO NOT SCALE THIS DRAWING	DRN BY WS	DATE 11/7/56	SHEET 5 of 6

CATALOG NUMBER	IPS SIZE	FIG.	A	C	D	E	F	K	L	W
WSTF-50-D-X/Y-30	5.000	1	4.250	4.000	4.250	0.750	--	1.125	--	--
WSTF-50-D-X/Y-60	5.000	1	4.250	4.000	4.250	0.750	--	1.125	--	--
WSTF-50-D-Y-90	5.000	1	4.250	4.000	4.250	0.750	--	1.125	--	6.250
WSTF-50-K-UD	5.000	6	4.250	5.000	5.250	0.750	3.500	1.250	10.375	--
WSTF-60-C	6.000	1	4.250	3.000	3.250	1.188	4.000	0.625	8.625	--
WSTF-60-C-CF	6.000	1	4.250	3.000	3.250	1.000	--	0.625	8.250	--
WSTF-60-D	6.000	1	4.250	4.000	4.250	1.000	4.000	1.125	9.250	--
WSTF-60-D-CF	6.000	1	3.000	4.000	4.250	1.000	--	1.125	8.188	--
WSTF-60-D-X/Y-90	6.000	1	4.250	4.000	4.250	1.000	--	1.125	--	6.000
WSTF-60-N	6.000	3	3.000	6.000	4.250	0.750	4.000	1.125	8.250	--
WSTF-60-N-CF	6.000	3	3.000	6.000	4.250	0.750	--	1.125	8.625	--
WSTF-8-O.D.-D-CF	8.000 O.D.	1	4.000	4.000	4.250	1.500	--	1.125	9.250	--

68009	1/11/2017	HG	HG	ANDERSON®	 HUBBELL® POWER SYSTEMS			
EC #	DATE	CHG BY	RESP ENG					
DESC OF DWG: SEE PAGE 1. -- -- -- REASON (S) FOR CHANGE: -- DISPOSITION OF MAT'L: --				CONFIDENTIAL: THIS DRAWING AND ITS CONTENTS ARE CONFIDENTIAL AND THE EXCLUSIVE PROPERTY OF HUBBELL POWER SYSTEMS. NO PUBLICATION, DISTRIBUTION OR COPIES MAY BE MADE WITHOUT THE WRITTEN CONSENT OF HUBBELL POWER SYSTEMS. HUBBELL POWER SYSTEMS UNPUBLISHED ALL RIGHTS RESERVED UNDER THE COPYRIGHT LAWS.	TITLE WELDED ALUMINUM TERMINAL TUBE TO FLAT			
SIZE		DWG NO.				CAT / PART / ASSY NO.		REV
C		C-1291				SEE TABLE		61
DO NOT SCALE THIS DRAWING		DRN BY WS				DATE 11/7/56		SHEET 6 of 6