



-NOTES-

1. HOT DIP GALVANIZED PER ASTM A-153.
2. LEAD AND EXTENSION SECTION LENGTHS ARE NOMINAL, EXPECT SOME MINOR VARIANCE.
3. CLEVIS BOLTS; 1" DIAMETER X 5" LONG HEX HEAD PER SAE J429 GRADE 2.
4. MANUFACTURER TO HAVE IN EFFECT INDUSTRY RECOGNIZED WRITTEN QUALITY CONTROL FOR ALL MATERIALS AND MANUFACTURING PROCESSES.
5. ALL WELDING TO BE DONE BY WELDERS CERTIFIED UNDER SECTION 5 OF THE AWS CODE D1.1.
6. ADD USA SUFFIX TO CATALOG NUMBER FOR BUY AMERICA ITEMS. PURCHASERS OF BUY AMERICA ITEMS WILL BE PROVIDED A DATED CERTIFICATE OF COMPLIANCE TO SPECIFIC BUY AMERICA PROVISION IF REQUESTED AT THE TIME OF ORDER. CONTACT HUBBELL POWER SYSTEMS CUSTOMER SERVICE FOR DETAILS.

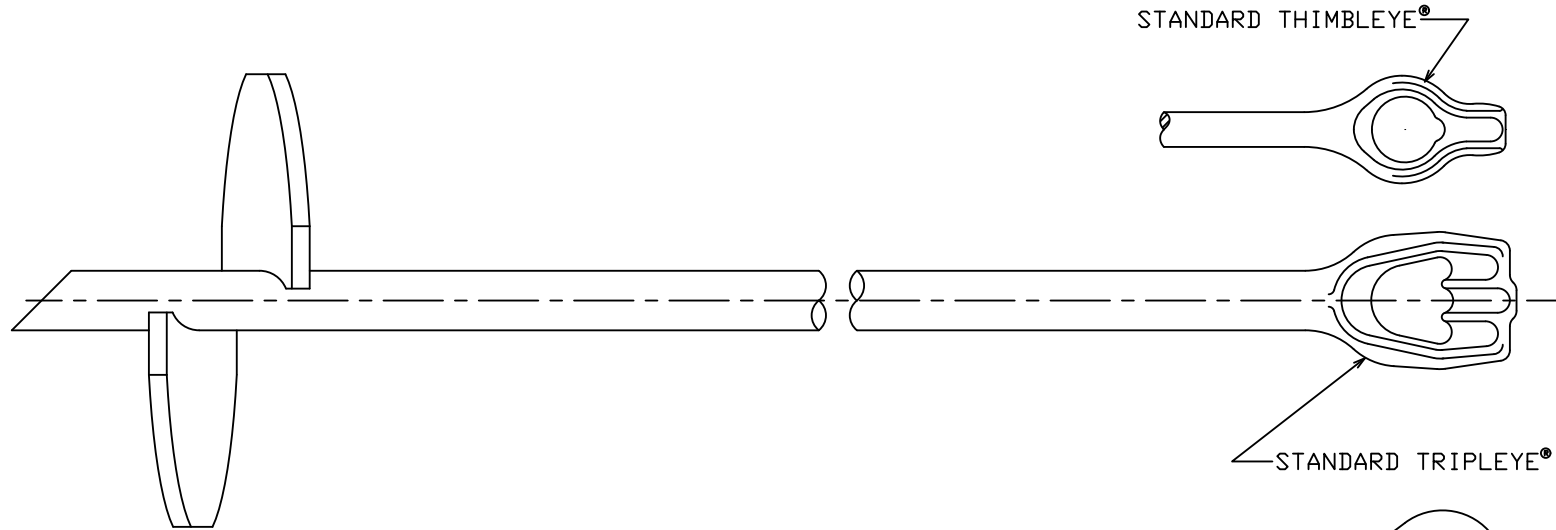

CAT. NO.	HELIX SIZE	NOMINAL ROD DIA. AND LENGTH	INSTALLATION TORQUE RATING (FT-LBS)	STD. PAK. PALLET
4345	4"	3/4" X 54'	400	1/100
6346	6"	3/4" X 66'	400	1/100
816	8"	1" X 66'	1000	1/60
10146	10"	1-1/4" X 66'	2300	1/20
10148	10"	1-1/4" X 96'	2300	1/20
12537	14"	1-1/4" X 96'	2300	1/20
15148	15"	1-1/4" X 96'	2300	1/20
402	--	1-1/4" X 72'	2300	1/50
T108-0054	8"	1" X 66'	1000	1/25

CATALOG NUMBERS 4345, 6346, AND 816 MAY BE ORDERED WITH A FORGED THIMBLEYE® ROD AND OVALEYE RATHER THAN THE STANDARD TRIPLEYE. TO ORDER A THIMBLEYE ROD SIMPLY ADD '1' TO THE SUFFIX OF THE CATALOG NUMBER. EXAMPLE: CATALOG NO. 63461. TO ORDER A OVALEYE ROD SIMPLY ADD 'OR' TO THE SUFFIX OF THE CATALOG NUMBER. EXAMPLE: CATALOG NO. 816OR.

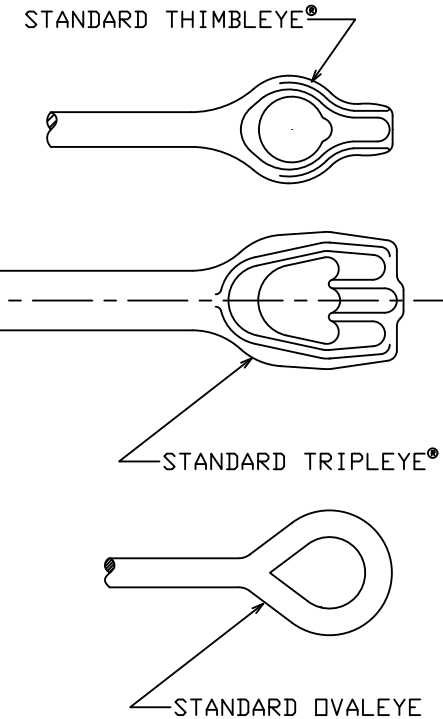

CHANCE		HUBBELL POWER SYSTEMS	
CONFIDENTIAL: THIS DRAWING AND ITS CONTENTS ARE CONFIDENTIAL AND THE EXCLUSIVE PROPERTY OF HUBBELL POWER SYSTEMS. NO PUBLICATION, DISTRIBUTION OR COPIES MAY BE MADE WITHOUT THE WRITTEN CONSENT OF HUBBELL POWER SYSTEMS. HUBBELL POWER SYSTEMS UNPUBLISHED ALL RIGHTS RESERVED UNDER THE COPYRIGHT LAWS.		TITLE NO WRENCH SCREW ANCHOR & EXTENSION SIZE C DWG NO. SA4345 DO NOT SCALE THIS DRAWING	
CAT / PART / ASSY NO. SEE CHART		REV F	
DRN BY QUALS		DATE 11/18/87 SHEET 1 OF 1	