
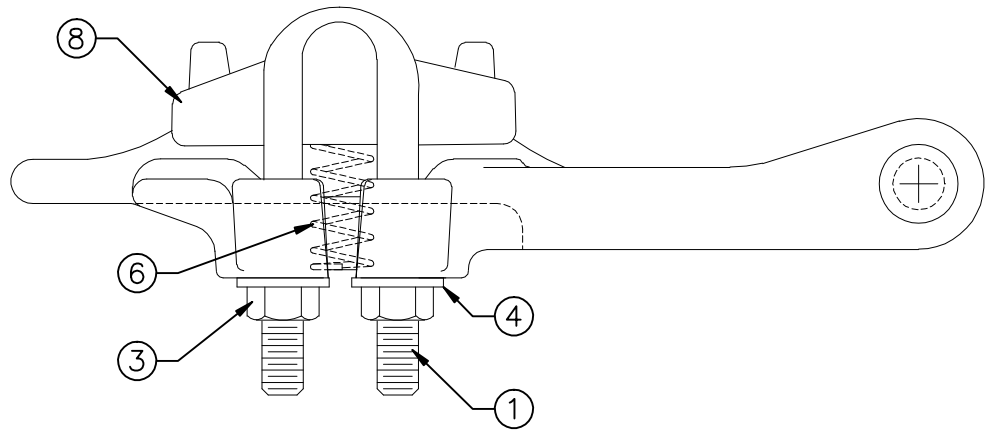
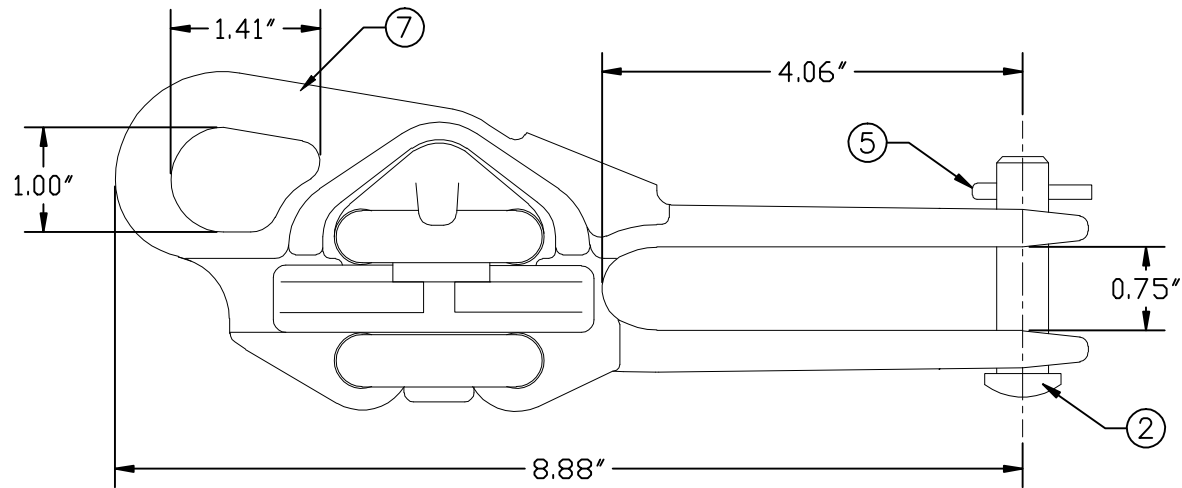


REVISIONS				
NO.	DATE	DESCRIPTION	BY	CKD

HEX PIN REPLACES CLEVIS
PIN ON HDSO-57HP



ENG. REF.

This information is confidential and is the property of Maclean Power Systems. It may not be made public or reproduced except that the Customer may make copies for use solely in installation, maintenance, and operation of products supplied by Maclean Power Systems.

ITEM NO.	PART NO.	CAT. NO.	DESCRIPTION	QUANTITY			
				A	B	C	D
1	P55991	H-0200-04	3/8" U-BOLT	2	2		
2	P56094	H-0315-03	5/8" x 2-1/16" CLEVIS PIN	1	-		
3	P56136	H-0400-03-W	3/8"-16 HEX NUT FIN	4	4		
4	P56292	H-0500-03	3/8" FLAT-WASHER	4	4		
5	P61134	M-111-3	LONG COTTER PIN	1	1		
6	P61136	H-0476-02	0.312" I.D. x 1.88" SPRING	1	1		
7	P62146	*HDSO-57-B	HDSO-57 BODY CST	1	1		
8	P62147	*HDSO-57-K	HDSO-57 KEEPER	1	1		
9	P61654	H-0320-03	5/8"ø x 2-1/8" HEX CLEVIS PIN	-	1		

ASSEMBLY NUMBER	REF. NO.
HDSO-57	A
HDSO-57HP	B
- - - - -	C
- - - - -	D

- NOTES:
1. MATERIAL – BODY AND KEEPER:
A356-T6 ALUMINUM ALLOY
- HARDWARE:
STEEL, HOT DIP GALVANIZED PER
ASTM-A153
- COTTER PIN AND COMP. SPRING:
STAINLESS STEEL
2. ULTIMATE STRENGTH – BODY: 8,000 LBS.
EYE: 5,000 LBS.
3. CLAMPING RANGE – 0.25" TO 0.57"



MACLEAN POWER SYSTEMS
A Maclean-fogg Company

HOT LINE DEAD END CLAMP
HDSO-57, HDSO-57HP

DATE: 12/08/2011SCALE: NONENO.

DWN. BY: CDRCKD. BY:APR. BY:

BC8526-1

R / 0SH. 1 OF 1