
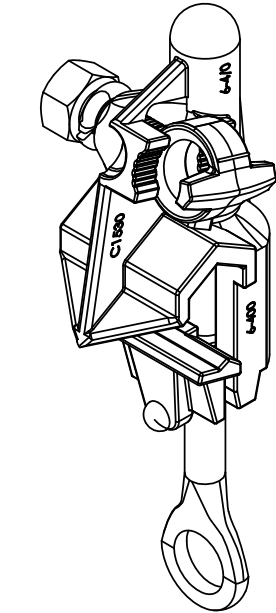
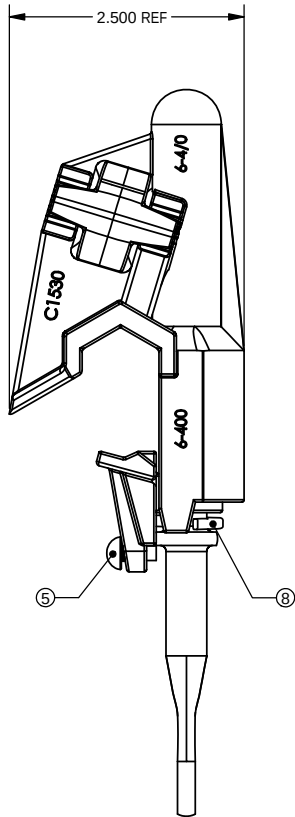


CATALOG NUMBER	CONNECTION TYPE		RUN			TAP			TAP NUT
	RUN	TAP	DIAMETER	MAX	MIN	DIAMETER	MAX	MIN	
C 1530	CU	CU	.162"-.745"	400 MCM	#6 SOL	.152"-.682"	4/0 STR	#6 SOL	3/4"

ITEM NUMBER	1	2	3	4	5	6	7	8
PART DESCRIPTION	TAP BOLT	BODY	EYESCREW	JAW	RIVET	TAP LOCKWASHER	NUT	RUN LOCKWASHER
MATERIAL	BRONZE ALLOY	BRONZE ALLOY	BRONZE ALLOY OR STAINLESS STEEL	BRONZE ALLOY	STAINLESS STEEL	STAINLESS STEEL	BRONZE ALLOY OR STAINLESS STEEL	STAINLESS STEEL

- NOTES:
- 1) RECOMMENDED TORQUE LEVELS
 RUN: 240 IN-LBS.
 TAP: 240 IN-LBS.
 - 2) STANDARD PACK: 25 PCS
 - 3) ADD SUFFIX "A" FOR ALUMINUM BODY CLAMPS
 - 4) ADD SUFFIX "-9" FOR PACKAGING WITH INHIBITOR.

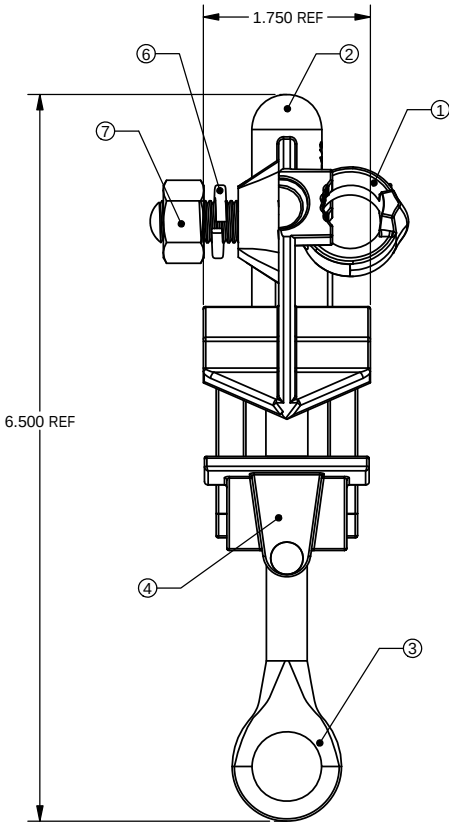

USE OR REPRODUCTION OF THIS DRAWING FOR THE PURPOSE OF MANUFACTURING THIS ARTICLE OR ARTICLES SHOWN OR ANY OTHER PURPOSE IS STRICTLY PROHIBITED EXCEPT ON WRITTEN PERMISSION **MACLEAN POWER SYSTEMS**

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN:	
INCHES	
TOLERANCES ARE:	
.XX	±
.XXX	±
X/XX	±
ANGLES	± °



MACLEAN
POWER
SYSTEMS

RELIABLE POWER PRODUCTS
 11411 ADDISON STREET
 FRANKLIN PARK, IL. 60131
 TEL. (847) 455-0014 FAX: (847) 455-0029

DRAWING NUMBER: GD-C1530		DO NOT SCALE DRAWING	
SHEET NAME: F-041700	1 OF 1	CAD GENERATED DRAWING DO NOT MANUALLY UPDATE	
DRAWING DESCRIPTION: GENERAL DIMENSION DRAWING C1530 HOT LINE CLAMP ASSEMBLY		DESIGN DATE: 05-15-12	
		DRAWN BY:	MRM
		ENGINEER	MRM
		APPROVED	JBB
DRAWING SCALE: 1:2			