

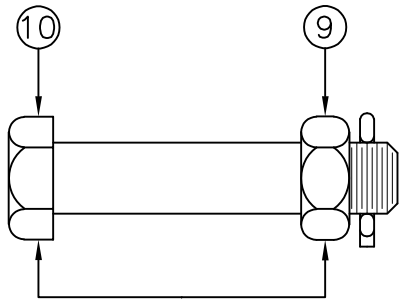
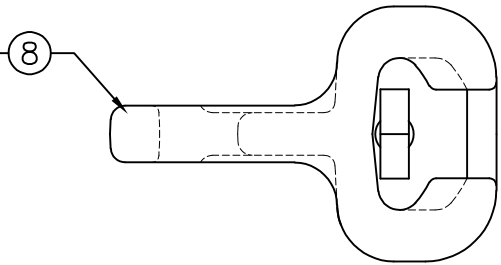


REVISIONS				
NO.	DATE	DESCRIPTION	BY	CKD
1	9/14/23	CHANGED DRAWING FOR NEW PART	KMK	

ASSEMBLE SOCKET EYE TO CLAMP
BODY ON LS-3-S, LS-3-S-BC
AND LS-3-S-LP.

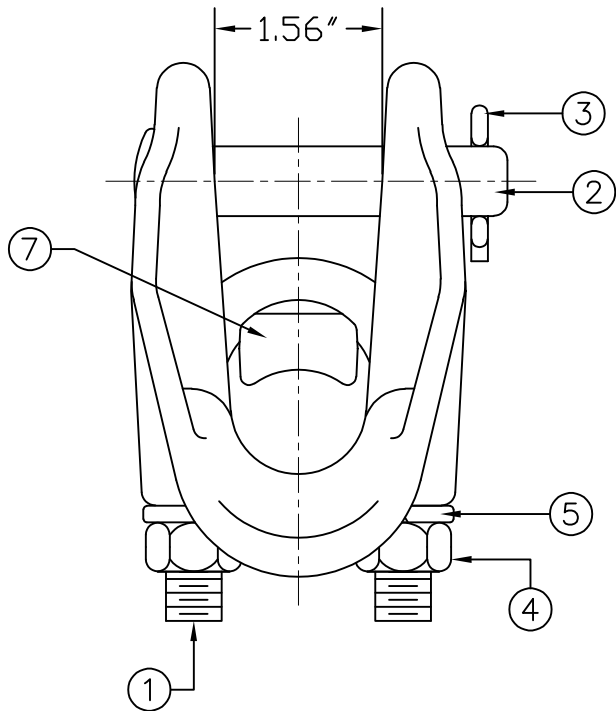

REPLACE CLEVIS PIN IN LS-3-S-BC

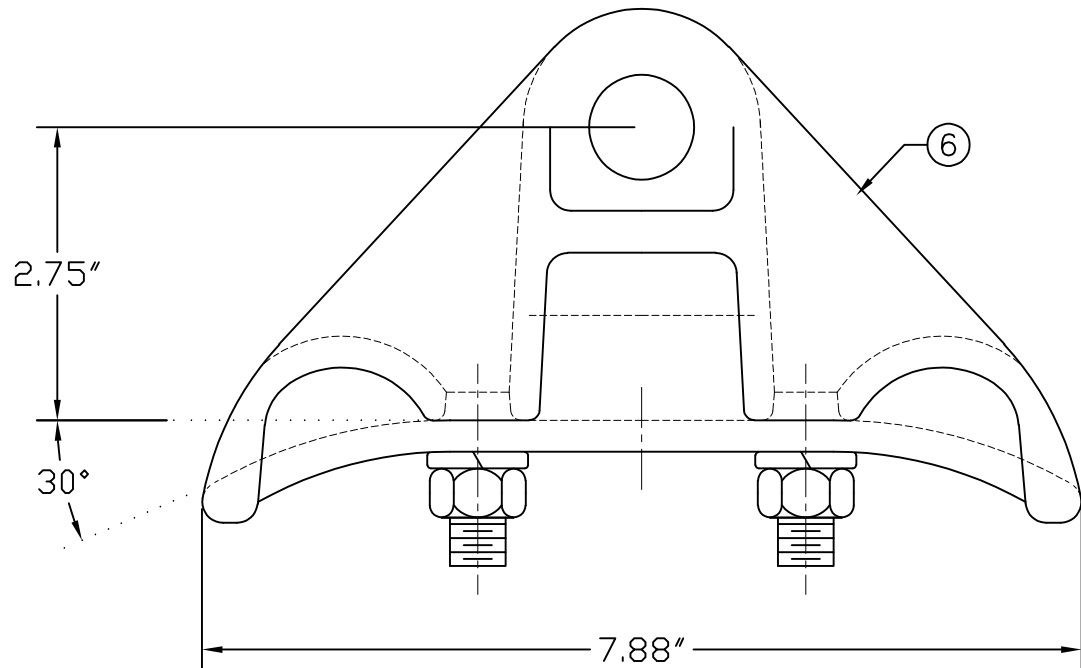

ITEM NO.	PART NO.	CAT. NO.	DESCRIPTION	QUANTITY			
				A	B	C	D
1	P56007	H-0201-12	1/2" U-BOLT	2	2	2	
2	P56059	H-0300-04	5/8"Ø CLEVIS PIN	1	—	—	
3	P56109	H-0360-01	COTTER PIN HMP 5/8"	1	1	—	
4	P56137	H-0400-04	1/2"-13 HEX NUT FIN	4	4	4	
5	P56399	H-0520-04	1/2" LOCKWASHER	4	4	4	
6	P58950	P-0365-01	LS-4 BODY	1	1	1	
7	P59402	P-0836-01	LS-3 & LS-4 KEEPER	1	1	1	
8	P56896P	>SI-1375	SOCKET EYE	1	1	1	
9	P56157	H-0402-05	5/8" HEX JAM NUT	—	1	—	
10	P62607	H-0705-3500	5/8"Ø CLEVIS BOLT	—	1	—	

ASSEMBLY NUMBER	REF. NO.
LS-3-S	A
LS-3-S-BC	B
LS-3-S-LP	C
	D

- NOTES:
1. MATERIAL — BODY AND KEEPER:
A356-T6 ALUMINUM ALLOY
- HARDWARE:
STEEL, HOT DIP GALVANIZED PER
ASTM-A153
- COTTER PIN:
STAINLESS STEEL
2. ULTIMATE STRENGTH: 25,000 LBS.
3. CLAMPING RANGE — 0.75" TO 1.37"

 MACLEAN POWER SYSTEMS A Maclean-fogg Company			
ALUMINUM SUSPENSION CLAMP LS-3-S, LS-3-S-BC, LS-3-S-LP			
DATE: 12/16/2011	SCALE: NONE	NO.	BC8561-3
DWN. BY: CDR	CKD. BY:	APR. BY:	R / 1 SH. 1 OF 1

ENG. REF.

This information is confidential and is the property of Maclean Power Systems. It may not be made public or reproduced except that the Customer may make copies for use solely in instillation, maintenance, and operation of products supplied by Maclean Power Systems.